

MJ11/MM11

TECHNICAL
INFORMATION
DEC CONFIDENTIAL

EP-MJ11-00-TI-A

COPYRIGHT © 1977

FICHE 1 OF 1

JAN 1977

digital

MADE IN USA

MJ11-A MM11

MM11-E

MM11-F

MM11-L

MM11-LP MM11-S

MM11-U/UP

TECH.
TIPS

DOL

DOL

FCR

ECO
QUICK
CHECK

DOL

ECO
QUICK
CHECK

FCR

ECO
QUICK
CHECK

FCO's

ECO
QUICK
CHECK

FCO's

ECO
QUICK
CHECK

FCO's

M J I I A

MJ11-A

THE FOLLOWING MODULES/ASSEMBLIES ARE CONTAINED IN THIS DEVICE.
EACH MAY HAVE ASSOCIATED TECH TIPS, DEC-O-LOG AND FCO's DOCUMENTED
IN THE MODULE/ASSEMBLY CATEGORY OF THE MICROFICHE LIBRARY

G114

G235

H217

H744

H745

M8148

M8149

54-11086

54-11553

54-11581

54-11583

70-06501

70-09769

70-10208

70-10214

70-10497

70-10498

70-10532

70-10580

70-10581

70-10694

70-10695

70-10780

70-10791

70-10824

70-10826

70-10974

70-10975

70-11027

70-11222

70-11223

M

M

1

1

THE FOLLOWING MODULE/ASSEMBLIES ARE CONTAINED IN THIS DEVICE. EACH MAY HAVE ASSOCIATED TECH TIPS,
DEC-O-LOG AND FCO's DOCUMENTED IN THE MODULE/ASSEMBLY CATEGORY OF THE MICROFICHE LIBRARY.

70-06468
70-07263
70-09562

G102
G103
G109
G110
G225
G226
G231
G615
G616
G645

H213
H214

M109
M229
M1091
M7290

TECH.
TIPS

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title MM11-D/DP Memory Backplane			Tech Tip Number MM11-TT-14		
All	Processor Applicability		Author William Aupperles	Rev g	Cross Reference
			Approval William Dimba	Date 8-5-76	

The MM11-D/DP Core Memory Manual states that the G652 (mother board for the MM11-D/DP) is inserted into a "Unibus Backplane". To eliminate any confusion, the "Unibus Backplane" is the modified backplanes DD11-C, D and P used on 11/04, 11/34 systems. Other Unibus Backplanes, such as 11/05, 11/35 and DD-11B expansion backplanes are not compatible with these new memory boards.

PAGE 17	PAGE REVISION g	PUBLICATION DATE August, 1976
---------	-----------------	-------------------------------

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title QUALADYNE 1540 SENSE AMPS				Tech Tip MM11 Number #1
All	Processor Applicability		Author DON ZERESKI	Rev A
			Approval CHUCK DEWEY	Date 6/27/72
Cross Reference				

The Qualadyne 1540 sense amps have had bonding problems. The unit is used in most current DEC sense amplifier boards. The Motorola 1540 should be used as its replacement when necessary. Most of the defective units have been replaced during production. These were used in MM11-E and F memories.

Since the Motorola 1540 units are in short supply, Production is only replacing failing units and are not retrofitting all boards in all product lines. Machines in the field that exhibit strange memory problems that can be localized to sense amp problems should be checked for Qualadyne units with the following date codes: 7014, 7016, 7020, 7022, 7024, 7031, and 7032. These units may be defective and should be replaced as a last resort. We are not suggesting a purge of all Qualadyne units of the above mentioned date codes or future Qualadyne units.

Title H207E MEMORY STACK				Tech Tip MM11 Number #2
All	Processor Applicability		Author TOM KARPOWSKI	Rev A
			Approval CHUCK DEWEY	Date 6/27/72
Cross Reference				

The MM11-E memory will be using a new stack, RCA's H207E. This stack can only be used in an MM11-E. The H207 stack can be used in an MM11-E and MM11-F.

Title MM11-E & F/G102 MODULES				Tech Tip MM11 Number #3
All	Processor Applicability		Author TOM KARPOWSKI	Rev 0
			Approval CHUCK DEWEY	Date 6/1/72
Cross Reference				

ECO G102-00005 has been written to make the G102 module capable of running in the MM11-F memory. This ECO makes this module CS revision D. It has to be at least revision D to run in an MM11-F. This revision can also be used in MM11-E's. Please see that your spares are modified accordingly.

Title INTERLEAVING THE MM11-E MEMORY				Tech Tip MM11 Number #4
All	Processor Applicability		Author JOHN BUZYNSKI	Rev g
			Approval CHUCK DEWEY	Date 6/1/72
Cross Reference				

Interleaving is simply addressing the memory such that adjacent memory banks are selected on alternate cycles. Thus, it is interleavable in 8K increments or blocks. This is implemented by interchanging BUS A01L and BUS A13L inputs to the memory between the bus inputs and memory device select and control. The memory being addressed, for example, in a DAT1 mode is free to complete its cycle after the MSYN L-SSYN I dialog and as soon as the setup times for the bus are satisfied, MSYN L can be reasserted to

Title INTERLEAVING THE MM11-E MEMORY (Continued)				Tech Tip MM11 Number #4		
All	Processor Applicability			Author JOHN BUZYNSKI	Rev 0	Cross Reference
				Approval CHUCK DEWEY	Date 6/1/72	

start a memory cycle in the adjacent memory bank while the first memory bank is completing its cycle. A significant increase in memory throughput occurs.

In the MM11-E the two address bits have to be physically interchanged on the back-plane. It is also necessary to modify M729 control logic module to speed up the SSYNL reset circuit. (Refer to ECO's MM11-E Numbers 17, 19, and 20; M729 number 2; and ECO M1091 number 1).

Remember, when troubleshooting an interleaved memory, that successive addresses reference alternate memory banks.

Title FIELD INSTALLATION OF MM11-E ON PDP-11/45				Tech Tip MM11 Number #5		
All	Processor Applicability			Author ANDY VEROSTIC	Rev 0	Cross Reference
	11/45			Approval ART ZINS	Date 6/7/72	

HARDWARE

Existing M729 control must have ECO #M729-00003 installed for operation on 11/45.

DIAGNOSTICS

All present memory tests will run on the 11/45.

Title FIELD INSTALLATION OF MM11-F ON PDP-11/45				Tech Tip MM11 Number #6		
All	Processor Applicability			Author ANDY VEROSTIC	Rev A	Cross Reference
	11/45			Approval ART ZINS	Date 6/7/72	

HARDWARE

Existing M7290 control must have ECO's #M7290-00002 and 00003 installed for proper operation on the 11/45.

DIAGNOSTICS

All present memory tests run on the 11/45.

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11
Title				Tech Tip MM11-TT	
MM11-E and F MEMORY ADDRESS SELECTION AND INTERLEAVING				Number #7	
All	Processor Applicability	Author	Chuck Dewey	Rev	0
		Approval	Chuck Dewey	Date	9/28/72
					Cross Reference

Address Selection

MM11-E Memories have had two types of address selection modules. The M109 was the original address selector and may still be found in some installations. The M109 causes insertion of two UNIBUS unit loads. This was corrected when the M1091 was introduced (ECO M1091-00001). Selection of addresses when using M109 is described in the hardware manual (DEC-11-HR3B-D).

Both the MM11-E and MM11-F memories now utilize M1091 address selector modules. Figure 2 shows the circuit schematic of the M1091 address selection logic. Figure 1 shows a layout of that portion of the physical module where the addressing is accomplished by insertion or removal of jumper wires. Table 1 lists the following:

- a. Bank Number - These numbers are indicative of the physical system units of MM11-E or F memories.
- b. K Words - This indicates the word quantity for a specific bank in thousands (K) words.
- c. Addresses - The inclusive (octal) word (two byte) addresses within a specific bank of memory are listed here. They assume a non-interleaved configuration.
- d. Bits 17, 16, 15, 14, 13 and 01 Non-Interleaved
These columns show, by an X, that jumper which should be installed in order to respond to a specific memory bank addressing. The 1, 0, A, B, C and D correspond to the identification shown on the module, figure 1, and figure 2.
- e. Bits 13, and 01 Interleaved - These two bits accomplish the interleaving for MM11-F memories and are to be used in place of their counterparts listed for d, above. When used these cause modification of two 4K Banks so that their addressing has the lower (odd) bank with addresses ending with 0 or 4 and upper (even) bank ending with 2 or 6.


Title MM11-E and F MEMORY ADDRESS SELECTION AND INTERLEAVING		Tech Tip Number MM11-TT #7	
All	Processor Applicability	Author Chuck Dewey	Rev 0
		Approval Chuck Dewey	Date 9/28/72
			Cross Reference

Interleaving

Interleaving for MM11-E memories is described in Tech Tip MM11 number 4. It can only be accomplished by system unit wire changes to the back plane. Refer to the ECO's, listed in the Tech Tip, for proper implementation.

MM11-F interleaving is accomplished by manipulation of jumper wires on the M1091 module. These changes are shown in Table 1. It is a normal procedure for the production line to interleave all 8K segments of MM11-F memory on the initial system prior to shipment.

Interleaving of a MM11-E with an MM11-F is not recommended primarily due to the confusion it creates when troubleshooting a system of this nature. It also creates customer misunderstanding since the average memory cycle time specification, in this situation, would not be either the MM11-E or F but somewhere in between.

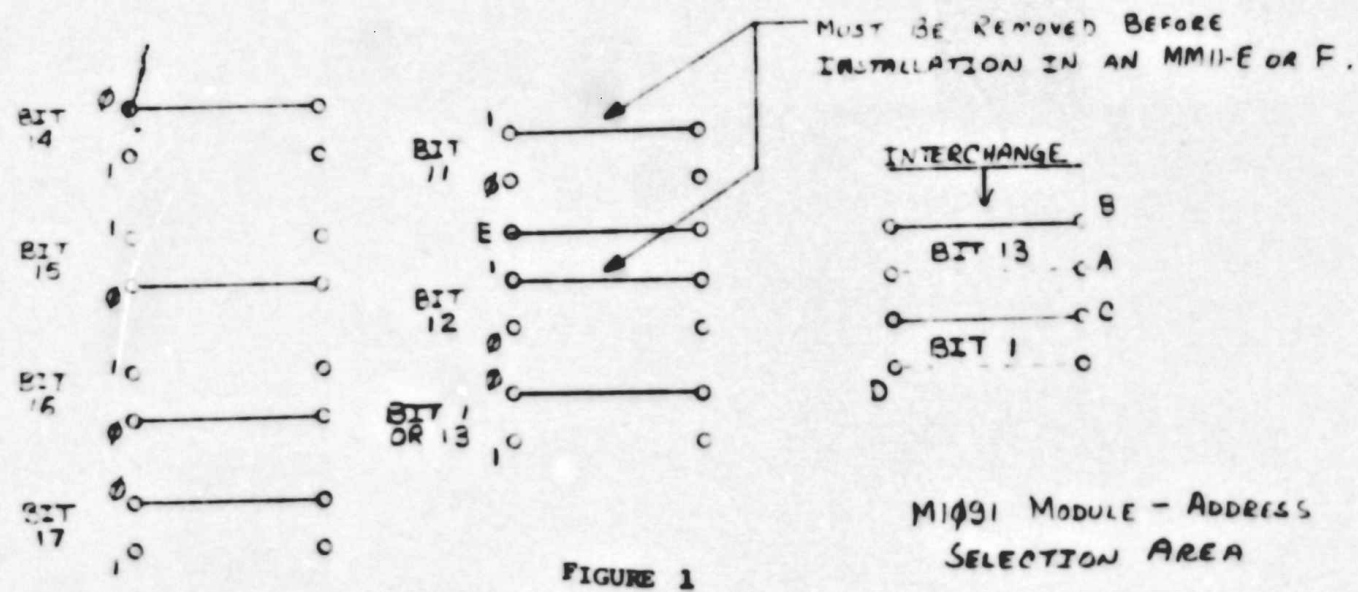

digital

FIELD SERVICE TECHNICAL MANUAL

Option or Designator

12 Bit 16 Bit 18 Bit 36 Bit

MM11

Title MM11-E and F MEMORY ADDRESS SELECTION & INTERLEAVING (CONT'D)

Tech Tip Number MM11-TT #7

Processor Applicability

Author Chuck Dewey Rev g

Cross Reference

All

Approval Chuck Dewey Date 9/28/72

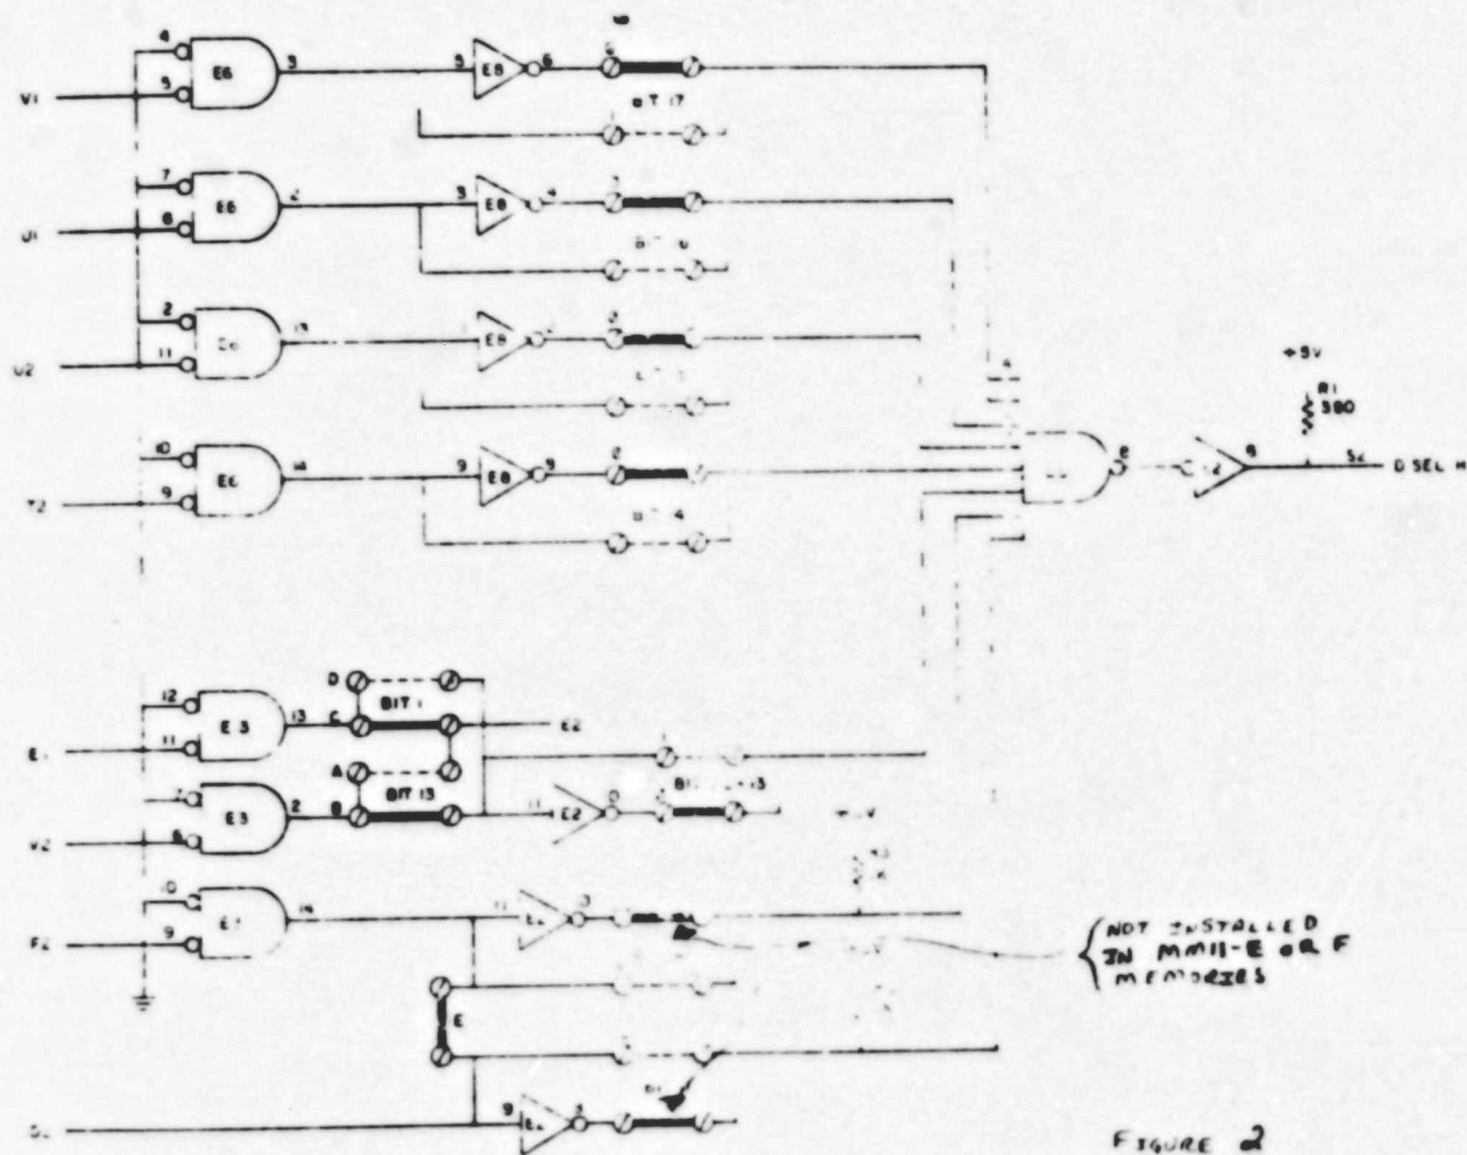


FIGURE 2

Title MM11-E and F MEMORY ADDRESS SELECTION & INTERLEAVING (CONT'D)				Tech Tip MM11-TT Number #7	
Processor Applicability		Author Chuck Dewey		Rev #	
All		Approval Chuck Dewey		Date 9/28/72	
Cross Reference					

TABLE 1

Bank	K WORDS	ADDRESSES		NON-INTERLEAVED MM11-F AND ALL MM11-E MEMORIES								INTERLEAVED MM11-F MEMORY *				
		FROM	TO	17	16	15	14	13	01	13	01					
				1	0	1	0	1	0	A	B	C	D	A	B	C
1	0-4	000000	017776	X	X	X	X	X	X	X	X	X	X	X	X	X
2	4-8	020000	037776	X	X	X	X	X	X	X	X	X	X	X	X	X
3	8-12	040000	057776	X	X	X	X	X	X	X	X	X	X	X	X	X
4	12-16	060000	077776	X	X	X	X	X	X	X	X	X	X	X	X	X
5	16-20	100000	117776	X	X	X	X	X	X	X	X	X	X	X	X	X
6	20-24	120000	137776	X	X	X	X	X	X	X	X	X	X	X	X	X
7	24-28	140000	157776	X	X	X	X	X	X	X	X	X	X	X	X	X
FROM THIS POINT ON A DEVICE SUCH AS MX11, KS11, OR KT11 IS REQUIRED																
8	28-32	160000	177776	X	X	X	X	X	X	X	X	X	X	X	X	X
9	32-36	200000	217776	X	X	X	X	X	X	X	X	X	X	X	X	X
10	36-40	220000	237776	X	X	X	X	X	X	X	X	X	X	X	X	X
11	40-44	240000	257776	X	X	X	X	X	X	X	X	X	X	X	X	X
12	44-48	260000	277776	X	X	X	X	X	X	X	X	X	X	X	X	X
13	48-52	300000	317776	X	X	X	X	X	X	X	X	X	X	X	X	X
14	52-56	320000	337776	X	X	X	X	X	X	X	X	X	X	X	X	X
15	56-60	340000	357776	X	X	X	X	X	X	X	X	X	X	X	X	X
16	60-64	360000	377776	X	X	X	X	X	X	X	X	X	X	X	X	X
17	64-68	400000	417776	X	X	X	X	X	X	X	X	X	X	X	X	X
18	68-72	420000	437776	X	X	X	X	X	X	X	X	X	X	X	X	X
19	72-76	440000	457776	X	X	X	X	X	X	X	X	X	X	X	X	X
20	76-80	460000	477776	X	X	X	X	X	X	X	X	X	X	X	X	X
21	80-84	500000	517776	X	X	X	X	X	X	X	X	X	X	X	X	X
22	84-88	520000	537776	X	X	X	X	X	X	X	X	X	X	X	X	X
DE11 REQUIRED FROM THIS POINT IF MX11 IS IN USE																
23	88-92	540000	557776	X	X	X	X	X	X	X	X	X	X	X	X	X
24	92-96	560000	577776	X	X	X	X	X	X	X	X	X	X	X	X	X
25	96-100	600000	617776	X	X	X	X	X	X	X	X	X	X	X	X	X
26	100-104	620000	637776	X	X	X	X	X	X	X	X	X	X	X	X	X
27	104-108	640000	657776	X	X	X	X	X	X	X	X	X	X	X	X	X
28	108-112	660000	677776	X	X	X	X	X	X	X	X	X	X	X	X	X
29	112-116	700000	717776	X	X	X	X	X	X	X	X	X	X	X	X	X
30	116-120	720000	737776	X	X	X	X	X	X	X	X	X	X	X	X	X
31	120-124	740000	757776	X	X	X	X	X	X	X	X	X	X	X	X	X

BUS ADDRESSING BEYOND THIS POINT RESERVED FOR DEVICES

X DENOTES JUMPER INSERTION ON THE BOARD AT THE IDENTIFIED POINT

* INTERLEAVING CAN ONLY BE ACCOMPLISHED WITH 8K SEGMENTS OF MEMORY. THE XXXXX0 AND XXXXX4 ADDRESSES ARE TO BE ASSIGNED TO ODD BANK MEMORIES

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title DATA ERRORS CAUSED BY DCLO OR INIT ON MM11-K, L, M, S			Tech Tip Number MM11 #8
All	Processor Applicability	Author A.Verostic/D.Dickhut	Rev 3
		Approval Art Zins	Date 9/27/72
			Cross Reference

A problem exists with the 4K-8K PDP-11 memory (MM11-S, MM11, MM11-L) that appears to be hardware data errors, but disappears if every word in memory is accessed. The problem can appear whenever Initialize or DCLO occurs during a memory cycle. This turns off the X-Y current drivers at the wrong time, leaving some cores in a partially switched state. These half-selected cores contribute large amounts of noise when accessing other words, causing intermittent failures.

DCLO occurring during a memory cycle can be eliminated if the power fail trap is used properly. The power fail trap sequence should turn off any peripheral that might access memory (individually, not by using INIT) and halt the processor before DCLO occurs.

The chances of INIT occurring during a memory cycle will be reduced if software avoids using the RESET instruction, particularly inside tight loops. The condition of half selected cores can be cured by accessing every word in memory to assure all cores are fully switched. Once this is completed, data may be read and written normally.

Title		Tech Tip	
MM11-K, L, M, and S Field Problem Summary		MM 11	
Processor Applicability		Number	
All		TT-9	
Author		Rev	
D. Dickhut		#	
Approval		Date	
C. Dewey		11/20/72	
Cross Reference			

This Tech Tip is a summary of field problems and their solutions for the MM11-K, L, M, and S memories which are found in ME11L which uses only MM11-L, 11/05 and 11/10 which use MM11-K (4K) 11/05 only and MM11-L (8K), 11/40 which uses only MM11-L (8K), and 11/45 which uses only MM11-S (8K).

1. Random Memory Locations are Altered During Power Fail

The contents may be altered while running Power Fail Diagnostic or by simply turning the machine on and off. ECO G231-5 solves this problem.

2. Memories do not have to be swapped as a system (all 3 modules)

Each system that is shipped has a serial number stamped on side 2 of each module. This number is the same on all 3 modules and is strictly for in-house test purposes only. The memories can be and should be maintained on a module swap basis instead of a system basis (stack not spared anyway). The system serial number can be used in a case where much swapping has taken place and now the modules are to be put back in their original configuration. By matching the serial number, each system can be reunited and a lot of adjustment time can be saved.

3. What adjustments to make when a module is swapped.

When anyone of the 3 modules that make up the memory system is swapped, the strobe adjustment must be made to ensure system reliability (When the G110 module is swapped, it has the strobe pot but the setting cannot be taken for granted) The procedure to use for strobe adjustment is as follows:

1. If strobe adjustment is too far off, EXAM and DEP may not work. To get strobe in the ballpark, sync on pin CU2 of the G110 model (signal READ H) and Test Point 5 of E05 pin 9 for strobe. Press EXAM rapidly and adjust strobe using pot on G110 for a 250 ns delay from rising edge of READ H to rising edge of strobe. This should allow diagnostics to be read in.
2. Load Worst Case Noise Diagnostic (W.C.N. should be used not a Branch SELF)
3. Load Address 200 and START or Load Address 202 to select the desired bank.
4. Sync on pin CU2 of G110 (signal READ H) while scoping Test Point 5 or E05 pin 9 for strobe and margin strobe by turning pot CW until the diagnostic fails and then CCW until it fails. A complete pass of the diagnostic should be made (within reasonable limits for large core systems) at each high and low end point to ensure that is the true end point. Notice the time from the leading edge of READ H to strobe in each case. The total strobe window should be 40 ns or greater and set strobe in the middle of the high and low points. If the window isn't at least 40 ns, then the entire system should be changed because margin problems can only be dealt with back at Module Repair Depot.

This procedure is graphically illustrated and explained in the ME11L, MM11-S, 11/05, and 11/40 manuals.

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM 11
Title MM11-K, L, M, and S Field Problem Summary (Continued)				Tech Tip Number	MM 11 TT-9
All	Processor Applicability		Author D. Dickhut	Rev <u>g</u>	Cross Reference
			Approval C. Dewey	Date 11/20/72	

4. DEC memory stack threshold problem

Some DEC or RCA memory stacks (DEC stack identified by label on side 2; some may have RCA stickers) have a threshold problem and will not exhibit the normal threshold margins. In order to use these previously rejected stacks in production, the sense circuitry on the G110 was modified. In the field, if a memory stack is swapped and it is a DEC stack, the G110 module should be checked to see if ECO #8 is installed. If it isn't and this is a non-field effect ECO, a G110 module with that ECO should be obtained from the Maynard Module Repair Depot. The new DEC stack may or may not have this problem and probably will operate properly even if it does. However, with large systems or several NFR (DMA) devices, intermittent failures may occur over a long period of time.

Title		ECO DOCUMENTATION FOR THE MM11K, MM11L and MM11S MEMORIES		Tech Tip Number		MM11 TT-10	
All	Processor Applicability		Author	G. Cable	Rev #	Cross Reference	
			Approval	C. Dewey	Date		

The following Tech Tip will attempt to clarify the confusion regarding the ECO status for the MM11S, MM11K and MM11L memories.

G110 Modules

In the near future there will be two separate types of G110 Modules in the field. The first type of G110 Module is an Etch Revision C Module which already exists in the field. The second type of module will be an Etch Revision E.

It will not be possible to ECO the Etch Revision C Module so that it will be electrically equal to the Etch Revision E Module. For this reason it has become necessary to create two separate sets of engineering drawings to cover the two different modules.

The engineering drawings for the Etch Revision C Module will have a circuit schematic revision of E with one numeric digit following. Each ECO released will increment the numeric digit by one (i.e. E1, E2, E3, and etc.).

The engineering drawings for the Etch Revision E Module will have a circuit schematic revision of an alpha character starting at F and continuing sequentially (i.e. F, H, J, K, and etc.).

Below is a chart that shows the revisions for the two G110 Modules.

G110 Etch Revision C	
ECO No.	CS Revision
G110-0001	A
G110-0002	B
G110-0003	N/A
G110-0003A	N/A
G110-0004	D
G110-0005	E
G110-0007	E-1
G110-0008	E-2
G110-0009	E-3*
G110-0010	E-4*
G110-0012	E-5

G110 Etch Revision E	
ECO No.	CS Revision
G110-0006	F
G110-0011	H

*Note: There have been a number of Etch Rev C modules shipped that were marked CS Rev H and J these should have been marked CS Rev E3 and E4 respectively.

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title ECO DOCUMENTATION FOR THE MM11K, MM11L and MM11S Memories (Continued)				Tech Tip Number MM11-TT-10	
All Processor Applicability		Author G. Cable	Rev g	Cross Reference	
x		Approval C. Dewey	Date 12/12/72		

G231 Module

There will also be two separate types of G231 Modules in the field in the near future. For this reason it has become necessary to create two sets of engineering drawings.

The first type of G231 Module will be an Etch Revision of C. All future ECO's for this module will use a circuit schematic revision of E with a numeric digit following. Each ECO released will increment the numeric digit by one (i.e. E4, E5, E6 and etc.).

The second type of G231 Module will be an Etch Revision of E. All future ECO's for this module will use a circuit schematic revision with only an alpha character as a designator starting at CS Revision F and incrementing thru the alphabet (i.e. F, H, J, K, and etc.).

Below is a chart that shows the revisions for the two G231 Modules.

G231 Etch Revision C			G231 Etch Revision E	
ECO No.	CS Revision	Stamped on Module	ECO No.	CS Revision
G231-0001	C	C	G231-0004	F
G231-0002	N/A	N/A		
G231-0003	C-1	E		
G231-0005	1	E-1		
G231-0006	2	E-2		
G231-0007	3	3		
G231-0008	3A	3A		
G231-0009	E4	E4		

Refer to PDP 11/05 Systems Tech Tip #14 for a detailed listing and description of memory ECO's.

Title				Tech Tip	
New MM11 Option Designations				Number	
				MM11-TT-11	
All	Processor Applicability			Author	Rev
				D. Dickhut	g
			Approval	C. Dewey	Date
					1/19/73
Cross Reference					

This tech tip is to define the new variations of memories that are in existence and how they differ from the present MM11-L and S memories. The MM11-L and S are defined again for reference.

MM11-L (8K X 16, 900 ns)

It consists of a G110, G231 and H214 and is used on 11/05, 11/10, ME11-L and 11/40.

MM11-S (8K X 16, 900 ns)

This consists of a G110, G231, H214, and a system unit. It is used on 11/35, 11/40 to 11/45.

MM11-LP (8K X 18, memory parity)

This consists of a G109, G231 and H215 and is designed for memory parity. It plugs into a MF11-LP.

MF11-LP (Parity Option)

This is a memory parity option that consists of a nine slot backplane, one MM11-LP and one M7259 double height double width memory parity controller. The backplane can accommodate three MM11-LP's. This option is used on 11/35, 11/40 and 11/45.

MF11-L

This is a memory option that consists of a nine slot backplane and one MM11-L. It can accommodate three MM11-L and is used on 11/35, 11/40 and 11/45.

MB11-S (8K X 16)

This is a special 8K X 16 memory with a 850 ns cycle time and consists of a G110-YA, G231, and H214-YA. This memory is used only on 11/45 and exists in very limited quantities.

G109-YA (for reference only)

Module used only on PDP15 memories.

It is important to remember that the modules mentioned in the above definitions are not interchangeable with a similar looking type in another category. For example a G109 is not interchangeable with a G110 nor is a G110 interchangeable with a G110-YA. When a memory module is replaced or swapped, it should only be replaced with the exact same module type, even though another type may appear to work.

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM 11


Title MM11- E and F in BALL-B/D/F Mounting Boxes				Tech Tip Number MM11-TT-12	
All	Processor Applicability		Author B. Dimbat	Rev 0	Cross Reference
			Approval C. Dewey	Date 3/14/73	

MM11E and MM11F memories cannot be installed in the 11/40 box. They cannot be installed in BALL-B/D/F boxes. They can be used on the 11/40 system but only if they are installed in an 11/20 type box (BALL-ES), which has its own power supply.

MM11E/F's, installed in an 11/40 box, will lose data during the power down sequence.

Title		MM11 L, S, K Memory Address Decode		Tech Tip Number		MM-TT-13	
All	Processor Applicability		Author	John Alston	Rev	ø	Cross Reference
			Approval	B. Dimbat	Date	6/1/73	

The diagram and tables supplied here are to aid F/S men when they are troubleshooting MM11L, S & K memories by relating the drive signals on the G231 with the addresses that generate them.

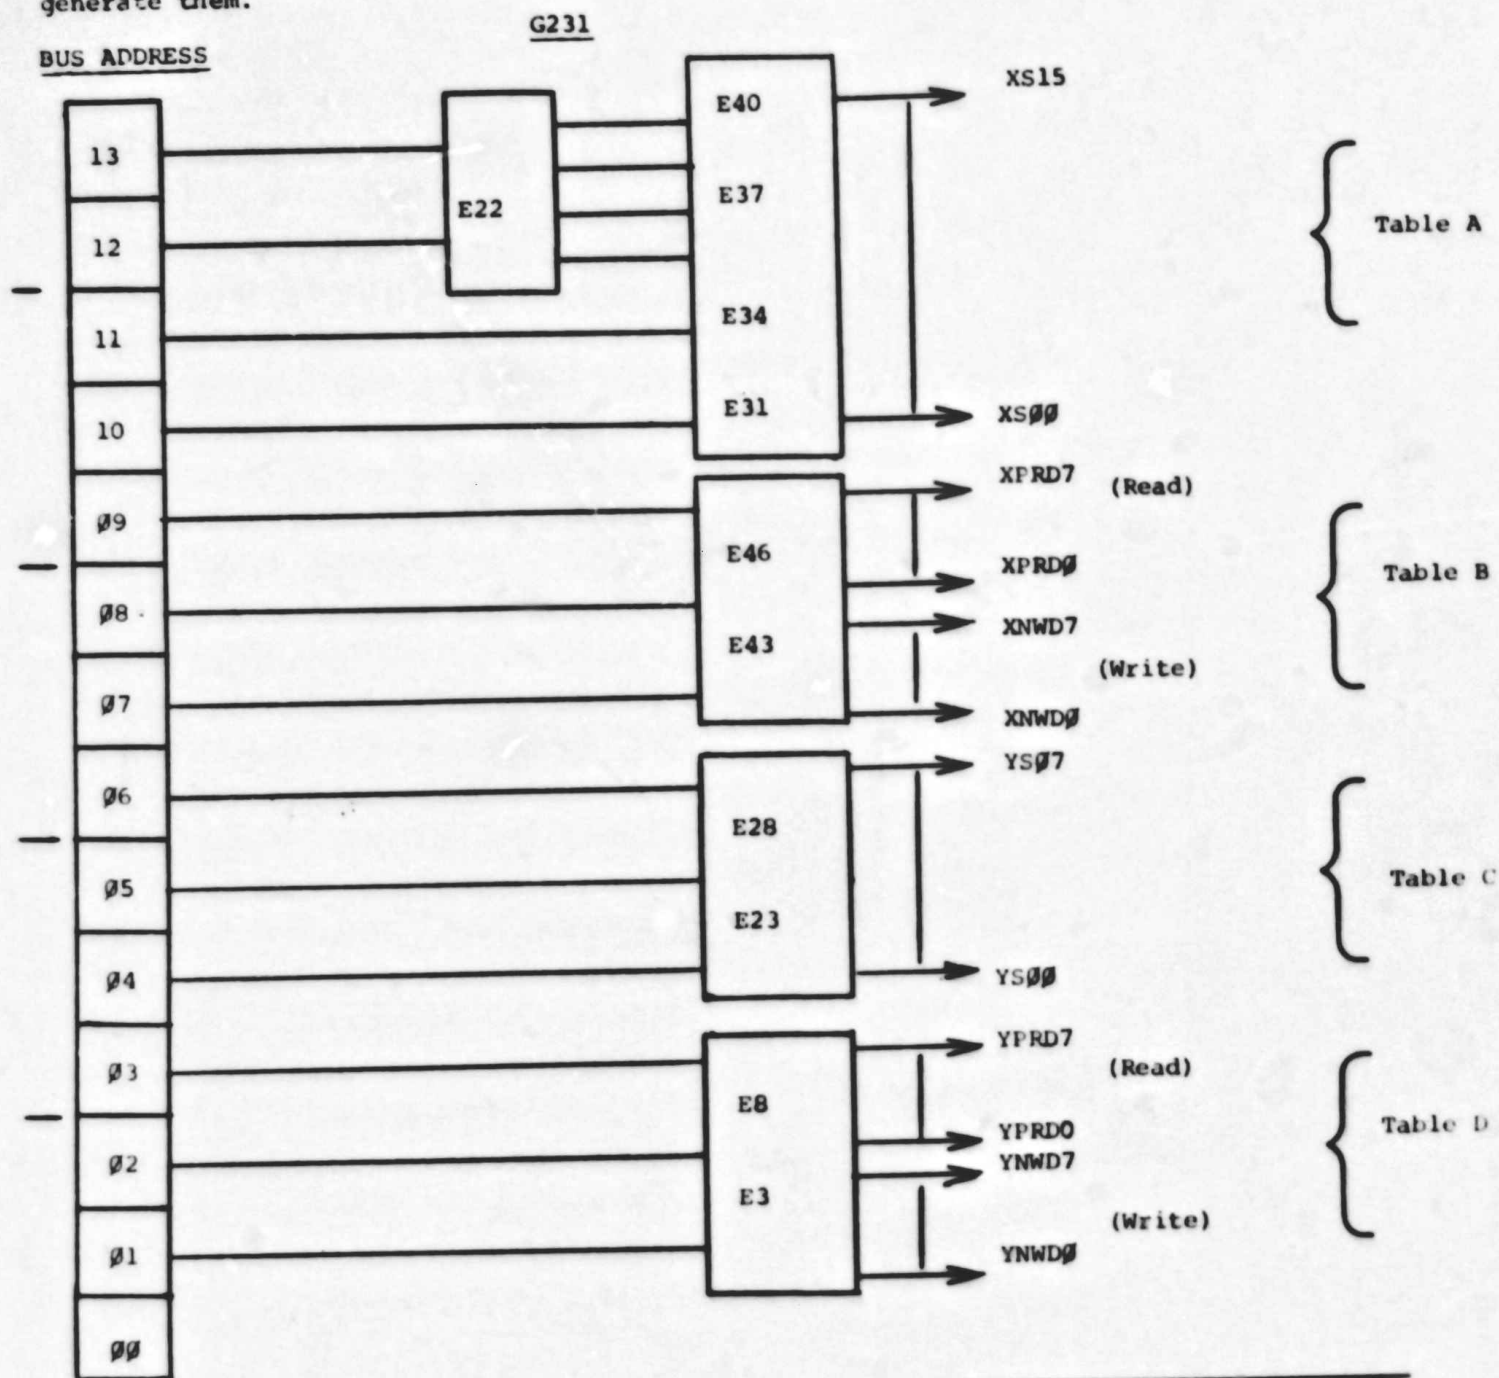

digital	FIELD SERVICE TECHNICAL MANUAL				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title MM11 L, S, K Memory Address Decode			Tech Tip Number MM11-TT-13		
All	Processor Applicability		Author J. Alston	Rev g	Cross Reference
			Approval B. Dimbat	Date 6/1/73	

	A11=1, A10=1	A11=1, A10=0	A11=0, A10=1	A10=0, A11=0
A13=1 A12=1	XS15	XS14	XS13	XS12
	E40			
A13=1 A12=0	XS11	XS10	XS09	XS08
	E37			
A13=0 A12=1	XS07	XS06	XS05	XS04
	E34			
A13=0 A12=0	XS03	XS02	XS01	XS00
	E31			

TABLE A

		A08=1, A07=1	A08=1, A07=0	A08=0, A07=1	A08=0, A07=0
Read Cyc.	A09=1	XPRD7	XPRD6	XPRD5	XPRD4
		E46			
Write Cyc.	A09=0	XPRD3	XPRD2	XPRD1	XPRD0
		E43			
Read Cyc.	A09=1	XNWD7	XNWD6	XNWD5	XNWD4
		E46			
Write Cyc.	A09=0	XNWD3	XNWD2	XNWD1	XNWD0
		E43			

TABLE B

Title MM11, L, S, K Memory Address Decode		Tech Tip Number MM-TT-13	
All	Processor Applicability	Author J. Alston	Rev 0
		Approval B. Dimbat	Date 6/1/73
Cross Reference			

TABLE C

	A05=1, A04=1	A05=1, A04=0	A05=0, A04=1	A05=0, A04=0
A06=1	YS07	YS06	YS05	YS04
	_____ E28 _____			
A06=0	YS03	YS02	YS01	YS00
	_____ E23 _____			

TABLE D

		A02=1, A01=1	A02=1, A01=0	A02=0, A01=1	A02=0, A01=0
Read Cyc.	A03=1	YPRD7	YPRD6	YPRD5	YPRD4
	_____ E8 _____				
Write Cyc.	A03=0	YPRD3	YPRD2	YPRD1	YPRD0
	_____ E3 _____				
Write Cyc.	A03=1	YNWD7	YNWD6	YNWD5	YNWD4
	_____ E8 _____				
Write Cyc.	A03=0	YNWD3	YNWD2	YNWD1	YNWD0
	_____ E3 _____				

MM11-E

MM11-E/F PARTS BREAKDOWN

7006405	- Logic Frame
7006468	- MM11-E Wired assembly
70007263	- MM11-F Wired assembly
G102	- Sense Inhibit Card
G103	- Memory Levels & Gates
G225	- X-Y Current Generator
G226	- X-Y Current Generator
H207	- 4K 16 Bit Core Memory Stack
M109	- Device Select
M729	- MM11-E Control Logic
M1091	- Device Select
M7290	- Control Logic & Timing
MM11-E	- 4K Single Memory Unit
MM11-EX	- 4K Interleaved
MM11-F	- 4K Single Memory Unit
MM11-FP	- Single Parity Memory Unit
MM11-FX	- Interleaved Memory (jumpers)

DOL

Engineering Change Order Log

DEC-O-LOG

ECO SYNOPSIS pages are updated and published continuously in conjunction with the issuance of ENGINEERING CHANGE ORDERS for all DEC products and are available upon subscription from:

DIGITAL EQUIPMENT CORPORATION
FIELD SERVICE INFORMATION CENTER
MAYNARD, MASSACHUSETTS 01784

digital EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

ECO SYNOPSIS FOR LOGIC OR OPTION

PDP-11 MEMORY **MMII-E**

PRODUCT LINE	PUBLICATION DATE OF THIS SYNOPSIS PAGE	PAGE REVISION
PDP-11	JULY 1976	0

ECO NO.	LOGIC OR OPTION SERIAL NO.'S AFFECTED	FIELD CODE	SYNOPSIS
MM11-E 00001	>MM11-E	M	JAN 70 - CHANGES STACK HINGE TOLERANCE AND ADDS A FLATNESS SPECIFICATION.
MM11-E 00002	MM11-E 110-120	D	JAN 70 - MAKES CORRECTIONS TO THE WIRE LIST.
MM11-E 00003	MM11-E 110-120	D	JAN 70 - ADDS CURRENT LOOPS FOR X AND Y CURRENT MEASUREMENTS AND SCOPING. UPDATES THE LIST OF MANUALLY INSTALLED WIRING.
MM11-E 00004	>MM11-E	D	JAN 70 - UPDATES THE MM11-E PRINT SET.
MM11-E 00005	N.A.	D	JAN 70 - CORRECTS A DRAWING WHICH WAS DRAWN IN REVERSE. ADDS CLARIFICATION NOTES.
MM11-E 00006	MM11-E 110-239	D	FEB 70 - ADDS TWO WIRES WHICH WERE PREVIOUSLY OMITTED FROM THE WIRE LIST.
MM11-E 00007	>MM11-E	M	FEB 70 - CHANGES THE SPECIFICATION FOR THE MEMORY HINGE. SPECIFIES THE USE OF SELF EXTINGUISHING PLASTIC FOR MM11-E FABRICATION.
M729 00001	ALL M729	D	MAR 70 - REVISES SEVERAL DESIGN CONSIDERATIONS; CHANGES THE ETCH LAYOUT AND SEVERAL COMPONENTS. MODULE STATUS - UNRELEASED. M729 CIRCUIT SCHEMATIC REVISION A ETCHED BOARD REVISION B
G226 00003	>G226	D	MAR 70 - ADDS DIODES TO CLAMP OUTPUT VOLTAGE SPIRES WHICH COULD EXCEED THE TRANSISTOR BREAKDOWN RATING. MODULE STATUS - UNRELEASED. G226 CIRCUIT SCHEMATIC REVISION C

ECO NO.	LOGIC OR OPTION SERIAL NO.'S AFFECTED	FIELD CODE	SYNOPSIS
G102 00002	>PDP-11	F	MAR 70 - REPLACES THE 8881 IC WITH A 74H011 TO INCREASE SPEED. THIS MODULE CANNOT BE REWORKED IN THE FIELD. (ERROR CORRECTED BY ECO G102-00003) G102 CIRCUIT SCHEMATIC REVISION B ETCHED BOARD REVISION D
G103 00002	ALL PDP-11	F	MAR 70 - REPLACES SN7410N IC WITH SN74H10N TO INCREASE SYSTEM SPEED. THE MODULE CANNOT BE REWORKED IN THE FIELD. G103 CIRCUIT SCHEMATIC REVISION B
G102 00003	>PDP-11	F	APR 70 - CORRECTS AN ERROR IN ECO G102-00002; CHANGES 100 OHM RESISTORS TO 75 OHMS. G102 CIRCUIT SCHEMATIC REVISION B ETCHED BOARD REVISION D
MM11-E 00008	>MM11-E	P	APR 70 - CORRECTS DIMENSIONS ON THE ETCHED BOARD DRAWING TO MEET STANDARDS.
MM11-E 00009	N.A.	P	APR 70 - CHANGES WIRING AND TUBING REFERENCES ON THE PARTS LIST.
G103 00004	ALL PDP-11	F	APR 70 - CHANGES R17 FROM A 100 OHM TRIMPOT TO A 500 OHM TRIMPOT. G103 CIRCUIT SCHEMATIC REVISION C
G616 00001	N.A.	D	APR 70 - DELETES THE MODULE HANDLE FROM THE G616 PARTS LIST AND ADDS IT TO THE MEMORY STACK PARTS LIST. G616 CIRCUIT SCHEMATIC REVISION B
G616 00002	>G616	D	MAY 70 - INTERCHANGES THE POSITIONS OF THERMISTOR R11 AND RESISTOR R1. G616 CIRCUIT SCHEMATIC REVISION C
MM11-E 00010	N.A.	P	MAY 70 - ADDS A MODULE CLIP HOLDER PART NUMBER AND ITS DESCRIPTION TO THE PARTS LIST.
MM11-E 00011	>MM11-E	P	MAY 70 - ADDS MM11-E ALIGNMENT PROCEDURE TO THE PRINT SET.
MM11-E 00012	>MM11-E	D	MAY 70 - CHANGES A HOLE SIZE AND ADDS TWO OTHERS FOR THE G616.

LEGEND

FIELD CODE

- F - Field action may be required
- D - Design ECO
- P - Print or Wire List change
- M - Mechanical ECO

SYMBOL

- > - ECO applicable to future production

ECO CHARGES

- Charges are coded within the synopsis: (SX**SY**SZ)
- SX - Charge for Specs and updated prints only
- SY - Charge for necessary parts only
- SZ - Charge for on site labor only. Installation by DEC

NOTE Charges are additive (SX+SY+SZ - Total on site charge for ECO installation by DEC)

MASTER DRAWING LIST REVISIONS	
REV	ECO NUMBER
A	MM11E-00002
B	MM11E-00003
C	MM11E-00004
D	MM11E-00005
E	MM11E-00006
F	PDP11-00004

WIRE LIST REVISIONS	
REV	ECO NUMBER
A	MM11E-00002
B	MM11E-00006

LEGEND

FIELD CODE

- F - Field action may be required
- D - Design ECO
- P - Print or Wire List change
- M - Mechanical ECO

SYMBOL

- > - ECO applicable to future production

ECO CHARGES

- Charges are coded within the synopsis: (SX**SY**SZ)
- SX - Charge for Specs and updated prints only
- SY - Charge for necessary parts only
- SZ - Charge for on site labor only. Installation by DEC

NOTE Charges are additive (SX+SY+SZ - Total on site charge for ECO installation by DEC)

MASTER DRAWING LIST REVISIONS	
REV	ECO NUMBER
H	MM11E-00009
J	MM11E-00010
K	MM11E-00011

WIRE LIST REVISIONS	
REV	ECO NUMBER

Engineering Change Order Log

DEC-O-LOG

ECO SYNOPSIS pages are updated and published continuously in conjunction with the issuance of ENGINEERING CHANGE ORDERS for all DEC products and are available upon subscription from:

DIGITAL EQUIPMENT CORPORATION
FIELD SERVICE INFORMATION CENTER
MAYNARD, MASSACHUSETTS 01754

digital EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

ECO SYNOPSIS FOR LOGIC OR OPTION

PDP-11 MEMORY **MM11-E**

PRODUCT LINE	PUBLICATION DATE OF THIS SYNOPSIS PAGE	PAGE REVISION
PDP-11	APRIL 1971	A

ECO NO.	LOGIC OR OPTION SERIAL NO.'S AFFECTED	FIELD CODE	SYNOPSIS
MM11-E C0017	MM11-E AS REQUIRED	F	JAN 71 - CORRECTS THE TEST PROCEDURE TO SPECIFY CHANGING THE STROBE SETTING FROM 210 NSEC TO 220 NSEC TO IMPROVE MEMORY PERFORMANCE. ECO MM11E-C0020 SUPERSEDES THIS 220 NSEC STROBE SETTING, RETURNING IT TO 210 NSEC. SOMETIMES CURRENT WAS TOO HIGH FOR OPTIMUM PERFORMANCE WHEN ADJUSTING THE REFERENCE VOLTAGE. CHANGES THE WIRE LIST. UPDATES THE BLOCK SCHEMATIC TO REFLECT CHANGES MADE TO THE X729 CIRCUIT SCHEMATIC. UPDATES TIMING AND FLOW DIAGRAMS.
MM11-E C0018	MM11-E	M	JAN 71 - ORDERS SLOTTING OF THE 288 PIN PLUGS ENDS TO ELIMINATE THEM BREAKING OUT WHEN QUAD SIZE CARDS ARE INSERTED AND REMOVED.
MM11-E C0019	N/A	P	MAR 71 - UPDATES DOCUMENTATION TO INCLUDE THE M1091 MODULE. UPDATES PRINTS TO INCLUDE INSTRUCTIONS FOR INTERLEAVING MEMORIES.
MM11-E C0020	MM11-E WITH ECO MM11E-C0017	F	MAR 71 - THIS ECO RESCINDS THE STROBE SETTING SPECIFICATION OF ECO MM11E-C0017. CORRECTS THE TEST PROCEDURE TO SPECIFY SETTING THE STROBE AT 210 NSEC. SETTING IT AT 220 NSEC AS SUGGESTED IN ECO MM11E-C0017 IS TOO LATE FOR OPTIMUM PERFORMANCE.

R624

ECO NO.	LOGIC OR OPTION SERIAL NO.'S AFFECTED	FIELD CODE	SYNOPSIS
			REFERENCE ECO G102-B0034
G102 C0005	ALL ME10 >MM11-E	F	JUN 70 - CHANGES CIRCUITRY TO PROVIDE +6.8VDC INSTEAD OF +5VDC FOR THE SENSE AMPLIFIERS. ADDS A HEAT SINK TO J4 TO PROVIDE ADEQUATE HEAT DISSIPATION. BOTH OF THESE CHANGES ARE ORDERED FOR IMMEDIATE RETROFIT IN THE ME10 BUT ARE TO BE PHASED IN ON THE MM11-E. CHANGES CIRCUITRY TO SPEED UP TURN-OFF TIME FOR THE STACK DISCHARGE CIRCUITS. THIS CHANGE IS TO BE PHASED IN ON BOTH THE ME10 AND MM11-E. THE MODULE CAN BE REWORKED IN THE FIELD.
G225 B0003	ALL MM11-E	F	JUL 70 - REDUCES THE VALUE OF RESISTOR R22 TO 2.0K TO SPEED UP STABILIZATION OF THE VCC CURRENT REFERENCE VOLTAGE. SOLVES THE PROBLEM OF LOSS OF MEMORY DATA DURING POWER UP OR POWER DOWN.
MM11-E A0013	>MM11-E	M	JUL 70 - SPECIFIES A REWORKING OF THE MODULE HOLDERS.
MM11-E B0014	MM11-E 102-953>	P	AUG 70 - DELETES CONFLICTING REFERENCES TO THE IC'S ON THE G102 FROM THE MM11E-04 LOGIC PRINT.
MM11-E A0015	MM11-E 102-953>	F	SEP 70 - CONNECTS THE SIGNAL BUS "AC LO L" FROM THE POWER BUS TO THE UNIBUS. CONNECTS THE SIGNAL BUS "UC LO L" FROM THE POWER BUS TO THE UNIBUS. THESE CHANGES ENSURE PROPER OPERATION OF THE POWER FAIL OPTION IN MULTIPLE MUX SYSTEMS. THIS ECO MUST BE INSTALLED IN CONJUNCTION WITH ECO'S M930-A0001, K111-A0007, AND S400475-A0006 AND IS APPLICABLE TO ALL MULTIPLE MUX SYSTEMS.
MM11-E C0016	ALL MM11-E SHIPPED JULY- DEC., 1970	F	AUG 70 - PROVIDES A COPY OF THE S400 WIRE TABLE AND INSTRUCTIONS FOR CORRECTING IMPROPERLY WIRING UNITS WHICH WERE SHIPPED BETWEEN JULY AND DECEMBER OF 1970. SYMPTOMS OF THIS MEMORY WIRING PROBLEM INCLUDE DATA ERRORS, LOW MEMORY MARGINS, AND NON-INTERCHANGEABILITY OF G102 MODULES.

MM11E-00021 CODE: P ML: V
MAY 71 - PROBLEM Packaging instructions for the PDP-11 memory stack are not included in the print set.
CORRECTION: Add packaging instructions to MM11E drawing index list.
In-plant effectivity: Documentation change only.

MM11E-D0022 CODE: DF ML: W
MAR 72 - PROBLEM Under some conditions, when other options are placed along side an MM11E, they fail to operate correctly.
CORRECTION: Install a module protection plate.
In-plant effectivity: Retrofit all MM11E's as required.
Field effectivity: All MM11E as required. Time To Install And Test 10 Hour.
(Kit Contents -
FCO-Prints And Parts)

MM11E-023 CODE: P ML: Y
APR 72 - CORRECTION Update test procedure.
In-plant effectivity: Documentation change only.

MM11E-B0024 CODE: F ML: AA WL: E
MAY 72 - PROBLEM 1: Strobe signals and TINH have too much noise on them.
CORRECTION 1: Install twisted pair wiring for these signals.
PROBLEM 2: READ H signal has too many loads on it.
CORRECTION 2: Develop another READ H signal to share the load.
In-plant effectivity: Rework immediately.
Field effectivity: Retrofit all MM11E.
CS revision E is created. Time To Install And Test 10 Hour.
(Kit Contents: FCO-Prints Only)

LEGEND

FIELD CODE
F = Field action may be required
D = Design ECO
P = Print or Wire List change
M = Mechanical ECO

SYMBOL
> = ECO applicable to future production

ECO CHARGES
Charges are coded within the synopsis (S, B, Y, **BZ)
S = Charge for Sides and updated prints only
B = Charge for necessary parts only
Y = Charge for an end label only. Installation by DEC
NOTE: Charges are additive (S+B+Y+Z = Total on site charge for ECO installation by DEC)

MASTER DRAWING LIST REVISIONS

REV	ECO NUMBER	REV	ECO NUMBER
L	MM11E-A0013		
M	MM11E-B0014		
P	MM11E-A0015		
N	MM11E-C0016		

WIRE LIST REVISIONS

REV	ECO NUMBER	REV	ECO NUMBER
C	MM11E-A0015		

JUN 7 1970
MM11-E PAGE 3

LEGEND

FIELD CODE
F = Field action may be required
D = Design ECO
P = Print or Wire List change
M = Mechanical ECO

SYMBOL
> = ECO applicable to future production

ECO CHARGES
Charges are coded within the synopsis (S, B, Y, **BZ)
S = Charge for Sides and updated prints only
B = Charge for necessary parts only
Y = Charge for an end label only. Installation by DEC
NOTE: Charges are additive (S+B+Y+Z = Total on site charge for ECO installation by DEC)

MASTER DRAWING LIST REVISIONS

REV	ECO NUMBER	REV	ECO NUMBER
K	MM11E-C0017		
L	MM11E-D0022		
F	MM11E-A0019		
G	MM11E-C0020		

WIRE LIST REVISIONS

REV	ECO NUMBER	REV	ECO NUMBER
D	MM11E-C0017		

JUN 7 1976

ECO
QUICK
CHECK

MM11-E/F FIELD CODED ECO'S

G102	B2, B3, C4, B6
G103	C2, C4, C5, C7
G225	C3, C7
G226	C4
M729	B2, C3 & A & B
M1091	C1
M7290	C2, C3
MM11-E	C15, C16, C17, C20, D22, B24
MM11-F	D1, C3

MM11-E/F ECO PARTS

<u>NAME</u>	<u>ECO#</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G102	#2	1	19-09849	I.C.
	#3	8	13-03064	Resistor
	#4	4	10-00027	Capacitor
		4	13-09995-0	Resistor
		1	16-09996-0	Indicator
	#6	4	10-00018	Capacitor
G103	#2	3	19-09057	I.C.
	#4	1	13-05631	Resistor
	#5	2	13-02602	Resistor
		2	13-09994-0	Resistor
		1	13-00295	Resistor
		2	10-00027	Capacitor
		1	11-09991	Diode
		1	11-09990	Diode
		1	16-09996-0	Conductor
		1	12-10001-0	Heat sink
	#7	1	10-10274	Capacitor
G225	#3	1	13-00417	Resistor
	#7	4	90-08493	Washers
A/R			90-08268	Thermal compound
G226	#4	1	10-10274	Capacitor
M792	#3	1	19-05547	I.C.
M1091	#1	1	M1091 etch "B"	if applicable module
MM11-F	#1	1	74-08490	Memory shield
MM11-E	#2	1	74-08490	Memory shield

MM11-E/F PARTS BREAKDOWN

7006405	- Logic Frame
7006468	- MM11-E Wired assembly
70007263	- MM11-F Wired assembly
G102	- Sense Inhibit Card
G103	- Memory Levels & Gates
G225	- X-Y Current Generator
G226	- X-Y Current Generator
H207	- 4K 16 Bit Core Memory Stack
M109	- Device Select
M729	- MM11-E Control Logic
M1091	- Device Select
M7290	- Control Logic & Timing
MM11-E	- 4K Single Memory Unit
MM11-EX	- 4K Interleaved
MM11-F	- 4K Single Memory Unit
MM11-FP	- Single Parity Memory Unit
MM11-FX	- Interleaved Memory (jumpers)

MM11-E/F FIELD CODED ECO'S

G102	B2, B3, C4, B6
G103	C2, C4, C5, C7
G225	C3, C7
G226	C4
M729	B2, C3 & A & B
M1091	C1
M7290	C2, C3
MM11-E	C15, C16, C17, C20, D22, B24
MM11-F	D1, C3

MM11-E/F ECO PARTS

<u>NAME</u>	<u>ECO#</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G102	#2	1	19-09849	I.C.
	#3	8	13-03064	Resistor
	#4	4	10-00027	Capacitor
		4	13-09995-0	Resistor
		1	16-09996-0	Indicator
	#6	4	10-00018	Capacitor
G103	#2	3	19-09057	I.C.
	#4	1	13-05631	Resistor
	#5	2	13-02602	Resistor
		2	13-09994-0	Resistor
		1	13-00295	Resistor
		2	10-00027	Capacitor
		1	11-09991	Diode
		1	11-09990	Diode
		1	16-09996-0	Conductor
		1	12-10001-0	Heat sink
	#7	1	10-10274	Capacitor
G225	#3	1	13-00417	Resistor
	#7	4	90-08493	Washers
A/R			90-08268	Thermal compound
G226	#4	1	10-10274	Capacitor
M792	#3	1	19-05547	I.C.
M1091	#1	1	M1091 etch "B"	if applicable module
MM11-F	#1	1	74-08490	Memory shield
MM11-E	#2	1	74-08490	Memory shield

MM11-E		MEMORY		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED		
00002	01/70		A		Jumper D01-B1 to E01-E1				NIL						
00003	01/70				Black wire of twisted pair from C02-C2 to E03-C2				NIL						
00006	02/70		B		Jumper A01-S2 to A04-S2				NIL						
C 00015	09/70		C		<u>NOTE:</u> 1) Rework multiple box systems only 2) Must have ECO 5408475-00006 and M930-00001 Jumper A03-S2 to B04-F2				NIL						
C 00016	12/70			1.5	Blue jumper from E01-C1 to E01-E2 looping through logic				NIL						
C 00017	01/71		D		Jumper B04-F1 to A03-R2				NIL						
C 00020	03/71				<u>NOTE:</u> F/S information regarding strobe and threshold level settings				NIL						
D 00022	04/71			1.0	A module protection plate along MM11-E memory bank			1	74-08490						
B 00024	06/72		E	1.0	<u>NOTE:</u> Must have ECO M729 #3 Black wire of twisted pair from E01-C2 to F01-C2.				NIL						

MM11-E		MEMORY		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED		
00025	05/76				NOTE: Documentation change				NIL						

MM11-F 4K 16 BIT MEMORY		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA
D 00001	3/72			1.0	A module protection plate along each MM11-F bank.		1	74-08490					
00002	5/72				<u>NOTE:</u> Print update of test procedure			Nil					
C 00003	8/72		A	1.0	<u>NOTE:</u> Must have ECO M7290-C0003 Red jumper C01-C2 to E01-T1			Nil					

102 SENSE INHIBIT CARD				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	3/70		C		NOTE: Documentation change				Nil						
00002	3/70	B	D		E5 is a DEC I.C. 74H01-1 E5 is the 1st I.C. from AS1			1	19-09849						
00003	4/70	B	D		NOTE: Supplement to ECO # 2 R4 is a 75 ohm 1/8W resistor R4 is the 1st resistor from AA1			8	13-03064						
00004	6/70	C	D	.5	R2 is a 56 ohm 1/2W 5% resistor R2 is the 1st resistor above E2 E2 is a DEC transformer			4 4 1	10-00027- 13-09995-0 16-09996-0						
00005	6/71		D		NOTE: See ECO # B6				Nil						
00006	4/71	D	D	.25	C3 is a 120 MMF 5% capacitor C3 is the closest capacitor from AA1			4	10-00018						

G103 MEMORY LEVELS & GATES				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA	
00001	1/70	A	A		<u>NOTE:</u> Print update				N/A						
C 00002	3/70	B	A	.5	E2 is a I.C. DEC 74H10 E2 is the 1st i.c. from AH1			3	19-09057						
00003	3/70		A		<u>NOTE:</u> Print update				Nil						
C 00004	4/70	C	A	.25	R17 is a 500 ohm trim pot R17 is located in bottom left corner			1	13-05631						
C 00005	6/70	D	A	1.0	R1, R2 are 56 ohm, 1/4W, 5% resistors R1 & R2 are the two resistors just right of R4 R4 is the 10W resistor nearest the top right corner			2 2 1 2 1 1 1 1	13-02602 13-09994-0 13-00295 10-00027 11-09991 11-09990 16-09996-0 12-100001-0						
00006	2/71	E	A		<u>NOTE:</u> Print change				Nil						
C 00007	1/72	F	A	.25	C11 is a .22 mfd 50V capacitor C11 is the only capacitor left of the two transistors at AC1			1	10-10274						

G225 X - Y CURRENT GENERATOR				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA	
C 00003	7/70	B	B	1.0	R22 is a 2.2K 1/4W 5% resistor R22 is the 3rd resistor from bottom left corner			1	13-00417						
00004	7/70	C	C		R5 is a 680 ohm 1/4W 5% resistor R5 is the 1st resistor from AA1			4	12-02313						
								4	13-00347						
								4	13-00394						
00005	8/70	C			<u>NOTE:</u> Print change				Nil						
00006	9/70	D	D		<u>NOTE:</u> New etch rev				Nil						
C 00007	5/71	E	D	1.0	<u>NOTE:</u> Rework only "D" etch boards Insulating washers on all four heat sinks are tight and can not be rotated.			4	90-08493 90-08268 (thermal compound)						

G226 X - Y DECODER SWITCH				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED		
00001	11/69	A	C		C22 is a .1ufd 50V capacitor C22 is below the two 1/2W resistors on board which are separated by a capacitor				N/A						
00002	3/70	B	C		NOTE: Documentation				Nil						
00003	3/70	C	C		Resistor closest to the bottom left corner is a 120 ohm 1/2W 5% resistor				N/A						
C 00004	11/71	D	D		C22 is a .22 ufd 50V capacitor C22 is below the two 1/2W resistors on board which are separated by a capacitor			1	10-10274						

M109		DEVICE SELECT		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA	
NONE					NOTE: NO ECO's										

M729		MM11-E Control Logic		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA	
00001	03/70	A	B		NOTE: 1) New etch rev 2) Rework Etch "A" Revs E5 is aDEC I.C. 74 H 74				N/A						
B 00002	01/71	B	C	1.0	NOTE: 1) Must be installed in interleaved memories and optional for non-interleaved memory 2) Rework etch "B" rev only (ECO #3 has better rework instructions) No capacitor between the 270 OHM and 390 OHM resistors located near the upper left hand corner				NIL						
C 00003 &A &B	06/72 01/73	C	C	1.5	NOTE: ECO# 3 contains ECO #2 & #3 rework instructions for all etch revs Measure an open CKT from E04-09 to E09-01 E09 is the 4th I.C. from AK1			1	19-05547	DZQGQ DZQCA DZQKB					

M1091 DEVICE SELECT					ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE
																1 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO				QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED		
C 00001	3/71	*	A	N/A	NOTE: MM11-E systems M1091 module if 16K of memory or more				1	M1091 etch "B" (if applicable)						
00002	3/71	A	B		NOTE: MM11-E, MM11-F and MMR11-E memory systems phase in M1091 modules. Check for M1091 module				1	M1091 Etch "B"						

M7290 CONTROL AND LOGIC				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	C	
00001	2/71	C	D		Jumper E06-06 to E31-10 feed through E6 is the 3rd I.C. from AL1 E31 is the last I.C. on board				Nil						
C 00002	9/71	D	E D C	2.0	NOTE: Rework "C" & "D" etch boards Jumper E03-03 to T07-10 feed through				Nil						
C 00003	8/72	E	F E D C	4.0	NOTE: 1) Must have ECO MM11-F-C0003 2) Rework all previous etch boards Jumper E02-08 to AC1				Nil	DZMMA thru DZMMI					


FCCO'S

DWG LOC.
B-6

B-4


M920
B01

M920
B04

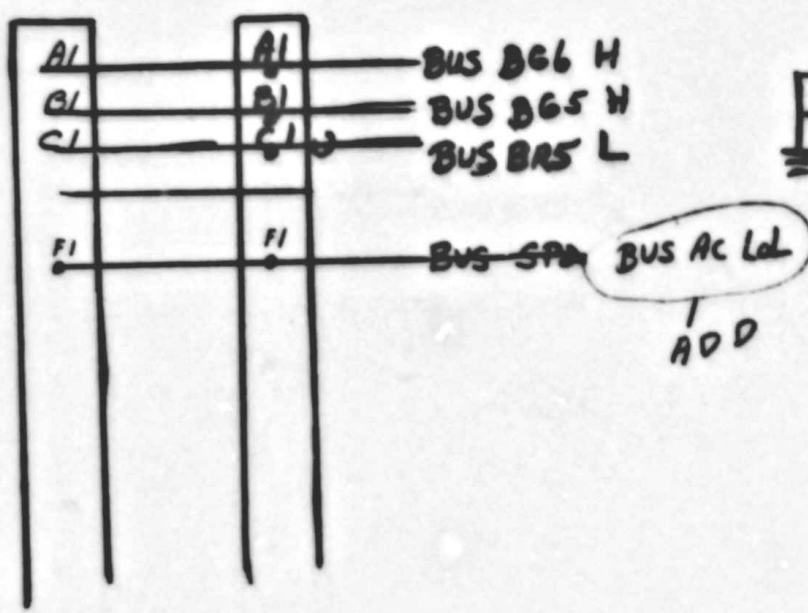

M920
B01

M920
B04

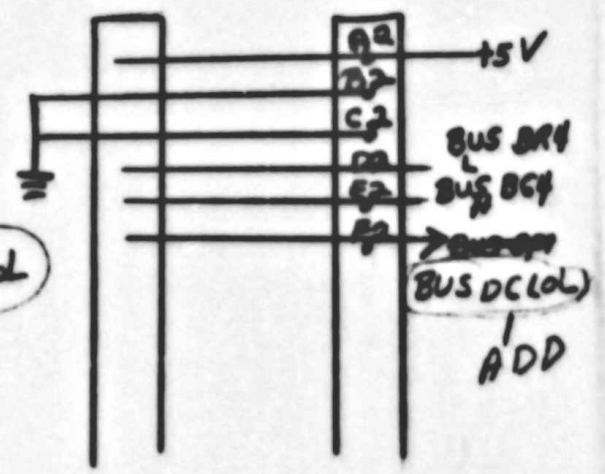

ECO # MM11E-00015

D-1C-MM11-E-09

NEW
REV.
A


DWG NO	REV LET	NO OF SHEETS	TITLE
D-IC-MM11-E-09	A	1	I/O CONNECTORS
K-WL-M11-E-07	BC	1	WIRE LIST

ECO # MM11E-00015

A-ML-MM11E

NEW
REV.
P

DWG LOC.
D-4

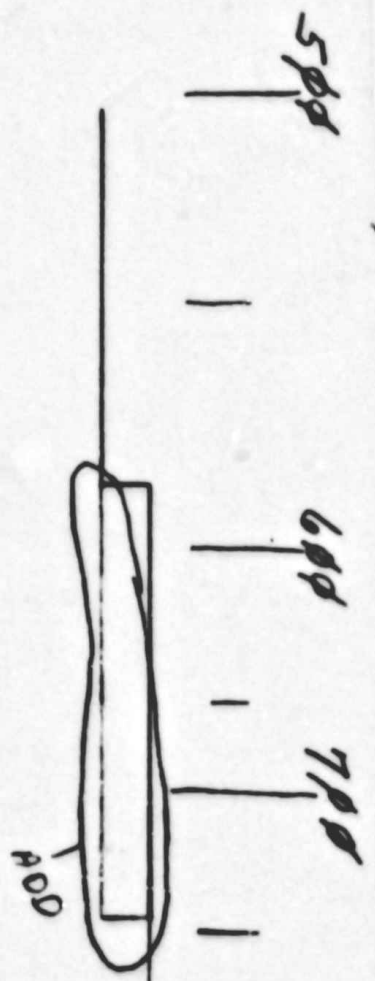


CHECK RAKE & BUD

NEW REV
D


C-4+3



B-5

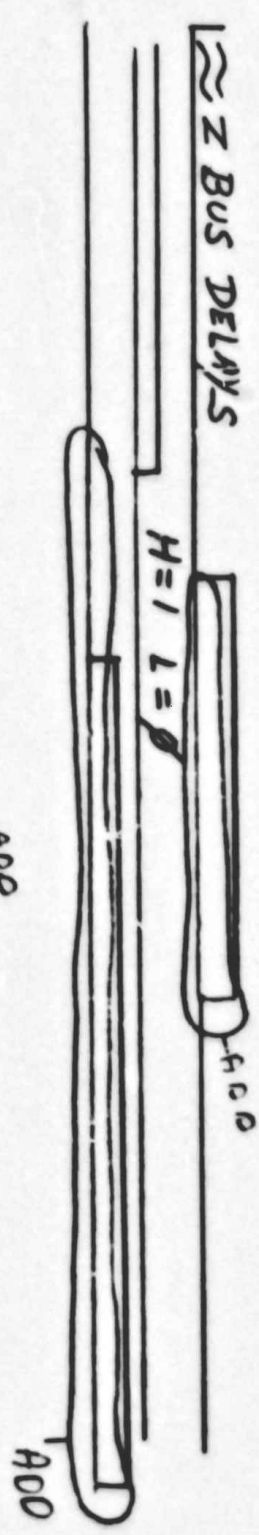

B-5+6

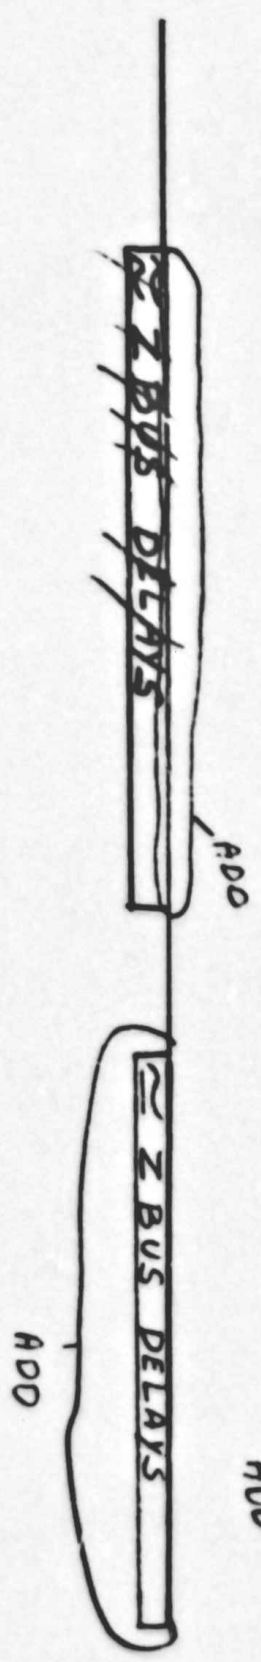


ECO # MM11E-00016

D-TD-MM11E-08

1
2
3
4

LENGTH SHOULD BE A MAXIMUM OF
 $2\frac{1}{4}$ INCHES. CHECK DRAWING FOR
 LENGTH AND FOR HOW LOOPS SHOULD
 BE DRESSED INTO LOGIC.

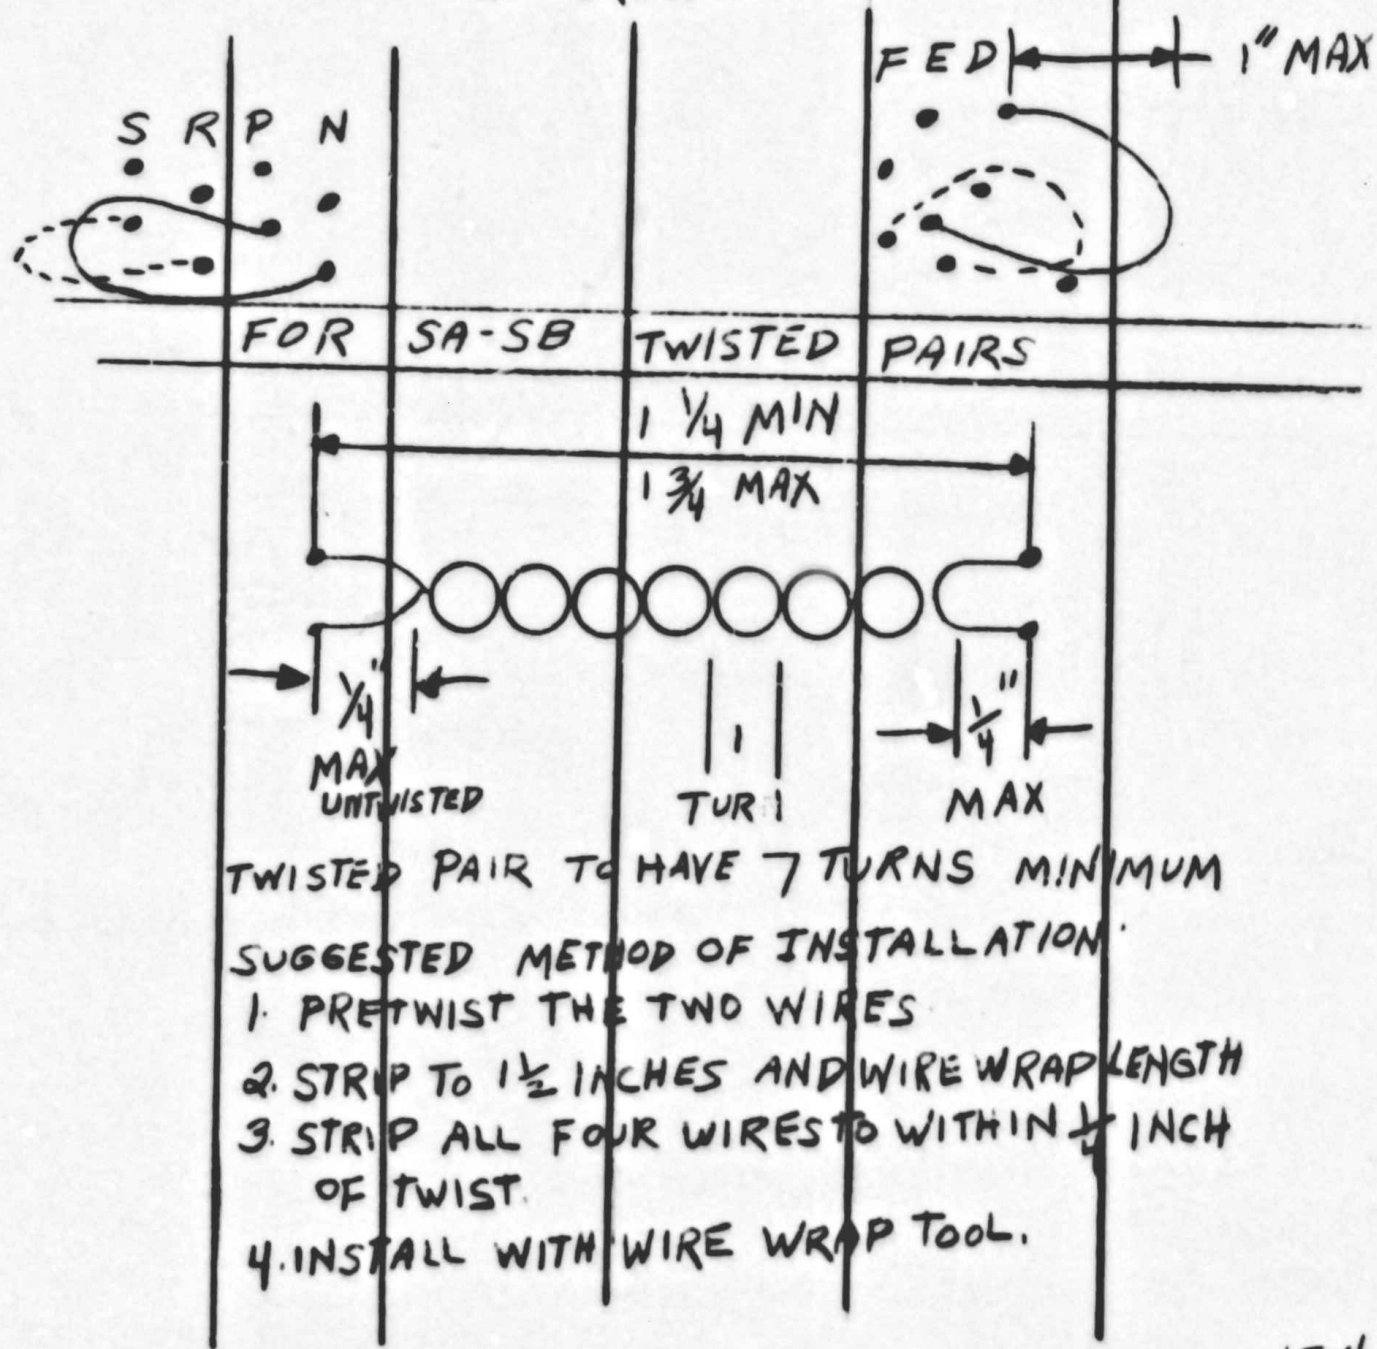

ECO# MM11E-00016 D-AD-7006468-0-0

NEW
 REV
 C

DWG NO.	REV LET
D-AD-7006468-0-0	BC
A-PL-7006468-0-0	BC
D-TD-MM11E-08	AB

ECO# MM11E-00016

A-ML-MM11E

NEW
REV.
N



ENGINEERING CHANGE ORDER

ECO NO.
MM11E-00017
Sheet 1 of 4

ORIGINATOR RICHARD MANION	RECEIVED CHG. DATE 12/22/70	ISSUED ECO DATE 1-22-71	FINAL RELEASE DATE	DISCRETE PROJECT NUMBER 11 07602
DATE 12/15/70	EXT. 2005			

EQUIPMENT AFFECTED

TYPE CHANGE	UNIT TO BE CHANGED	CHECKLIST	YES	NO
ELECTRICAL <input checked="" type="checkbox"/>	MM11-E	SHOP MODEL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MECHANICAL <input type="checkbox"/>	PRODUCT LINES	SYSTEMS PROGRAMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MODULE <input type="checkbox"/>		DIAGNOSTICS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SUBASSEMBLY <input type="checkbox"/>	PDP11	TECHNICAL PUB.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MFG/FIELD PROCEDURE <input type="checkbox"/>		TEST PROGRAMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
TEST INFORMATION		TESTER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERIAL #		MFG/FIELD PROCEDURE	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BY		PACKAGING INSTRUCTIONS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		TOOLING	<input type="checkbox"/>	<input checked="" type="checkbox"/>

BREAK IN POINT				SIGNIFICANCE	
SYSTEM	MODULE/OPTION	FIELD	REWORK	CODE	
	MM11-E	DISTRIBUTED FOR FIELD SERVICE INFORMATI.J ONLY		05	REQ. TO MEET SPECIFICATION <input type="checkbox"/>
					PROD. IMPROVEMENT <input checked="" type="checkbox"/>
					CUSTOMER/FIELD REQ. <input type="checkbox"/>
					FACILITATE MFG. <input type="checkbox"/>
					DRAWING CORRECTION <input checked="" type="checkbox"/>
					VENDOR <input type="checkbox"/>

PROBLEM

1. WANTED TO IMPROVE MEMORY PERFORMANCE. STROBE 210 NS WAS TOO EARLY FOR OPTIMUM PERFORMANCE . SOME TIMES CURRENT WAS TOO HIGH FOR OPTIMUM PERFORMANCE WHEN ADJUSTING THE REFERENCE VOLTAGE.
2. WIRE LIST WAS NOT CHANGED ACCORDING TO ECO # MM11E-00015.
- 3 BLOCK SCHEMATIC DOES NOT REFLECT CHANGES OF M729 CIRCUIT SCHEMATIC
4. TIMING AND FLOW DIAGRAM NEEDS TO BE UPDATED.
5. WRITING IN MARGIN

CORRECTION

1. CHANGED TEST PROCEDURE TO IMPROVE MEMORY PERFORMANCE.
2. CORRECT WIRE LIST ACCORDING TO SUBMITTED ADD/DELETE SHEET.
3. UPDATE BLOCK SCHEMATIC PER ATTACHED MARKED UP PRINT.
4. UPDATE TIMING AND FLOW DIAGRAM AS INDICATED .
5. REMOVE WRITING FROM MARGIN.

APPROVAL

DESIGN ENGINEER <u>P. DURANT</u>	ENG. MGR. _____
PRODUCTION ENGINEER <u>D. CALL</u>	FIELD SERVICE (ADVISORY) <u>J. BUZYNSKI</u>
CHIEF ENGINEER _____	

digital**ENGINEERING CHANGE ORDER
DOCUMENT & MATERIAL
CHANGE**ECO NO.
MM11E-00017
Sheet 2 of 4


ITEM	DOCUMENT/OR PART NUMBER	OLD REV	NEW REV	(PART NAME) DESCRIPTION OF CHANGE	DISP CODE
1	A-ML-MM11-E	P	R	(MASTER LIST) UPDATE REVISION LEVEL ON THE FOLLOWING DRAWINGS: D-BS-MM11-E-05 FROM A TO B K-WL-MM11-E-07 FROM C TO D D-TD-MM11-E-08 FROM B TO C A-SP-MM11-E-11 FROM O TO A	06
2	D-BS-MM11-E-05	A	B	(BLOCK SCHEMATIC) SEE MARKED PRINT THIS ECO.	06
3	K-WL-MM11-E-07	C	D	(WIRE LIST) SEE ADD/DELETE SHEET THIS ECO.	06
4	D-TD-MM11-E-08	B	C	(TIMING DIAGRAM) DELETE CHECK RACE COND. IN MARGIN. INCREASE TIME AND FLOW IN DISZ BEFORE 650NS. INCREASE TIME AND FLOW IN CINZ BEFORE 350 NS.	06
5	A-SP-MM11-E-11	-	A	(ENGINEERING SPECIFICATION) DELETE FROM PARA. 11.0 210 NS . ADD 220NS. ADD TO PARA. 13.4- IF THE MARGIN IS GREATER THAN 1.0V SET VXY AT 0.5 BELOW THE FAILING HIGH END POINT. (EXAMPLE IF MARGINS ARE 0.4 TO 1.8V, SET AT 1.3V= 1.8-0.5)	06

DISPOSITION CODES

Use up Present Stock	01	Retrofit to Break-in	05
Use Present Stock until New Stock Available	02	Documentation Change Only	06
Rework all Material	03	New Item Purchase	07
Rework until New Stock Available	04	New Item in Stock	08
		New Item on Order	09
		Retain	00

DRA 112A

SEE REVERSE SIDE FOR INSTRUCTIONS

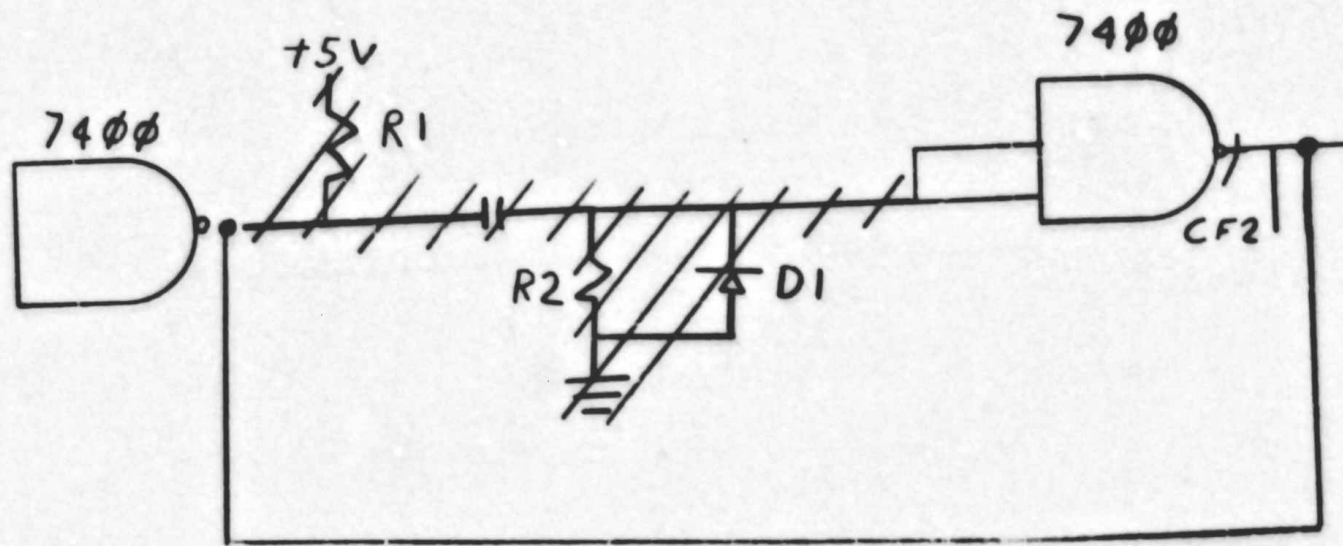

ECO# MM11E-00017

0-BS-MM11-E-05

NEW
REVB

digital

ENGINEERING CHANGE ORDER

ECO NO.
MM11E-00020
Sheet 1 of 3

W.O. 362E CS DM

ORIGINATOR RICHARD MANION	RECEIVED CHG. DATE 3/24/71	ISSUED ECO DATE 3-26-71	FINAL RELEASE DATE 4-13-71	DISCRETE PROJECT NUMBER 11 07602
DATE 3/9/71	EXT. 2005			

EQUIPMENT AFFECTED

TYPE CHANGE	UNIT TO BE CHANGED	CHECKLIST	YES	NO
ELECTRICAL <input checked="" type="checkbox"/>	MM11E	SHOP MODEL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MECHANICAL <input type="checkbox"/>	PRODUCT LINES	SYSTEMS PROGRAMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MODULE <input type="checkbox"/>		DIAGNOSTICS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SUBASSEMBLY <input type="checkbox"/>	PDP11	TECHNICAL PUB.	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MFG/FIELD PROCEDURE <input type="checkbox"/>		TEST PROGRAMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
TEST INFORMATION		TESTER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERIAL #		MFG/FIELD PROCEDURE	<input checked="" type="checkbox"/>	<input type="checkbox"/>
BY		PACKAGING INSTRUCTIONS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		TOOLING	<input type="checkbox"/>	<input checked="" type="checkbox"/>

BREAK IN POINT				SIGNIFICANCE	
SYSTEM	MODULE/OPTION	FIELD	RETROFIT	REWORK	CODE
FIELD SERVICE CODE F	MM11E	DISTRIBUTED FOR FIELD SERVICE INFORMATION ONLY			06
				REQ. TO MEET SPECIFICATION	<input type="checkbox"/>
				PROD. IMPROVEMENT	<input checked="" type="checkbox"/>
				CUSTOMER/FIELD REQ.	<input type="checkbox"/>
				FACILITATE MFG.	<input type="checkbox"/>
				DRAWING CORRECTION	<input checked="" type="checkbox"/>
				VENDOR	<input type="checkbox"/>

PROBLEM

1) WANTED TO IMPROVE MEMORY PERFORMANCE. STROBE AT 220 NS AS SUGGESTED IN ECO MM11E-00017 WAS TOO LATE FOR OPTIMUM PERFORMANCE

2) PAR 12.0 MM11E TEST PROCEDURE INCORRECT. V THRESHOLD SET TO -5.3V IS TOO LOW.

CORRECTION

1) CHANGE STROBE SETTING AS STATED IN PARAGRAPH 11.0 FROM 220 NS TO 210 NS

2) CHANGE TEST PROCEDURE . SET V THRESHOLD AT -5.2V

NOTE: REF. ECO MM11E-00017 PROBLEM 1. IF THE CORRECTION FOR PROBLEM (1) IN ECO MM11E-00017 WAS NOT PERFORMED IT WILL NOT BE NECESSARY TO IMPLEMENT CORRECTION (1) OF THIS ECO.

APPROVAL

DESIGN ENGINEER P. DURANT 3/2/71 ENG. MGR. _____

PRODUCTION ENGINEER DON CALL 3/3/71 FIELD SERVICE (ADVISORY) J. BUZYNSKI

CHIEF ENGINEER _____

DRA 111A

SEE REVERSE SIDE FOR INSTRUCTIONS

digital**ENGINEERING CHANGE ORDER
DOCUMENT & MATERIAL
CHANGE**ECO NO.
MM11E-00020
Sheet 2 of 3

ITEM	DOCUMENT/OR PART NUMBER	OLD REV	NEW REV	(PART NAME) DESCRIPTION OF CH/NGE	DISP CODE
1	A-ML-MM11-E	T	U	(MASTER LIST) UPDATE REVISION LEVEL OF ITEM 3 THIS ECO	06
2	A-ML-MM11-EX	-	A	(MASTER LIST) SAME CHANGE AS ITEM 1 THIS ECO	06
3	A-SP-MM11E-11	A	B	(TEST PROCEDURE) SHEET 4 OF 5: DELETE 220 NS IN PARAGRAPH 11.0 ADD 210 NS DELETE -5.3V IN PARAGRAPH 12.0 ADD -5.2V UPDATE REVISION LEVEL ON ALL SHEETS	06

DISPOSITION CODES

Use up Present Stock
Use Present Stock until New
Stock Available
Rework all Material
Rework until New Stock
Available

01
02
03
04

Retrofit to Break-in
Documentation Change Only
New Item Purchase
New Item in Stock
New Item on Order
Retain

05
06
07
08
09
00

DRA 112A

SEE REVERSE SIDE FOR INSTRUCTIONS

FIELD SERVICE NOTES:

ECO MM11E-00020

Page 3 of 3

C LEVEL OF URGENCY code

The ECO number will be posted to the EDP file with this LOU code replacing the lead ϕ - "A"= Mandatory, High Priority
"B"= Mandatory "C"= Applicable if symptoms are present
"D"= Low Priority "D"= Product Improvement, Optional

Yes This ECO is NO CHARGE TO CUSTOMER - All DEC installation labor and materials are to be reported under a "W" charge code.

No This ECO is STANDARD APPLICABILITY - It is to be installed at no charge for warranty and maintenance contract customers in accordance with the technical effectivity, otherwise at customer expense.
Charges - Documentation \$ N/C, Parts \$ NONE,
DEC on-site labor \$ N/C. (minimum per call billing applies)
(* parts prices not available at the time of Speco release)

F FIELD DISTRIBUTION CODE

"F"= Immediate Speco distribution to all field offices
"DF"= No general Speco distribution, only to offices where equipment is located (less than 25 units in the field)

No UNCONDITIONAL ECO - General distribution kits will include Field Installation Orders, Specos, Prints, and Parts.

Yes CONDITIONAL ECO - General distribution will include Field Installation Orders only. Prints and parts must be ordered from FSIC as required.

No Parts availability delay expected _____.

Yes The REQUIREMENT TO MEET SPECIFICATION is applicable retroactively to equipment in the field.

NOTE:



ENGINEERING
CHANGE ORDER 8523

ORIGINATOR Richard Manion 5-2
TEL EXT 2005 DATE 3/13/72
DISC PROJ NO. 11 07602
COST CENTER NO. 392 A.F.

ECO NO. MM11E-00022
SHEET 1 OF 3
DATE RECEIVED 3-16-72
FIRST ISSUE 3-20-72
FINAL ISSUE

PROBLEM
Under some conditions when other options are placed along side an MM11/E they fail to operate correctly.

UNIT TO BE CHANGED

MM11/E
Memory

DISP CODE *

OPTIONS AFFECTED

MM11/E

CORRECTION
Install a module protection plate.

BREAK-IN/EFFECTIVITY
*Install module protection plate only when problems occur.

PRODUCT LINES
AFFECTED

PDP11/20

ITEM NO.	DOCUMENT/PART NO.	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE	DOCUMENTATION AFFECTED	FIELD SERVICE AFFECTED	TYPE OF CHANGE
1.	C-DI-MM11-E-01	D	E	06	(Drawing Index Memory) Change per this ECO.	<input type="checkbox"/> MODEL <input type="checkbox"/> DIAGNOSTICS <input type="checkbox"/> TECH MANUAL <input type="checkbox"/> TESTER <input type="checkbox"/> TEST PROG <input type="checkbox"/> TOOLING <input type="checkbox"/> PKG INST <input type="checkbox"/> ENG SPEC <input type="checkbox"/> PURCH SPEC	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> Customer Charge <input checked="" type="checkbox"/> Product Line Charge	<input type="checkbox"/> ELECTRICAL <input checked="" type="checkbox"/> MECHANICAL <input type="checkbox"/> MODULE
2.	7408490	-	-	07	(Module Protection Plate) Add quantity of 1 to drawing index.			ORDER PR MODEL <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
3.	A-ML-MM11-E	V	W	06	Update per item 1.			

DISPOSITION CODES

APPROVAL SIGNATURES

00 - RETURN TO STOCK
01 - (DELETED)
02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
03 - REWORK IMMEDIATELY (RETROFIT)
04 - (DELETED)
05 - (DELETED)
06 - DOCUMENT CORRECTION
07 - NEW ITEM (THIS ASSEMBLY)
08 - NEW ITEM (THIS COMPANY)
09 - SCRAP IMMEDIATELY

DESIGN ENGR Pete Durant *Pete Durant*
ENG MGR (OPT)
FIELD SERVICE (OPT)
CHIEF ENGR (MODULES ONLY) *R. D.*



FIELD CHANGE ORDER

FCO MM11E - D 0022
PAGE 2 OF 2

DATA PROCESSING AND DEC ECO LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO.

FIELD EFFECTIVITY

MM11-E Memory Assembly

FIELD RETROFIT IS ANTICIPATED IN 5 % OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER - ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE.

STANDARD APPLICABILITY - THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE, OTHERWISE AT CUSTOMER EXPENSE.

DOCUMENTATION \$ _____ PARTS \$ _____ DEC ON-SITE LABOR \$ _____

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.

FIELD OFFICE FCO DISTRIBUTION CODE

F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES
 DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED.

FCO KIT DISTRIBUTION

FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE.

~~FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE.~~ KITS, AS DEFINED BELOW, MAY BE ORDERED AS REQUIRED.

CONTENTS OF AN FSIC INITIATED KIT

FID	FCO	PRINTS	PARTS

FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES:

CONTENTS OF A FIELD ORDERED KIT

FID	FCO	PRINTS	PARTS
	X	X	X

D	H	K	W
---	---	---	---

PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN. FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST.

INSTALLATION AND TEST PROCEDURES

- Carefully install module protection plate per FCO instructions. This requires insertion of the plate under existing wire runs which are easily broken.
- Run maindecs or other programs whose failure indicated the need for this FCO to be implemented. They should now function correctly.

LEVEL OF URGENCY CODE

- A MANDATORY - HIGH PRIORITY
- B MANDATORY
- C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- E PRODUCT IMPROVEMENT - OPTIONAL - LOW PRIORITY

DISCRETE PROJECT NUMBER (FOR FIELD SERVICE REPORTING)

AVAILABILITY DELAY: PARTS None NO PARTS

ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING: 1.0 HOURS

SPECIAL TEST EQUIPMENT, TOOLS, OR SUPPLIES

LAST PREVIOUS FCO'S: C020, C016, 015

RELATED OR PRE-REQUISITE FCO'S

- MAINDEC CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

VERIFICATION MAINDECS

PARTS REQUIRED

Q1 74-08490 Module Protection Plate

NOTES

FIELD SERVICE APPROVAL

Charles Dewey


CDK


3/20 3/24 (0) 3/24 75

ECO MM11E-00022
MM11F REWORK SHEET

SHEET 2 OF 2

1. LOOSEN 2 SCREWS AT POINTS A, CARE SHOULD BE USED AT ALL TIME SO, THAT NO WIRES WILL BE DAMAGED.
2. SLIDE THE FINGERS OF THE MODULE PROTECTION PLATE UNDER THE GND LUGS. THE PROTECTION PLATE SHOULD BE RIGHT AGAINST THE WIRED ASSY. FRAME, POINTS B.
3. TIGHTEN SCREWS.

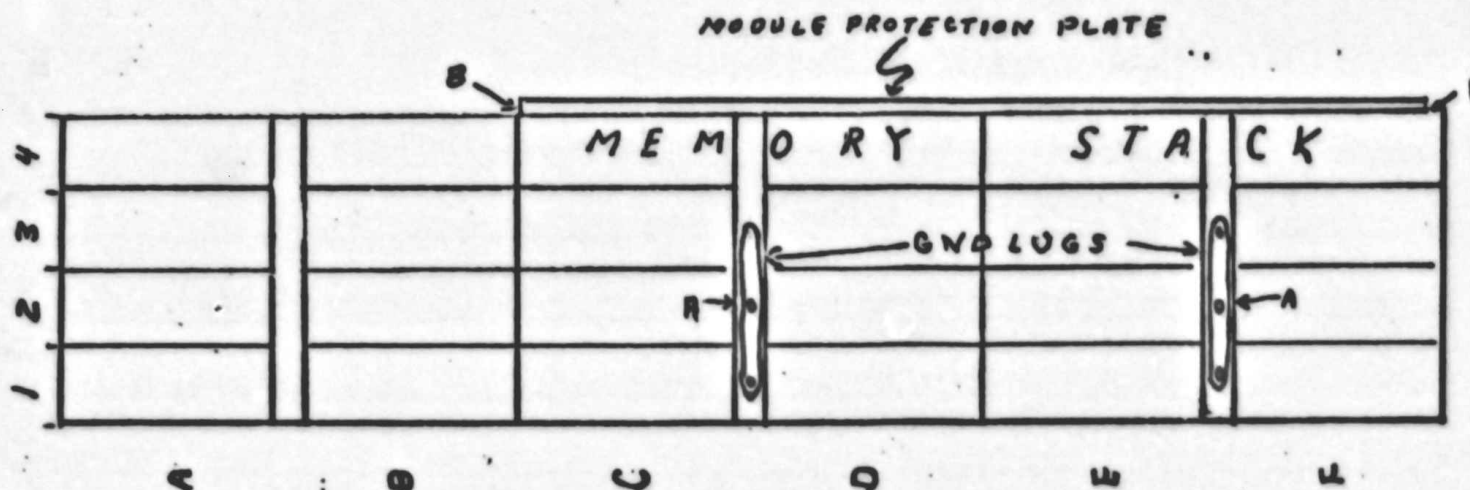

 ENGINEERING CHANGE ORDER	TITLE	DWG NO.	NEW
	JEN ALYCE FURTADO		
	CHK'D <i>Cuth...</i>	DWG LOC.	GRAPHIC DESCRIPTION

digitalENGINEERING **435E**
CHANGE ORDERORIGINATOR R. Manion 1-3
TEL EXT 2005 DATE 5-6-72
DISC PROJ NO. D-96-6122
COST CENTER NO. 392 **A.F.**ECO NO. **MM11-00024**
SHEET **1** OF **6**
DATE RECEIVED **5-9-72**
FIRST ISSUE **5-10-72**
FINAL ISSUE **6-24-72****PROBLEM**
1. STROBE Signals and TINH have too much noise on them.
2. Read H signal has too many loads on it.UNIT TO BE CHANGED
MM11-E

DISP CODE 03

OPTIONS AFFECTED

MM11-E

CORRECTION

1. Install twisted pairs for these signals.
2. Develop another Read H signal to share the load.

BREAK-IN/EFFECTIVITY All MM11-E's shipped after May 12 will have this ECO.
Rework M729 Module when necessary, all MM11-E's with this
ECO, must have M729's with ECO # 3.PRODUCT LINES
AFFECTEDPDP-11/45
PDP-11/20
PDP-11/45

ITEM NO.	DOCUMENT/PART NO.	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE	DOCUMENTATION AFFECTED	FIELD SERVICE AFFECTED	TYPE OF CHANGE
1	K-WL-MM11-E-07	D	E	06	Wire List Update	<input type="checkbox"/> MODEL	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO	<input checked="" type="checkbox"/> ELECTRICAL
2	D-AD-7006468-0-0	D	E	06	Wire Ass'y MM11-E See final release print.	<input type="checkbox"/> DIAGNOSTICS	<input type="checkbox"/> Customer Charge	<input type="checkbox"/> MECHANICAL
3	D-BS-MM11-E-03	A	B	06	Core Memory stack (2 sheets) See final release print.	<input type="checkbox"/> TECH MANUAL	<input checked="" type="checkbox"/> Product Line Charge	<input type="checkbox"/> MODULE
4	A-AL-MM11-E	Z	AA	06	UPDATE PRINT PER THIS ECO.	<input checked="" type="checkbox"/> TESTER		<input type="checkbox"/> ORDER PR MODEL
5	C-DI-MM11-E-01	E	F	06	UPDATE PRINT PER THIS ECO	<input type="checkbox"/> TEST PROG		<input type="checkbox"/> YES
6	A-PL-7006468-0-0	D	E	06	UPDATE REV PER THIS E.C.O.	<input type="checkbox"/> TOOLING		<input type="checkbox"/> NO
						<input type="checkbox"/> PKG INST		
						<input type="checkbox"/> ENG SPEC		
						<input type="checkbox"/> PURCH SPEC		

DISPOSITION CODES

00 - RETURN TO STOCK
 01 - (DELETED)
 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
 03 - REWORK IMMEDIATELY (RETROFIT)
 04 - (DELETED)
 05 - (DELETED)
 06 - DOCUMENT CORRECTION
 07 - NEW ITEM (THIS ASSEMBLY)
 08 - NEW ITEM (THIS COMPANY)
 09 - SCRAP IMMEDIATELY

APPROVAL SIGNATURES

DESIGN ENGR Pete Durant *[Handwritten Signature]*
 ENG MGR (OPT) _____
 FIELD SERVICE (OPT) _____
 CHIEF ENGR (MODULES ONLY) _____

digital

FIELD CHANGE ORDER

4835

FCO MM1E - B 0024
PAGE ___ OF ___

DATA PROCESSING AND DEC-ECO-LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO.

FIELD EFFECTIVITY
Retrofit all MM11-E's

- * LEVEL OF URGENCY CODE
- A MANDATORY - HIGH PRIORITY
 - B MANDATORY
 - C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
 - D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
 - E PRODUCT IMPROVEMENT - OPTIONAL - LOW PRIORITY

FIELD RETROFIT IS ANTICIPATED IN 100 OF UNITS DEFINED ABOVE

- NO CHARGE TO CUSTOMER - ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE.
- STANDARD APPLICABILITY - THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE. OTHERWISE AT CUSTOMER EXPENSE.
- DOCUMENTATION \$ _____ PARTS \$ _____ DEC ON-SITE LABOR \$ _____
- DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.

DISCRETE PROJECT NUMBER
(FOR FIELD SERVICE REPORTING)

AVAILABILITY DELAY	NO PARTS
PARTS	X

ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING 1.0 HOURS

SPECIAL TEST EQUIPMENT, TOOLS, OR SUPPLIES

- FIELD OFFICE FCO DISTRIBUTION CODE
- F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES
- DE IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED.

LAST PREVIOUS FCO'S D022, C020, C017

- FCO KIT DISTRIBUTION
- FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE
- ~~FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE~~
KITS, AS DEFINED BELOW, MAY BE ORDERED AS REQUIRED.

RELATED OR PREREQUISITE FCO'S
M729-00003

- MAINDEC CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

CONTENTS OF AN FSIC INITIATED KIT

FIO	FCO	PRINTS	PARTS

FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES

CONTENTS OF A FIELD ORDERED KIT

FIO	FCO	PRINTS	PARTS
	X	X	

D	H	K	W
---	---	---	---

- PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN. FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST.

VERIFICATION MAINDEC'S

INSTALLATION AND TEST PROCEDURES

PARTS REQUIRED

NOTES
Necessary to improve reliability on existing units.


FIELD SERVICE APPROVAL
Art King

Art King
5/11 5/17 (1534) 5/17 800

WIRE TABLE

SIGNAL NAME	FROM PIN	TO PIN	COLOR	REMARKS	SIGNALNAME	FROM PIN	TO PIN	COLOR	REMARKS
STROBEN GND	CA1A1	ED2E1	WHT	TWP	TO INH GND	EO1J1	DF2E1	WHT	TWP
	CA1C2	ED3T1	BLK			EO1C2	DF1C2	BLK	
					TI INH GND	EB1H2 EO1C2	FO1E1 FO1C2	WHT BLK	TWP
					STROBEN GND	CO1F1 CO1C2	DO3S1 DO2T1	WHT BLK	TWP

ADD 

 ENGINEERING CHANGE ORDER	TITLE WIRED ASS'Y MM11-E	DWG NO. D-AD-7006101-0	REV E
	DRN <i>Alfon...</i>	CHK'D <i>Cathy</i>	DWG LOC.

MM11-1F

DOLL

MM11F-D0001 CODE: DF ML: A

MAR 72 - PROBLEM Under some conditions, when other options are placed along side an MM11F, they fail to operate correctly

CORRECTION Install a module protection plate

In plant effectivity All MM11F as required

Field effectivity All MM11F as required

Time To Install And Test 1.0 Hours

Kit Contents FCO/Prints And Parts

MM11F-00002 CODE: P ML: B

APR 72 - PROBLEM 1 MM11F Test Procedure needs updating

CORRECTION 1 Update Test Procedure

PROBLEM 2 MM11FX print sets are the same as MM11F

CORRECTION 2 Obsolete old MM11FX Master Drawing list Use New

Master Drawing list format on MM11F, to include MM11FX

In plant effectivity 06 documentation change only

MM11F-C0003 CODE: F ML: D WL: A

MAY 72 - PROBLEM 1 Strobe signals and TINH have too much noise

on them

CORRECTION 1 Install twisted pairs on strobe signals, generate another

TINH signal and install twisted pairs on these signals

PROBLEM 2 READ H signal has too many loads on it

CORRECTION 2 Develop another READ H signal to share the load

CORRECTION 3 Solves memory problems caused by DMA transfers that

memory diagnostics don't show up Also solves slot sensitive G103, G102

problems

In plant effectivity Rework immediately

Field effectivity Retrofit all MM11F

Time To Install And Test 1.0 Hour

Kit Contents FCO/Prints

FCR

MM11-F
4K 16 BIT 22 MIL MEMORY
FCO Cross Reference

**A Chronological Listing of Field Retrofit FCO's Which Must Be
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- | | |
|---|---|
| <p>1 G102-B0002 MAR 70
G102-B0003
QUICK SYNOPSIS
8881 IC's replaced by higher speed 74H011 IC's.
QUICK CHECK
74H011 IC's in place of 8881 IC's.
NEW REVISION
Exchange with CS B or later.</p> <p>2 G103-C0002 MAR 70
QUICK SYNOPSIS
Increases system speed.
QUICK CHECK
7410 IC replaced by 74H10.
NEW REVISION
Rework etch B, C to CS B.</p> <p>3 G103-C0004 APR 70
QUICK SYNOPSIS
Provides new higher value trimpot.
QUICK CHECK
R17 changed from 100 ohm to 500 ohm trimpot.
NEW REVISION
Rework etch B, C to CS C.</p> <p>4 G102-B0004 JUN 70
QUICK SYNOPSIS
Decreases Turn-off time of the 2007 transistors.
QUICK CHECK
C2, C7, C12, C17, changed from 1000mmfd to 820mmfd.
NEW REVISION
Rework etch D to CS D.</p> <p>5 G103-C0005 JUN 70
QUICK SYNOPSIS
Provides increase to -6.84VDC for Sense amplifiers
QUICK CHECK
Heat sink ADD'ed to Q4; C1 and C2 changed from 1000mmfd to 820mmfd.
NEW REVISION
Rework etch D, E to CS D.</p> | <p>6 G225-C0003 JUL 70
QUICK SYNOPSIS
Speeds stabilization of X and Y current generator reference voltage.
QUICK CHECK
R22 changed from 4.7K ohm to 2.2K ohms.
NEW REVISION
Rework etch B to CS B.</p> <p>7 M930-C0001 AUG 70
QUICK SYNOPSIS
Power Fail requires BUS SP1 and BUS SP2 for AC LO and DC LO. (In-plant, new etch B at CS A.)
QUICK CHECK
R57 and R69 are 390 ohms.
NEW REVISION
Exchange with etch B.</p> <p>• 5408475-C0006 OCT 70
QUICK SYNOPSIS
AC LO and DC LO return high after assertion in multiple box systems.
QUICK CHECK
D003 clamping diode from AC LO (anode) and from DC LO to +5V line.
NEW REVISION
Rework etch A, B, C to CS D.</p> <p>8 M729-C0002 JAN 71
QUICK SYNOPSIS
Reduces memory cycle time on systems with 8K interleaved memory. (In-plant, new etch C.)
QUICK CHECK
Wire ADD E9 pin 2 to feed-thru near E5 pin 1.
NEW REVISION
Rework etch B to CS B.</p> |
|---|---|

**MM11-F
4K 16 BIT 22 MIL MEMORY
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- 9 M1091-C0001 MAR 71**
QUICK SYNOPSIS
Provides 1 unit load on BUS in systems with 16K or more memory.
QUICK CHECK
M1091 replaces M109 module.
NEW REVISION
Rework etch B to CS A.
- 10 G102-B0006 APR 71**
QUICK SYNOPSIS
Eliminates MM11-F's noise susceptibility.
QUICK CHECK
C3, C8, C13, C18 changed from 33mmfd to 120mmfd.
NEW REVISION
Rework etch D to CS D.
- 11 G225-C0007 MAY 71**
QUICK SYNOPSIS
Prevent heat sink from shorting to etch.
QUICK CHECK
Insulating washers under heat sinks.
- 12 M7290-C0002 OCT 71**
QUICK SYNOPSIS
Prevents Unibus hang with SSYN asserted from memory. (In-plant, new etch E).
QUICK CHECK
Wire ADD E8 pin 5 to E7 pin 9.
NEW REVISION
Rework etch C to CS D.
- 13 MM11F-D0001 MAR 72**
QUICK SYNOPSIS
Module protection plate prevents MM11-F noise interaction with adjacent modules.
QUICK CHECK
Presence of protection plate.
- 14 MM11F-C0003 MAY 72**
QUICK SYNOPSIS
Reduces noise on TINH and strobe signals.
QUICK CHECK
C01C1 to D02E1/C01C2 to D02C2.
NEW REVISION
Rework to Wire List A.
- 15 M729-C0003 MAY 72**
M729-D0004
QUICK SYNOPSIS
Unibus hangs with SSYN asserted from memory.
QUICK CHECK
Wire ADD E5 pin 6 to E3 pin 1.
NEW REVISION
Rework etch B, C to CS C.
- 16 M7290-C0003 MAY 72**
QUICK SYNOPSIS
Reduced inductance of TINH H etch corrects noise condition. (In-plant, new etch F.)
QUICK CHECK
Wire ADD E11 pin 8 to feed-thru going to AR1.
NEW REVISION
Rework etch C, D to CS E.

FCCO'S



ENGINEERING
CHANGE ORDER *8524*

ORIGINATOR Richard Manion *5-2*
TEL EXT 2005 DATE 3/13/72
DISC PROJ NO. 11 07602
COST CENTER NO. 392

J.S.

ECO NO. *MM11/F-0001*
SHEET *1* OF *3*
DATE RECEIVED *3-16-72*
FIRST ISSUE *3-20-72*
FINAL ISSUE

PROBLEM
Under some conditions when other options are placed along side an MM11/F they fail to operate correctly.

UNIT TO BE CHANGED
MM11/F
Memory
DISP CODE *

CORRECTION
Install a module protection plate.

OPTIONS AFFECTED
MM11/F

BREAK-IN/EFFECTIVITY
*Install module protection plate only when problems occur.

PRODUCT LINES AFFECTED
PDP11/20

ITEM NO.	DOCUMENT/PART NO.	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE
1.	A-PL-MM11-F-0	0	A	06	(Memory Assembly MM11/F) Change per this ECO.
2.	7408490	-	-	07	(Module Protection Plate) Add quantity of 1 to drawing index.
3.	A-ML-MM11-F	0	A	06	Update per item 1.

DOCUMENTATION AFFECTED

MODEL

DIAGNOSTICS

TECH MANUAL

TESTER

TEST PROG

TOOLING

PKG INST

ENG SPEC

PURCH SPEC

FIELD SERVICE AFFECTED

YES NO

Customer Charge

Product Line Charge

TYPE OF CHANGE

ELECTRICAL

MECHANICAL

MODULE

ORDER PR MODEL

YES

NO

- DISPOSITION CODES**
- 00 - RETURN TO STOCK
 - 01 - (DELETED)
 - 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
 - 03 - REWORK IMMEDIATELY (RETROFIT)
 - 04 - (DELETED)
 - 05 - (DELETED)
 - 06 - DOCUMENT CORRECTION
 - 07 - NEW ITEM (THIS ASSEMBLY)
 - 08 - NEW ITEM (THIS COMPANY)
 - 09 - SCRAP IMMEDIATELY

APPROVAL SIGNATURES

Typewritten Hand Signature

DESIGN ENGR *Pete Durant*

ENG MGR (OPT)


FIELD SERVICE (OPT)

CHIEF ENGR (MODULES ONLY) *[Signature]*

ECO MMIF
MMIF REWORK SHEET

SHEET 2 OF 3

1. LOOSEN 2 SCREWS AT POINTS A, CARE SHOULD BE USED AT ALL TIME SO THAT NO WIRES WILL BE DAMAGED.
2. SLIDE THE FINGERS OF THE MODULE PROTECTION PLATE UNDER THE GND LUGS. THE PROTECTION PLATE SHOULD BE RIGHT AGAINST THE WIRED ASSY. FRAME, POINTS B.
3. TIGHTEN SCREWS.

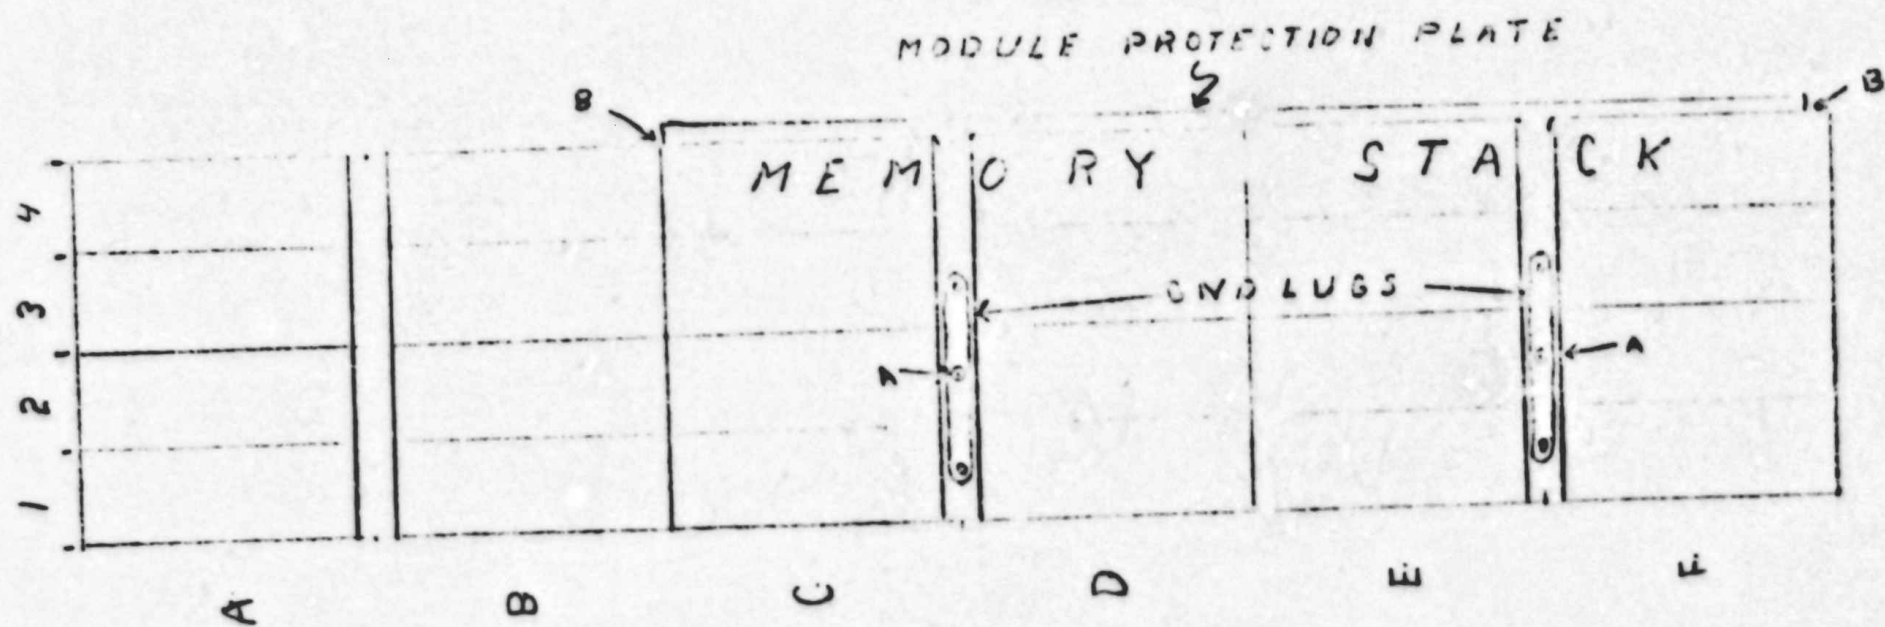



FIELD CHANGE ORDER

FCO MM11F - D 0001PAGE 1 OF 3

DATA PROCESSING AND DEC ECO LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO.

FIELD EFFECTIVITY
MM11-F Memory Assembly

* LEVEL OF URGENCY CODE

- A MANDATORY - HIGH PRIORITY
- B MANDATORY
- C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- E PRODUCT IMPROVEMENT - OPTIONAL - LOW PRIORITY

FIELD RETROFIT IS ANTICIPATED IN 5 % OF UNITS DEFINED ABOVEDISCRETE PROJECT NUMBER
(FOR FIELD SERVICE REPORTING) NO CHARGE TO CUSTOMER - ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE. STANDARD APPLICABILITY - THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE, OTHERWISE AT CUSTOMER EXPENSE.DOCUMENTATION 8 PARTS 8 DEC ON-SITE LABOR 8

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.

AVAILABILITY DELAY
PARTS None NO PARTSESTIMATED DOWN TIME FOR
INSTALLATION AND TESTING 1.0 HOURS

SPECIAL TEST EQUIPMENT, TOOLS, OR SUPPLIES

FIELD OFFICE FCO DISTRIBUTION CODE

 F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED.LAST PREVIOUS FCO'S None

FCO KIT DISTRIBUTION

 FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE. ~~Field Installation Orders (FIOS) will be distributed~~ KITS, AS DEFINED BELOW, MAY BE ORDERED AS REQUIRED.

RELATED OR PREREQUISITE FCO'S

CONTENTS OF AN FSIC INITIATED KIT

FIG	FCO	PRINTS	PARTS

FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES:

CONTENTS OF A FIELD ORDERED KIT

FIG	FCO	PRINTS	PARTS
	X	X	X

D	H	K	W		
---	---	---	---	--	--

 PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN. FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST.

VERIFICATION MAINTENANCE

INSTALLATION AND TEST PROCEDURES

- Carefully install module protection plate per FCO instructions. This requires insertion of the plate under existing wire runs which can be easily broken.
- Run maindecs or other programs whose failure indicated the need for this FCO to be implemented. They should now function correctly.

PARTS REQUIRED
Q1 74-08490 Module Protection Plate

NOTES

FIELD SERVICE APPROVAL
Charles Dewey*CDK*
3/20 3/24 (?) 3/24 75

digitalENGINEERING
CHANGE ORDER ⁺⁸⁶⁴⁸ORIGINATOR Richard Manion
TEL EXT 2005 DATE 5/10/72
DISC PROJ NO. 96 06122
COST CENTER NO. 392ECO NO. MM11F-00003
SHEET 1 OF _____
DATE RECEIVED 5-12-72
FIRST ISSUE 5-15-72
FINAL ISSUE 8-4-72

PROBLEM

1. Strobe signals and TINH have too much noise on them.
2. Read H signal has too many loads on it.
3. Solves memory problems caused by DMA transfers that memory diagnostics don't show up, also, solves slot sensitive G103, G102 problems.

UNIT TO BE CHANGED

MM11/F

DISP CODE 03

OPTIONS AFFECTED

MM11/F

CORRECTION

1. Install twisted pairs on strobe signals, generate another TINH signal and install twisted pairs on these signals.
2. Develop another Read H signal to share the load.

BREAK-IN/EFFECTIVITY

All MM11/F's shipped after May 31 will have this ECO.
Rework M7290 module when necessary, all MM11/F's with this ECO have to have M7290's with ECO #3.

PRODUCT LINES
AFFECTED

PDP11/15

PDP11/20

PDP11/45

ITEM NO.	DOCUMENT/PART NO.	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE	
1	K-WL-MM11-F-07	-	A	06	Update wire list.	DOCUMENTATION AFFECTED <input type="checkbox"/> MODEL <input type="checkbox"/> DIAGNOSTICS <input type="checkbox"/> TECH MANUAL <input type="checkbox"/> TESTER <input type="checkbox"/> TEST PROG <input type="checkbox"/> TOOLING <input type="checkbox"/> PKG INST <input type="checkbox"/> ENG SPEC <input type="checkbox"/> PURCH SPEC FIELD SERVICE AFFECTED <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> Customer Charge <input checked="" type="checkbox"/> Product Line Charge TYPE OF CHANGE <input checked="" type="checkbox"/> ELECTRICAL <input type="checkbox"/> MECHANICAL <input type="checkbox"/> MODULE ORDER PR MODEL <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
2	A-PL-MM11-F-0	A	B	06	Update Rev. per this ECO.	
3	A-ML-MM11-F	C	D	06	Update.	
4	D-AD-7007263-0-0	-	A	06	Wire Ass'y MM11/F. See final release print.	
5	D-BS-MM11-F-03	-	A	06	Core memory stack (2 sheets) See final release print.	
6	A-PL-7007263-0-0	-	A	06	Update revision level.	

DISPOSITION CODES**APPROVAL SIGNATURES**

00 - RETURN TO STOCK
 01 - (DELETED)
 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
 03 - REWORK IMMEDIATELY (RETROFIT)
 04 - (DELETED)
 05 - (DELETED)
 06 - DOCUMENT CORRECTION
 07 - NEW ITEM (THIS ASSEMBLY)
 08 - NEW ITEM (THIS COMPANY)
 09 - SCRAP IMMEDIATELY

DESIGN ENGR Pete Durant *P. Durant*
 ENG MGR (OPT) _____
 FIELD SERVICE (OPT) _____
 CHIEF ENGR (MODULES ONLY) _____

digital
**ENGINEERING CHANGE ORDER
ADD/DELETE SHEET**

 ECO NO.
MM11F-00003
 Sheet ___ of ___

 WIRE LIST NO. **K-WL-MM11-F-07**

 TITLE **MM11/F WIRE LIST** **NEW REV. A**

MAKE ALL DELETIONS FIRST WHEN INSTALLING

SIGNAL NAME	FROM PIN	TO PIN	COMPONENTS	ADD	DEL
TINH H	C01C1	D02E1			X
TINH H	D03E1	E03E1			X
TINH H	E01E1	F01E1			X
STROBE 00 H	C01R1	D02S1			X
STROBE 01 H	C01A1	E01S1			X
TSS H	F01V2	F01P1			X
TINH L	C01K1	F01S1		X	
TINH L	F01S1	F01U2		X	
TINH L	F01U2	F01Y2		X	
TINH 00 H	C01C1	D02E1	WHT	TWP	X
GND	C01C2	D02C2	RED		X
TINH 01 H	F01T2	F01F1	WHT	TWP	X
GND	F01T1	F01C2	RED		X
TINH 01 H	F01T2	E02E1	WHT	TWP	X
GND	F01T1	E02C2	RED		X
STROBE 00 H	C01R1	D02S1	WHT	TWP	X
GND	C01T1	D02T1	RED		X
STROBE 01 H	C01A1	E01S1	WHT	TWP	X
GND	C01C2	E01T1	RED		X

digital

FIELD CHANGE ORDER

4864

FCO MM11F-C 0003

PAGE ___ OF ___

DATA PROCESSING AND DEC-ECO-LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO.

LEVEL OF URGENCY CODE

- A MANDATORY - HIGH PRIORITY
- B MANDATORY
- C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- E PRODUCT IMPROVEMENT - OPTIONAL - LOW PRIORITY

FIELD EFFECTIVITY

Retrofit all MM11-F's

FIELD RETROFIT IS ANTICIPATED IN 100% OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER - ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE.

STANDARD APPLICABILITY - THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE, OTHERWISE AT CUSTOMER EXPENSE.

DOCUMENTATION \$ _____ PARTS \$ _____ DEC ON-SITE LABOR \$ _____

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.

FIELD OFFICE FCO DISTRIBUTION CODE

- F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES
- DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED

FCO KIT DISTRIBUTION

FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE

~~FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES:~~
KITS, AS DEFINED BELOW, MAY BE ORDERED AS REQUIRED.

CONTENTS OF AN FSIC INITIATED KIT

FIG	FCO	PRINTS	PARTS

CONTENTS OF A FIELD ORDERED KIT

FIG	FCO	PRINTS	PARTS
	X	X	

FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES:

D	H	K	W		
---	---	---	---	--	--

PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST.

INSTALLATION AND TEST PROCEDURES

DISCRETE PROJECT NUMBER (FOR FIELD SERVICE REPORTING)

AVAILABILITY DELAY	NO PARTS
PARTS	X

ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING 1.0 HOURS

SPECIAL TEST EQUIPMENT, TOOLS, OR SUPPLIES

LAST PREVIOUS FCO'S D01

RELATED OR PREREQUISITE FCO'S
M7290-00003

- MAINDEC CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

VERIFICATION MAINDECS

PARTS REQUIRED

NOTES


Necessary to improve reliability on existing units.

FIELD SERVICE APPROVAL

Art Zins

RYK

5/16 5/17 (171) 5/18 400

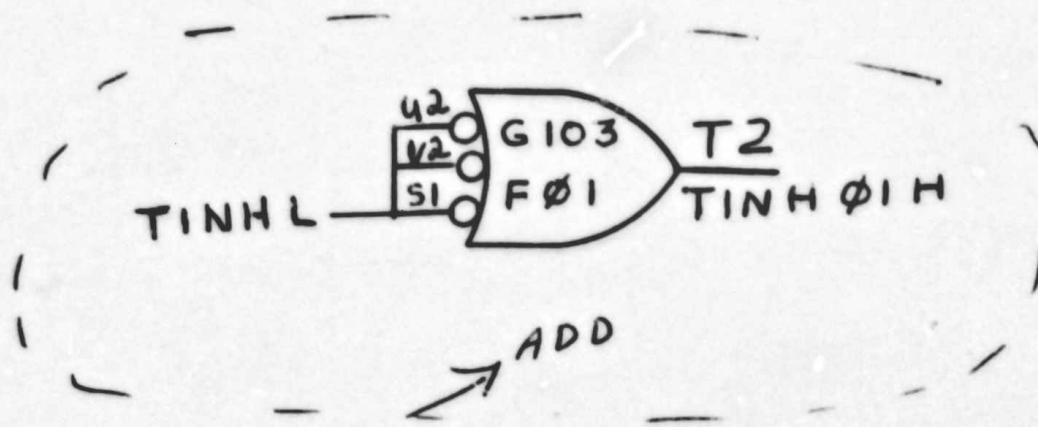

digital

ENGINEERING
CHANGE ORDER

CORE
MEMORY STACK
(X DRIVE)

DATE *Alice Hurst*

REV

ECO NO. D-05-MM11-F-03

B-7

FIG. NO.

GRAPHIC
DESCRIPTION

REV A

WIRE TABLE

SIGNAL NAME	FROM PIN	TO PIN	COLOR	REMARKS	NAME SIGNAL	FROM PIN	TO PIN	COLOR	REMARKS
-15	A03L1	F04B2	↓ BLUE	WIRES MUST PHYSICALLY RUN TO THE RIGHT OF THE BLK AND PINS					
TINH ØØH GND	CØ1C1 CØ1C2	DØ2E1 DØ2C2	WHT BLK	TWP					
TINH ØIH GND	FØ1T2 FØ1T1	FØ1F1 FØ1B2	WHT BLK	TWP	SA18 SA18 INH1B	DØ4V1 DØ4V2 DØ4V2	EØ1D EØ1J2 EØ1J1	WHT BLK YEL	3 TWISTED WIRES
					STROBE EØ GND	CØ1A1 CØ1T1	DØ2S1 DØ2T1	WHT BLK	TWP
					STROBE Ø1 GND	CØ1A1 CØ1C2	EØ1S1 EØ1T1	WHT BLK	TWP
									→ ADD

digital

WIRED ASSY
M M 11-1F

ENG. NO. DAD-707263-0-0 REV A

ENGINEERING
CHANGE ORDER

DATE: *4/20/75*
BY: *WJL*

G. LOC.

GRAPHIC
DESCRIPTION

MM - ML

MM11-L PARTS BREAKDOWN

- G110 - Control and Data Loops
- G231 - Memory Driver
- H214 - 8K 16 Bit Memory Stack
- MM11-L - One 8K 16 Bit Bank of Memory

FCR

ME11-L
MEMORY BOX
FCO Cross Reference

A Chronological Listing of Field Retrofit FCO's Which Must Be
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- 1 5409728-A0003 MAR 72
QUICK SYNOPSIS
Prevents +5V crowbar circuit damage when F1 blows.
QUICK CHECK
R52 changed from 0.2 ohms, 5W to 0.1 ohms, 5W.
NEW REVISION
Rework etch B to CS B1.
- 2 G231-B0001 MAY 72
QUICK SYNOPSIS
Prevents components on G231 shorting to module above it.
QUICK CHECK
Two phenolic 7/16" standoffs on module.
NEW REVISION
Rework etch B to CS C.
- 3 G110-B0005 MAY 72
QUICK SYNOPSIS
Corrects C152 insertion polarity (positive terminal) to +5V.
QUICK CHECK
Positive terminal of C152 tied to +5V.
NEW REVISION
Rework etch C, D to CS E.
- 4 G110-B0004 MAY 72
QUICK SYNOPSIS
Corrects Delay line 3 termination on etch C G110's.
QUICK CHECK
R115 changed from 3K to 1K ohms.
NEW REVISION
Rework etch C to CS D.
- 5 G231-D0003 AUG 72
QUICK SYNOPSIS
Improves -15V and strobe margins when operating at 55°C.
QUICK CHECK
Sixteen D672 diodes replace 330 resistors.
NEW REVISION
Rework etch B to CS E.
- 6 G231-A0005 AUG 72
QUICK SYNOPSIS
Improves DC LO circuitry operation.
QUICK CHECK
Wire ADD from R89 to R93.
NEW REVISION
Rework etch C to CS E1.
- 7 5409728-C0006 SEP 72
QUICK SYNOPSIS
Increases crowbar trip voltage.
QUICK CHECK
Zener changed from 5.6V to 5.7V.
NEW REVISION
Rework etch C to CS C1 and etch D to CS H.
- 8 G110-C0010 NOV 72
QUICK SYNOPSIS
Data errors occur during first DAT1 to any memory bank.
QUICK CHECK
Wire ADD E28 pin 13 to E15 pin 10.
NEW REVISION
Rework etch C, D, E to CS J.
- 9 G231-D0009 DEC 72
QUICK SYNOPSIS
G231 prints redrawn to DEC standards.
NEW REVISION
CS E4.
- 10 G110-D0013 DEC 72
QUICK SYNOPSIS
Ensures PAL and PBL data bits gate high onto the Bus.
QUICK CHECK
Wire ADD's E40 pin 4 to pin 13 and E40 pin 9 to pin 12.
NEW REVISION
Rework etch C to CS E6.

**ME11-L
MEMORY BOX
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- 11** G110-D0012 DEC 72
QUICK SYNOPSIS
Provides print clarification affecting etch C G110's.
NEW REVISION
CS E5.
- 12** G110-C0005 MAR 73
QUICK SYNOPSIS
Allows longer memory cycle time on systems with high speed NPR devices.
QUICK CHECK
DL3 changed from 100 nsec to 125 nsec delay.
NEW REVISION
Rework etch C to CS E7.
- 13** G110-C0016 MAR 73
QUICK SYNOPSIS
Eliminates noise on BUS INIT, etc.
QUICK CHECK
Wire ADD's E4 pin 4 to E7 pin 7; AA1 feed-thru to E7 pin 6.
NEW REVISION
Rework etch C to CS E8.
- 14** 5409728-C0010 MAR 73
QUICK SYNOPSIS
C1 and C2 holder mounting screws loosen.
QUICK CHECK
1/8" spacer between holder and board; adhesive foam on each end of both capacitors.
NEW REVISION
Rework etch C, D, E to CS K.
- 15** G110-B0018 APR 73
QUICK SYNOPSIS
Eliminates noise on STROBE O H etch.
QUICK CHECK
Twisted pair ADD'ed E32 pin 6 of feed-thru to E58 pin 4 feed-thru/E33 pin 7 to ground side of C44.
NEW REVISION
Rework etch C to CS E9.
- 16** 5409728-E0011 JUL 73
QUICK SYNOPSIS
Corrects +5V drift with new current limiter.
QUICK CHECK
R41 changed from .025 ohms to .020 ohms, 7W.
NEW REVISION
Exchange with CS L or later.
- 17** G110-C0019 NOV 73
QUICK SYNOPSIS
Widening R/W RESET L prevents memory skipping a restore cycle.
QUICK CHECK
E28 pin 8 goes to tap 10 of DL.
NEW REVISION
Rework etch C to CS E10.
- 18** 5409728-B0012 DEC 73
QUICK SYNOPSIS
Provides straps to conduct high current and radiate heat at C7 and L1 circuit contact points.
QUICK CHECK
Presence of thermal straps at C7 and L1.
NEW REVISION
Rework etch C to CS C2, etch D to CS H1, etch E to CS M.

**ME11-L
MEMORY BOX
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- 19 5409728-B0017 APR 74**
QUICK SYNOPSIS
C16 overstressed in circuit application.
QUICK CHECK
C16 changed from 100mfd, 20V to 22mfd,
35V.
NEW REVISION
Rework etch C to CS C3, etch D to CS H2,
etch E to CS R.
- 20 5409728-B0019 MAY 74**
QUICK SYNOPSIS
Prevents overtightening of Q7, Q23 hardware.
QUICK CHECK
Mounting hardware changed to 4-40 Kepnuts.
NEW REVISION
Rework etch C to CS C4, etch D to CS H3,
etch E to CS M3, S.
- 21 5409728-B0020 MAY 74**
QUICK SYNOPSIS
5409728 used in H750 requires new thermal
strap. (See FCO 5409728-B0012.)
QUICK CHECK
55-10892 strap replaced with 55-11105
strap.
NEW REVISION
Rework etch C to CS C5, etch D to CS H4,
etch E to CS T.
- 22 5409728-S0022 OCT 75**
5409728-S0023 OCT 75
QUICK SYNOPSIS
Poor performance of germanium transistors in
AC LO and DC LO circuits.
QUICK CHECK
GE transistors replaced by JFET (Q14 and
Q19 are 2N5433). Two small TO18 can type
transistors replaced by TO5 cans.
NEW REVISION
Rework etch C to CS C7, etch D to H6, etch E
to CS M6.

ECO
QUICK
CHECK

NOV./74

MM11-L PARTS BREAKDOWN

G110	- Control and Data Loops
G231	- Memory Driver
H214	- 8K 16 Bit Memory Stack
MM11-L	- One 8K 16 Bit Bank of Memory

MM11-L FIELD CODED ECO'S

G110	B4, B5, C9, C10 & A, D12, D13 & A, C15 & A, C16, B18, C19
G231	B1, D3, A5, D9

March/75

MM11-L ECO PARTS

<u>NAME</u>	<u>ECO #</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G110	#4	1	13-00365	Resistor
	#5	1	10-05306	Capacitor
		4	90-08213	Standoffs
	#9	A/R	17-00024	#10 black/wire ground wire
	#10	1	19-05547	I.C.
	#15	1	16-11327	Delay
	#18	1	10-01610	Capacitor
G231	#1	2	90-06892	Standoffs
	#3	16	11-05275	Diode
	#15	A/R	90-09185	Jumper Wire

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE
													1 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00001	03/72	A	C		R118 is a 220 ohm resistor R118 is left of E28 and right of DL3 or possibly under DL3 E28 is the 6th I.C. from BE1 DL3 is the small delay line right of DL1 DL1 is the biggest delay line			N11					
00002	03/72	B	C		DL3 is a 100n sec. delay line with part number D-10100 and/or 1609559 DL3 is a small delay line just right of DL1-08 DL1 is the biggest delay line on board DL3 CHANGED TO 125 N SEC. (P/N-322-1) AND/OR 1611327 BY ECO #15 +15A			N11					
00003	08/72	C	D		R113 is a 120 ohm 1/2W 5% resistor R113 is located at AS1 below DL2 DL2 is between E1 and E2			N11					
B 00004	08/72	D	C	1.0	NOTE: This ECO affects only "C" etch modules R115 is a 1K 1/2W 5% resistor R115 is the 3rd resistor right of DL1-12 DL1 is the biggest delay line		1	13-00365					
B 00005	08/72	E	C	3.0	NOTE: This ECO affects only "C" etch modules C152 is a 6.8 ufd. capacitor with the cathode connected to the + etch on board. C152 is the capacitor right of DL1 -02 DL1 is the biggest delay line		1 4	10-05306 90-08213	DZMMG DZMMI				

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE		
													2	OF	4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CB NAME		
00006	11/72	F	E		R123 is a 390 ohm 1/4W 5% resistor R123 is the closest resistor to BS1			N11							
00007	09/72	E1	C		4 - Standoffs <u>screwed</u> on			N11							
00008	10/72	E2	C		C47 is a .01 uf 100V 20% disc capacitor C47 is directly below E40 E40 is the 1st I.C. from CT1 DO NOT COUNT PULSE TRANSFORMER AS I.C.			N/A							
C 00009	12/72	E3	C	.5	Four #18 gauge black ground jumpers on SIDE ONE INSTEAD OF ON SIDE # TWO			17-00024 (#18 black & white teflon coated)							
C 00010 & 10A	11/72	E4	C	1.0	Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1		1	19-05547	DZQKB						
00011	12/72				<u>NOTE:</u> This ECO deleted			N/A							
D 00012	12/72	E5	C	N/A	<u>NOTE:</u> Print update affecting only "C" etch modules.			N11							

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CB NAME
D 00013 & 13A	01/73	E6	C	.5	NOTE: Rework only "C" etch modules Jumper pin 4 to 13 on spare I.C. slot above E40 E40 is the 1st I.C. from CT1			N11	DZQMB				
00014	03/73	K	F		NOTE: This ECO affects only CS "F" etch "E" modules Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1			N/A					
00014A	03/73	K	F		NOTE: This ECO affects E & F etch revs modules DL3 is 125 n sec. delay line with P/N 1-322-1 and or 1611327 DL3 is small delay line right of the big delay line			N/A					
C 00015 & 15A	05/73	E7	C	1.0	NOTE: This ECO affects "C" etch rev modules DL3 is 125 n sec. delay line with P/N L-00-01 and/or 1611327 DL3 is small delay line right of the big delay line		1	16-11327	DZMMG DZQKB DZQGA				
C 00016	06/73	E8	C	2.0	NOTE: Rework only "C" etch rev modules Jumper E04-04 to E07-07			N11	DZMMG DZQKB DZQGA				
00017	12/73	L	F		NOTE: This ECO affect only "E" & "F" etch rev modules Jumper E04-04 to E07-07			N11					

CONTROL & DATA LOOP				ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 4 OF 4
G110															
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME			
B 00018	10/73	E9	C	1.0	NOTE: Rework etch "C" Rev White wire of twisted pair from E32-06 feed through to E58-14 E32 is the 4th I.C from BS1 E58 is the 1st I.C from FC1	1	10-01610								
C 00019	12/73	E10	C	1.0	NOTE: Rework "C" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line		NIL	DZQMB							
00020 &A	01/74	M	H		NOTE: Affects "F" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line		N/A								
00021	07/74	N N E11 E11	H F E C		NOTE: Phase in DEC 8640's to replace DEC 380's		N/A								
00022	05/76	P	H		NOTE: DEC 7438 allowable I.C. substitution for 74H01-1 at E5, E18-E22		NIL								

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00001	6/72	C	C	3.0	Two standoffs to prevent shorting			2	90-06892						
00002	8/72	D	D		Four standoffs on module				Nil						
D 00003	8/72	E	D	4.0	NOTE: Rework only "C" etch modules D116 is a D672 diode instead of being a resistor D116 is the only diode right of E1			16	11-05275	DZMMI					
00004 & 4A	8/72	F	E		E2 is a DEC I.C. 1074H00 E2 is the I.C. closest to the top left corner.				Nil						
A 00005	8/72	E1	C	4.0	NOTE: Rework only G231's with etch rev "C" which are in 11/05 and MELL systems. 11/45 memories do <u>not</u> need this ECO Jumper from R101 to Q7 R101 is the 3rd resistor from bottom left corner Q7 is the biggest transistor from E1				Nil						
00006	8/72	E2	C		R170 is a 100 ohm 1/4W 5% resistor R170 is the 2nd resistor from top edge of board in the 1st row of resistors left of E1				Nil						
00007	9/72	E3	C		NOTE: Print update				Nil						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00008	9/72	E1A E2A E3A	C C C		C52 is a 470 pfd 100V 5% capacitor C52 is at the far left of DR1 and the only component between two transistors				Nil						
D 00009	12/12	E4	C	N/A	NOTE: Field service clarification for etch "C" modules				Nil						
00010	3/73	H	E		E1 is a DEC I.C. 4011 quad transistor				N/A						
00011	4/73	E5	C		E1 is a DEC I.C. 4011 quad transistor				N/A						
00012	4/73	J	E		NOTE: Affects etch "E" rev only R176 is a 4.7K 1/4W 5% resistor R176 is the 1st resistor below two transistors at the far left of EJ1				N/A						
00013	11/73	K	E		NOTE: I.C. substitution cancelled by ECO # 16				N/A						
00014	2/74	L	E		Q12 as snap-on heat sink Q12 is closest transistor to bottom left corner.				N/A						
00015	6/74	M	E ALL		NOTE: This ECO affects all etch rev modules. J1 & J2 have insulated jumper wire J1 & J2 are between E31 and E34 E31 is the last I.C. from CD slot				N/A						
00016	/74	N E6	E C		NOTE: I.C. 380 and 7380 are unsuitable E9, E15, E16, E17 are I.C. DEC 8640's E9 is the last I.C. from AV1 E15 is the 1st I.C. from BF1				N/A						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00017	01/75	P	E		Q6 is a DEC 6534C transistor Q6 is the <u>last</u> transistor from EJ1				N/A						
00018	04/75	R	E		<u>NOTE:</u> Phase in jumper wire For current loops useing teflon insulated wire				N/A						

H214 - 8K x 16 BIT MEMORY STACK		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00001	6/72	B			<u>NOTE:</u> Print change			Nil					
00002	1/73	C			<u>NOTE:</u> Reference chart for H214, H215, H216 and G645 etch & CS revs			Nil					
00003	6/73	D			<u>NOTE:</u> Allowable I.C. substitution is DEC 2501 to DEC 2501-01, 2501-02, 2501-03			N/A					
00004	10/73	E			<u>NOTE:</u> Print correction			Nil					
00005	11/73	F			<u>NOTE:</u> Print correction			Nil					
00006	/74	H			<u>NOTE:</u> Documentation update								

M M M I I I L P

MM11-LP PARTS BREAKDOWN

G109	- Control & Data Loops
G231	- Memory Driver
H215	- 8K 16 Bit Memory Stack
MM11-LP	- One 8K Parity Memory Bank

ECO
QUICK
CHECK

NOV./74

MM11-LP PARTS BREAKDOWN

G109	- Control & Data Loops
G231	- Memory Driver
H215	- 8K 16 Bit Memory Stack
MM11-LP	- One 8K Parity Memory Bank

MAR/76

MM11-LP FIELD CODED ECO'S

G109

- C4, C6, C7, C10, C11

G231

- B1, D3, A5, D9

JAN./75

MM11-LP ECO PARTS

<u>NAME</u>	<u>ECO #</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G109	# 3, 3A	8	10-00064	Capacitor
		4	10-01610	Capacitor
		1	13-00309	Capacitor
		5	13-05324	Resistor
G109	# 6	1	16-11327	Delay
G109	# 10	1	10-01610	Capacitor
		A/R	91-07720-09	White Wire
G231	# 1	2	90-06892	Standoffs
G231	# 3	16	11-05275	Diode
G231	# 15	A/R	90-09185	Jumper Wire
M7259	# 4	1	13-01874	Resistor
		1	13-09143-11	Resistor

G109 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECC	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAM
00001	12/72	F	E		NOTE: New etch Rev			NIL					
00002 &A	12/72	E1	C		Standoffs are screwed on			N/A					
00003 &A	01/73	E2	C		C47 is a .01uf , 100V 20% disc capacitor C47 is directly below E40 E40 is the 1st I.C. from CT1 NOTE: DO NOT COUNT PULSE TRANSFORMER		8 4 1 5	10-000064 10-01610 13-00309 13-05324					
C 00004	01/73	E3	C	2.0	NOTE: Rework G109-YA only for parity memory Jumper from E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1			NIL	DZMFA				
00005	05/73	K	F		NOTE: Affects etch "E" and "F" revs DL3 is 125 n sec. delay line with part number L-00-01 and/or 16-11327 DL3 is the small delay line left of E28 E28 is the 6th I.C. from BE1			NIL					
C 00006	05/73	E4	C	1.0	NOTE: Affects etch "C" revs DL3 is a 125 n sec. delay line part number L-00-01 and/or 16-11327 DL3 is a small delay line left of E28 E28 is the 6th I.C. from BE1		1	16-11327	DZMMG DZQMB				

G109 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA
C 00007	05/73	E5	C	1.0	NOTE: Affects etch "C" rev G109 & G109-YA modules Jumper E04-04 to E07-07			NIL	DZQKB				
00008 &A	06/75	E6	C		NOTE: 1) Affects etch "C" revs. 2) Generate separate G109-YA documentation 3) Change component substitution list R96 is a 82 ohm 1/2W 5% resistor R96 is right of E44 E44 is the 2nd I.C. left of DA1			NIL					
00009	12/73	L	F		NOTE: Affects etch "E" & "F" rev - G109 and G109-YA. Jumper E04-04 to E07-07		1	10-01610					
C 00010	12/73	E7	C	1.0	NOTE: Affects etch "C" rev White jumper from E32-06 to E58-14 E32 is the 4th I.C. from BS1 E58 is the 1st I.C. from FC1		1 A/R	10-01610 91-07720-09					
C 00011	12/73	E8	C	1.0	NOTE: Rework etch "C" rev Jumper or etch run from E26-08 to tap 10 of DL1 E26 is the 4th I.C. from BE1 DL1 is the biggest delay line			NIL	DZQMB				
00012 &A	06/74	M	H		NOTE: Affects etch "F" rev Jumper E26-08 to DL1-10 E26 is the 3rd I.C. from BE1 DL1 is the biggest delay line			N/A					

G109 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAM
00013	07/74	E9	C		NOTE: Phase in DEC 8640 to replace DEC 380 and DEC 7380 chips.		8	19-11469					
00014	05/76	P	H		NOTE: DEC 7438 allowable I.C. substitution for 74H01-1 at E5, E18 to E22.			NIL					

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CB NAM	
B 00001	6/72	C	C	3.0	Two standoffs to prevent shorting			2	90-06892						
00002	8/72	D	D		Four standoffs on module				Nil						
D 00003	8/72	E	D	4.0	NOTE: Rework only "C" etch modules D116 is a D672 diode instead of being a resistor D116 is the only diode right of E1			16	11-05275	DZMMI					
00004 & 4A	8/72	F	E		E2 is a DEC I.C. 1074H00 E2 is the I.C. closest to the top left corner.				Nil						
A 00005	8/72	E1	C	4.0	NOTE: Rework only G231's with etch rev "C" which are in 11/05 and ME11 systems. 11/45 memories do <u>not</u> need this ECO Jumper from R101 to Q7 R101 is the 3rd resistor from bottom left corner Q7 is the biggest transistor from E1				Nil						
00006	8/72	E2	C		R170 is a 100 ohm 1/4W 5% resistor R170 is the 2nd resistor from top edge of board in the 1st row of resistors left of E1				Nil						
00007	9/72	E3	C		NOTE: Print update				Nil						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00008	9/72	E1A E2A E3A	C C C		C52 is a 470 pfd 100V 5% capacitor C52 is at the far left of DR1 and the only component between two transistors				Nil						
D 00009	12/12	E4	C	N/A	NOTE: Field service clarification for etch "C" modules				Nil						
00010	3/73	H	E		E1 is a DEC I.C. 4011 quad transistor				N/A						
00011	4/73	E5	C		E1 is a DEC I.C. 4011 quad transistor				N/A						
00012	4/73	J	E		NOTE: Affects etch "E" rev only R176 is a 4.7K 1/4W 5% resistor R176 is the 1st resistor below two transistors at the far left of EJ1				N/A						
00013	11/73	K	E		NOTE: I.C. substitution cancelled by ECO # 16				N/A						
00014	2/74	L	E		Q12 as snap-on heat sink Q12 is closest transistor to bottom left corner.				N/A						
00015	6/74	M	E ALL		NOTE: This ECO affects all etch rev modules. J1 & J2 have insulated jumper wire J1 & J2 are between E31 and E34 E31 is the last I.C. from CD slot				N/A						
00016	/74	N E6	E C		NOTE: I.C. 380 and 7380 are unsuitable E9, E15, E16, E17 are I.C. DEC 8640's E9 is the last I.C. from AV1 E15 is the 1st I.C. from BF1				N/A						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME			
00017	01/75	P	E		Q6 is a DEC 6534C transistor Q6 is the <u>last</u> transistor from EJ1		N/A								
00018	04/75	R	E		<u>NOTE:</u> Phase in jumper wire For current loops useing teflon insulated wire		N/A								

H215 8K x 18 BIT MEMORY STACK				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	7/73	A			NOTE: Print change										

MM11'S

MM11-S PARTS BREAKDOWN

7008816	-Backplane Assembly
7008855-2B	-11/45 MM11 Power Cable (old)
7008909	-11/40 MM11 Power Cable (old)
7009562	-G772 System Unit Harness (new)
G110	-Control & Data Loops
G231	-Memory Drivers
H214	-8K Bank of Core Memory
BC11-A	-Unibus Cable
M920	-Unibus Jumper
MM11-S	-Single Backplane Unit

DOLO

2356 R624

PROCESSOR TYPE PDP-11/45

MM11S-00001 CODE: D WL: A
APR 72 - PROBLEM Missing wires on MM11-S back plane for signal
SPG#
CORRECTION Add three wires to Wire List
In plant effectivity 03 rework immediately

MM11S-00002 CODE: P
SEP 72 - CORRECTION Make corrections to Drawing Directory, BDD-
MM11-S
In plant effectivity 06 documentation change only

MM11S-00003 CODE: F
OCT 72 - PROBLEM Under some conditions, when other options are
placed beside an MM11-S, they fail to operate correctly
CORRECTION Install a #74-08490 module protection plate

NOTE: This FCO is required when other options such as KW11-P, etc are
physically mounted next to an MM11-S memory. Noise generated by the
MM11-S may interact with adjacent modules.
In plant effectivity 02 phase in
Field effectivity Retrofit all MM11-S memories as required
DD revision B is created (Time To Install And Test 3 Hour)
(Kit Contents FCO/Prints And Parts)

MM11S-00004 CODE: P DD: C
NOV 72 - CORRECTION Add Manufacturing Test Procedures for MM11-
K, L, M and S and drawing ASP MM11-L, S, M and Systems to
Drawing Directory
In plant effectivity 06 documentation change only

ECO
QUICK
CHECK

MM11-S PARTS BREAKDOWN

7008816	-Backplane Assembly
7008855-2B	-11/45 MM11 Power Cable (old)
7008909	-11/40 MM11 Power Cable (old)
7009562	-G772 System Unit Harness (new)
G110	-Control & Data Loops
G231	-Memory Drivers
H214	-8K Bank of Core Memory
BC11-A	-Unibus Cable
M920	-Unibus Jumper
MM11-S	-Single Backplane Unit

JAN/75

MM11-S ECO PARTS

<u>NAME</u>	<u>ECO #</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G110	# 4	1	13-00365	Resistor
	# 5	1	10-05306	Capacitor
		4	90-08213	Standoffs
	# 9	A/R	17-00024	# 10 black/white gd.wire
	#10	1	19-05547	I.C.
	#15	1	16-11327	Delay
	#18	1	10-01610	Capacitor
G231	# 1	2	90-06892	Standoffs
	# 3	16	11-05275	Diode
	#15	A/R	90-09185	Jumper wire
MM11-S	# 3	1	74-08490	Shield

JAN./75

MM11-S FIELD CODED ECO'S

G110	B4, B5, C9, C10 & A, D12, D13 & A, C15 & A, C16, B18, C19
G231	B1, D3, A5, D9
MM11-S	C3

MM11-S 8K 16 BIT MEMORY				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME			
00001	4/72		A		Jumper AO1-U1 to AO2-U1		Nil								
00002	9/72				<u>NOTE:</u> Print change		Nil								
C 00003	10/72			.5	A module protection plate beside MM11-S memory bank.	1	74-08490								
00004	11/72				<u>NOTE:</u> Adds test procedures for MM11-K, L, M, S and SP modules and systems		Nil								
00005	10/73				Jumper CO2-A2 to F01-A2		Nil								
00006	2/74				<u>NOTE:</u> New harness (7009562) introduced for 15 pin power distribution. 11/40 and 11/45 with serial numbers greater than 6000 and 2000 respectively have a G772 system unit harness										
00007	05/75				<u>NOTE:</u> Document update										
00008	05/76				<u>NOTE:</u> Documentation update		NIL								

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00001	03/72	A	C		R118 is a 220 ohm resistor R118 is left of E28 and right of DL3 or possibly under DL3 E28 is the 6th I.C. from BE1 DL3 is the small delay line right of DL1 DL1 is the biggest delay line			N11					
00002	03/72	B	C		DL3 is a 100n sec. delay line with part number D-10100 and/or 1609559 DL3 is a small delay line just right of DL1-08 DL1 is the biggest delay line on board DL3 CHANGED TO 125 N SEC. (P/N-322-1) <u>AND/OR 1611327 BY ECO #15 +15A</u>			N11					
00003	08/72	C	D		R113 is a 120 ohm 1/4W 5% resistor R113 is located at AS1 below DL2 DL2 is between E1 and E2			N11					
B 00004	08/72	D	C	1.0	NOTE: This ECO affects only "C" etch modules R115 is a 1K 1/4W 5% resistor R115 is the 3rd resistor right of DL1-12 DL1 is the biggest delay line		1	13-00365					
B 00005	08/72	E	C	3.0	NOTE: This ECO affects only "C" etch modules C152 is a 6.8 ufd. capacitor with the cathode connected to the + etch on board. C152 is the capacitor right of DL1 -02 DL1 is the biggest delay line		1 4	10-05306 90-08213	DZMMG DZMMI				

G110 CONTROL & DATA LOOPS				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE		
															2	OF	4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME			
00006	11/72	F	E		R123 is a 390 ohm 1/4W 5% resistor R123 is the closest resistor to BS1				N11								
00007	09/72	E1	C		4 - Standoffs <u>screwed</u> on				N11								
00008	10/72	E2	C		C47 is a .01 uf 100V 20% disc capacitor C47 is directly below E40 E40 is the 1st I.C. from CT1 DO NOT COUNT PULSE TRANSFORMER AS I.C.				N/A								
C 00009	12/72	E3	C	.5	Four #18 gauge black ground jumpers on SIDE ONE INSTEAD OF ON SIDE # TWO				17-00024 (#18 black & white teflon coated)								
C 00010 & 10A	11/72	E4	C	1.0	Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1			1	19-05547	DZQKB							
00011	12/72				<u>NOTE:</u> This ECO deleted				N/A								
D 00012	12/72	E5	C	N/A	<u>NOTE:</u> Print update affecting only "C" etch modules.				N11								

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE
													3 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
D 00013 & 13A	01/73	E6	C	.5	NOTE: Rework only "C" etch modules Jumper pin 4 to 13 on spare I.C. slot above E40 E40 is the 1st I.C. from CT1			N11	DZQMB				
00014	03/73	K	F		NOTE: This ECO affects only CS "F" etch "E" modules Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1			N/A					
00014A	03/73	K	F		NOTE: This ECO affects E & F etch revs modules DL3 is 125 n sec. delay line with P/N 1-322-1 and or 1611327 DL3 is small delay line right of the big delay line			N/A					
C 00015 & 15A	05/73	E7	C	1.0	NOTE: This ECO affects "C" etch rev modules DL3 is 125 n sec. delay line with P/N L-00-01 and/or 1611327 DL3 is small delay line right of the big delay line		1	16-11327	DZMMG DZQKB DZQGA				
C 00016	06/73	E8	C	2.0	NOTE: Rework only "C" etch rev modules Jumper E04-04 to E07-07			N11	DZMMG DZQKB DZQGA				
00017	12/73	L	F		NOTE: This ECO affect only "E" & "F" etch rev modules Jumper E04-04 to E07-07			N11					

REVISION DATE MAY . /76

CONTROL & DATA LOOP		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE
G110													4 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00018	10/73	E9	C	1.0	NOTE: Rework etch "C" Rev White wire of twisted pair from E32-06 feed through to E58-14 E32 is the 4th I.C from BS1 E58 is the 1st I.C from FC1	1	10-01610						
C 00019	12/73	E10	C	1.0	NOTE: Rework "C" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line		NIL	DZQMB					
00020 &A	01/74	M	H		NOTE: Affects "F" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line		N/A						
00021	07/74	N N E11 E11	H F E C		NOTE: Phase in DEC 8640's to replace DEC 380's		N/A						
00022	05/76	P	H		NOTE: DEC 7438 allowable I.C. substitution for 74H01-1 at E5, E18-E22		NIL						

G231 MEMORY DRIVER					ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO				QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00001	6/72	C	C	3.0	Two standoffs to prevent shorting				2	90-06892						
00002	8/72	D	D		Four standoffs on module					Nil						
D 00003	8/72	E	D	4.0	NOTE: Rework only "C" etch modules D116 is a D672 diode instead of being a resistor D116 is the only diode right of E1				16	11-05275	DZMMI					
00004 & 4A	8/72	F	E		E2 is a DEC I.C. 1074H00 E2 is the I.C. closest to the top left corner.					Nil						
A 00005	8/72	E1	C	4.0	NOTE: Rework only G231's with etch rev "C" which are in 11/05 and ME11 systems. 11/45 memories do <u>not</u> need this ECO Jumper from R101 to Q7 R101 is the 3rd resistor from bottom left corner Q7 is the biggest transistor from EL1					Nil						
00006	8/72	E2	C		R170 is a 100 ohm 1/4W 5% resistor R170 is the 2nd resistor from top edge of board in the 1st row of resistors left of E1					Nil						
00007	9/72	E3	C		NOTE: Print update					Nil						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00017	01/75	P	E		Q6 is a DEC 6534C transistor Q6 is the <u>last</u> transistor from EJ1				N/A						
00018	04/75	R	E		<u>NOTE:</u> Phase in jumper wire For current loops using teflon insulated wire				N/A						

1214 - 8K x 16 BIT MEMORY STACK				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO				QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00001	6/72	B			<u>NOTE:</u> Print change					Nil					
00002	1/73	C			<u>NOTE:</u> Reference chart for H214, H215, H216 and G645 etch & CS revs					Nil					
00003	6/73	D			<u>NOTE:</u> Allowable I.C. substitution is DEC 2501 to DEC 2501-01, 2501-02, 2501-03					N/A					
00004	10/73	E			<u>NOTE:</u> Print correction					Nil					
00005	11/73	F			<u>NOTE:</u> Print correction					Nil					
00006	/74	H			<u>NOTE:</u> Documentation update										

FECO'S

digital
ENGINEERING
CHANGE ORDER

ORIGINATOR R. Manion 1-3
TEL EXT 2005 DATE 10/16/72
DISC PROJ NO. **E96A 06315**
COST CENTER NO. 392
W.O. 1732

ECO NO. **MM11S-00003**
SHEET **1** OF **2**
DATE RECEIVED **10-17-72**
FIRST ISSUE **10-19-72**
FINAL ISSUE **11-14-72**

PROBLEM

Under some conditions when other options are placed along side an MM11/S they fail to operate correctly.

UNIT TO BE CHANGED

MM11/S
MEMORY

DISP CODE *02

OPTIONS AFFECTED

MM11/S
MM11/SP

CORRECTION

Install a module protection plate.

PRODUCT LINES AFFECTED

PDP11/45

BREAK-IN/EFFECTIVITY

*Install on all units in production.
Install in field if required.

ITEM NO.	DOCUMENT/PART NO.	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE	DOCUMENTATION AFFECTED	FIELD SERVICE AFFECTED	TYPE OF CHANGE
1.	B-DD-MM11-S	A	B	06	(Drawing Directory) Change per this ECO. (Module Protection Plate) Add D-MD-7408490-0-0 to drawing directory.	<input type="checkbox"/> MODEL <input type="checkbox"/> DIAGNOSTICS <input type="checkbox"/> TECH MANUAL <input type="checkbox"/> TESTER <input type="checkbox"/> TEST PROG <input type="checkbox"/> TOOLING <input type="checkbox"/> PKG INST <input type="checkbox"/> ENG SPEC <input type="checkbox"/> PURCH SPEC	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> Customer Charge <input checked="" type="checkbox"/> Product Line Charge	<input type="checkbox"/> ELECTRICAL <input checked="" type="checkbox"/> MECHANICAL <input type="checkbox"/> MODULE ORDER PR MODEL <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

DISPOSITION CODES

- 00 - RETURN TO STOCK
- 01 - (DELETED)
- 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
- 03 - REWORK IMMEDIATELY (RETROFIT)
- 04 - (DELETED)
- 05 - (DELETED)
- 06 - DOCUMENT CORRECTION
- 07 - NEW ITEM (THIS ASSEMBLY)
- 08 - NEW ITEM (THIS COMPANY)
- 09 - SCRAP IMMEDIATELY

APPROVAL SIGNATURES

DESIGN ENGR ^{1-3 Typewritten} **Pete Durant** ^{Hand Signature} *P. Durant*
 ENG MGR (OPT) _____
 FIELD SERVICE (OPT) _____
 CHIEF ENGR (MODULES ONLY) _____

digital

FIELD CHANGE ORDER

FCO MM1S - C 0003
PAGE OF

DATA PROCESSING AND DEC ECO LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO.

*** LEVEL OF URGENCY CODE**

- A MANDATORY - HIGH PRIORITY
- B MANDATORY
- C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- E PRODUCT IMPROVEMENT - OPTIONAL - LOW PRIORITY

FIELD EFFECTIVITY
Retrofit all MM1-S memories as required

FIELD RETROFIT IS ANTICIPATED IN % OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER - ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE.

STANDARD APPLICABILITY - THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE, OTHERWISE AT CUSTOMER EXPENSE.

DOCUMENTATION \$ PARTS \$ DEC ON SITE LABOR \$

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.

DISCRETE PROJECT NUMBER (FOR FIELD SERVICE REPORTING) W67

AVAILABILITY DELAY None NO PARTS

ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING 0.5 HOURS

SPECIAL TEST EQUIPMENT, TOOLS, OR SUPPLIES

FIELD OFFICE FCO DISTRIBUTION CODE

- F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES
- DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT

FCO KIT DISTRIBUTION

KITS, AS DEFINED BELOW, MAY BE ORDERED AS REQUIRED.

CONTENTS OF AN FSIC INITIATED KIT

FIO	FCO	PRINTS	PARTS

CONTENTS OF A FIELD ORDERED KIT

FIO	FCO	PRINTS	PARTS
	X	X	X

FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES:

D	H	K	W		
---	---	---	---	--	--

LAST PREVIOUS FCO'S None

RELATED OR PREREQUISITE FCO'S

- MAINDEC CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

VERIFICATION MAINDECS

11-DZQMB

INSTALLATION AND TEST PROCEDURES

PARTS REQUIRED

Q1 74-08490 Module protection plate

NOTES This FCO is required when other options such as KW11-P, etc. are physically mounted next to an MM11-S memory. Noise generated by the MM11-S may interact with adjacent modules.

FIELD SERVICE APPROVAL


Art Zins

Art Zins

10/30 450

MM115 REWORK SHEET

1. LOOSEN 2 SCREWS AT POINTS A. CARE SHOULD BE USED AT ALL TIME SO THAT NO WIRES ARE DAMAGED.
2. SLIDE THE FINGERS OF THE MODULE PROTECTION PLATE UNDER THE GND LUGS. THE PROTECTION PLATE SHOULD BE RIGHT AGAINST THE WIRED ASSY. FRAME, POINT B.
3. TIGHTEN SCREWS.

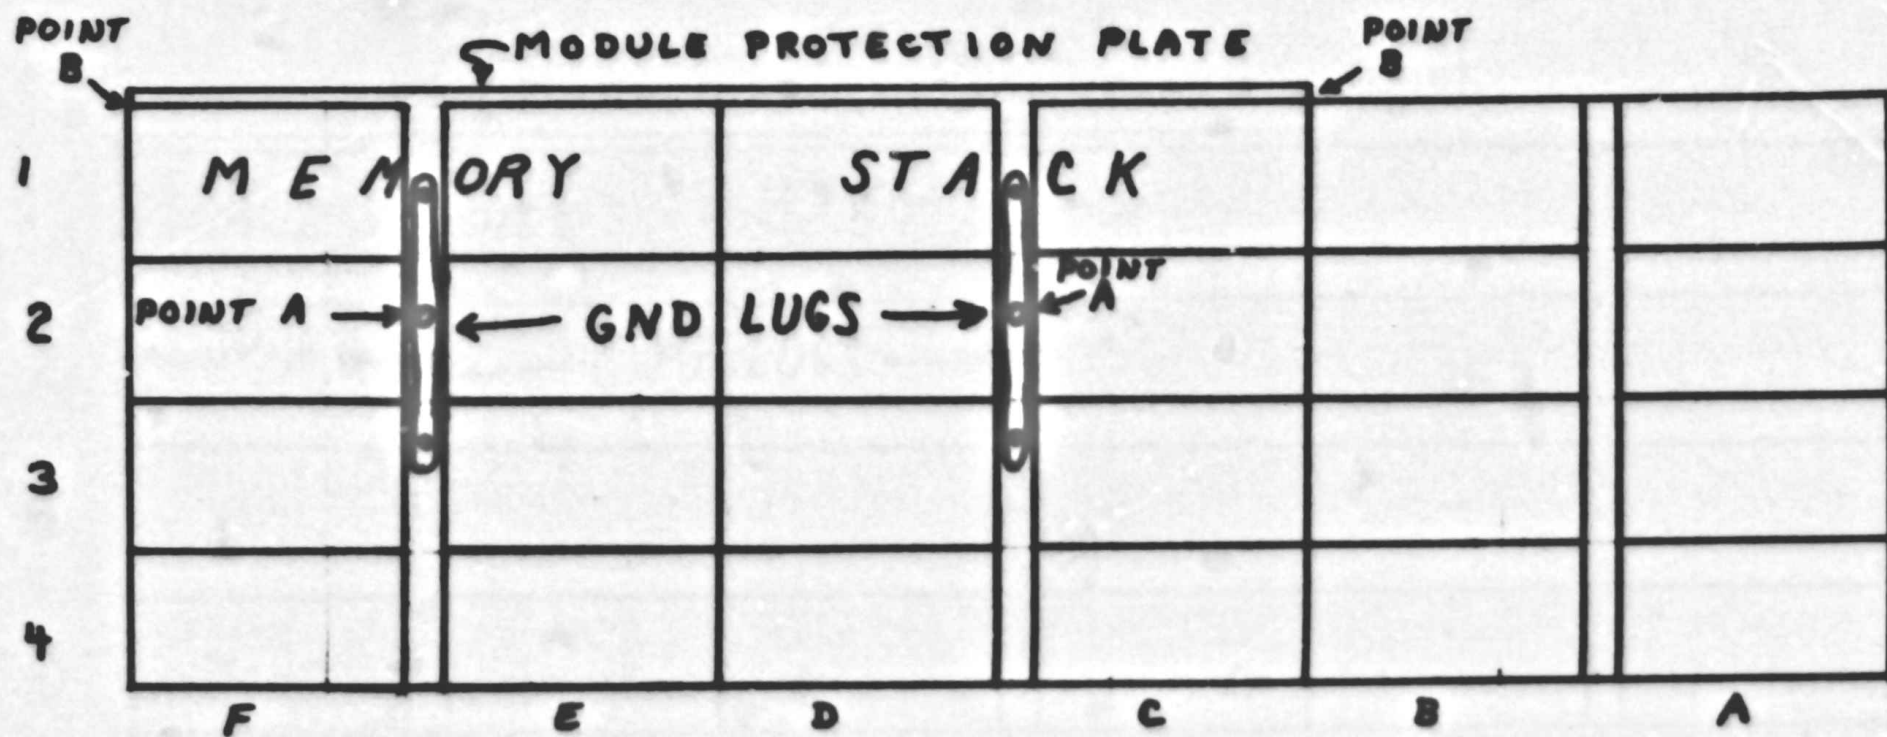

MM115-00003
Sheet 2 of 2

M M m m i i - u u p p

NOTE: 1) MM11-U/UP are combined together for convenience

MM11-U/UP PARTS BREAKDOWN

G114	- 16K sense memory
G235	- 16K X-Y driver
H217-C	- parity memory stack (16K X 18 bit)
H217-D	- memory stack (16K X 16 bit)
M8239	- 16K timing module
MM11-U/UP	- 16K Core Memory/Parity

MM11-U/UP FIELD CODED ECO's

G114	- I5
G235	- I8

MM11-U/UP ECO PARTS

<u>NAME</u>	<u>ECO#</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G235	#8	1	13-00364	Resistor
		1	13-02388	Resistor

ECO
QUICK
CHECK

NOTE: 1) MM11-U/UP are combined together for convenience

MM11-U/UP PARTS BREAKDOWN

G114	- 16K sense memory
G235	- 16K X-Y driver
H217-C	- parity memory stack (16K X 18 bit)
H217-D	- memory stack (16K X 16 bit)
M8239	- 16K timing module
MM11-U/UP	- 16K Core Memory/Parity

MM11-U/UP FIELD CODED ECO's

G114	- I5
G235	- I8

MM11-U/UP ECO PARTS

<u>NAME</u>	<u>ECO#</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS & DESCRIPTION</u>
G235	#8	1	13-00364	Resistor
		1	13-02388	Resistor

G114 16K SENSE INHIBIT		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	10/73	B	B		<u>NOTE:</u> Cancelled By ECO# 1A		NIL						
00001A	10/73	B	B		Gnd Jumper from FT1 and along the bottom of the board	A/R	91-07470-00						
00002	11/73	C	B		R108 is a <u>56 OHM</u> , 1/2W, 5% resistor R108 to the right of T103 T103 is a transformer along AC1 near handle side.		N/A						
00003	10/74	D	C		<u>NOTE:</u> New Etch Rev.		NIL						
00004	04/75	E	C		<u>NOTE:</u> Part substitution due to shortage		N/A						
I 00005	05/75	F	C	.5	<u>NOTE:</u> Affects only etch "C" rev's Measure open circuit from the top left metal handle to ground		NIL						

G235		16K X-Y DRIVER		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 2
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	07/73	D	D		R35 is a <u>3.16K</u> , 1/8W, 1% resistor R35 is located below W4 W4 is left of E2-01 E2 is the 2nd I.C. from AT1			1 1	13-00229 13-03045						
00002	09/73	E	D		R92 is <u>NOT</u> a 330ohm, 1/2W, 5% resistor R92 is the 4th component above R101 R101 is 220 ohm, 2W resistor left at AT1			1 2 1	11-03441 13-00271 13-02379						
00003	11/73	F	D		R29 is a <u>120K</u> , 1/2W 5% resistor R29 is the 1st resistor above Q14 Q14 is the transistor above E4 E4 is the 2nd I.C. from BL1				N/A						
00004	01/74	H	D		D2, D3, D4 are deleted No diodes between E2 and R18 R18 is a 100ohm resistor, above E2			1 1	15-05321 19-10466						
00005	04/74	J	D		C47 is a .022 ufd capacitor C47 is the 1st capacitor below T2 T2 is a transformer at the far left of AN1			2 1	10-11683 13-04855						
00006	08/74	K	D		Delete C44 Only one 47ufd, 20V, 10% capacitor still present (not two) between Q12 and Q13 Q12 and Q13 are the 1st and 2nd transistors from AE1				NIL						

REVISION DATE MAY /76

G235 16K X-Y DRIVER		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 2
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00007	04/75	L	D		NOTE: Parts substitution due to shortages			NIL					
I 00008	06/75	L	D		NOTE: Must have if used on MA20-M for PDP10 R23 is an 1K 1/2W resistor R23 is the only resistor left of AA1		1 1	13-00364 13-02388					
I 00009 &A	06/76	N	D		R103 is a 75 ohm 1W 5% resistor R103 is immediately right of Q12 Q12 is the 2nd transistor from AC1								

H217 16K STACK		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAD	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CB NAME
00001	05/74				NOTE: Manufacturing Change			NIL					
00002	07/74				NOTE: Document Change			NIL					
00003	10/74	B	E		NOTE: Rework H217-B and C (18 or 19 Bit) Diodes D29, D30 are deleted D29, D30 were Diodes left of CE1 but right of the resistor network			NIL					
00004	03/76	C	E		NOTE: Manufacturing change.			NIL					

REVISION DATE MAY/76

16K UNIBUS TIMING		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
M8293			MF11-U										
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	10/73	B	B		NOTE: This is a mandatory ECO Measure continuity from E21-03 to E25-13 E21 is the 2nd I.C. from CL1 E25 is below E21		NIL						
00002	11/73	C	B		NOTE: This is a mandatory ECO Measure continuity from E03-05 to DL3-05 DL3 is the only delay line left of AR1		NIL						
00003 6A	06/74	D	C		NOTE: New etch rev		N/A						
00004	06/75	E	C		NOTE: Phase in DEC 8640 to replace DEC 380		N/A						
00005	06/76	F	C B		NOTE: Introduces M8293-YB for XM15 M8293-YB can be distinguished by checking for jumper from E38-12 to E38-13 E38 is the 4th I.C. from DT1		NIL						