

# MM11

TECHNICAL  
INFORMATION  
COMPANY CONFIDENTIAL

EP-MM11-TI-A  
COPYRIGHT © 1978  
FICHE 1 OF 1

MAR 1978  
**digital**  
MADE IN USA

MM11	MM11-E	MM11-F	MM11-L	MM11-LP	MM11-S	MM11-U/UP
		DOL	FCR	FCR		FCR
TECH TIPS	DOL				DOL	
		FCO's		ECO QUICK CHECK		ECO QUICK CHECK
			FCR	ECO QUICK CHECK	FCO's	
	FCO's					
					FCR	
					ECO QUICK CHECK	

MM11

THE FOLLOWING MODULE/ASSEMBLIES ARE CONTAINED IN THIS DEVICE. EACH MAY HAVE ASSOCIATED TECH TIPS,  
DEC-O-LOG AND FCO's DOCUMENTED IN THE MODULE/ASSEMBLY CATEGORY OF THE MICROFICHE LIBRARY.

70-06468  
70-07263  
70-09562

G102  
G103  
G109  
G110  
G225  
G226  
G231  
G615  
G616  
G645

H213  
H214

M109  
M229  
M1091  
M7290

# TECH. TIPS

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator MM11
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	

Title QUALADYNE 1540 SENSE AMPS				Tech Tip MM11 Number 01	
All	Processor Applicability	Author DON ZERESKI	Rev A	Cross Reference	
		Approval CHUCK DEWEY	Date 6/27/72		

The Qualadyne 1540 sense amps have had bonding problems. The unit is used in most current DEC sense amplifier boards. The Motorola 1540 should be used as its replacement when necessary. Most of the defective units have been replaced during production. These were used in MM11-E and F memories.

Since the Motorola 1540 units are in short supply, Production is only replacing failing units and are not retrofitting all boards in all product lines. Machines in the field that exhibit strange memory problems that can be localized to sense amp problems should be checked for Qualadyne units with the following date codes: 7014, 7016, 7020, 7022, 7024, 7031, and 7032. These units may be defective and should be replaced as a last resort. We are not suggesting a purge of all Qualadyne units of the above mentioned date codes or future Qualadyne units.

Title H207E MEMORY STACK				Tech Tip MM11 Number 02	
All	Processor Applicability	Author TOM KARPOWSKI	Rev A	Cross Reference	
		Approval CHUCK DEWEY	Date 6/27/72		

The MM11-E memory will be using a new stack, RCA's H207E. This stack can only be used in an MM11-E. The H207 stack can be used in an MM11-E and MM11-F.

Title MM11-E & F/G102 MODULES				Tech Tip MM11 Number 03	
All	Processor Applicability	Author TOM KARPOWSKI	Rev B	Cross Reference	
		Approval CHUCK DEWEY	Date 6/1/72		

ECO G102-00005 has been written to make the G102 module capable of running in the MM11-F memory. This ECO makes this module CS revision D. It has to be at least revision D to run in an MM11-F. This revision can also be used in MM11-E's. Please see that your spares are modified accordingly.

Title INTERLEAVING THE MM11-E MEMORY				Tech Tip MM11 Number 04	
All	Processor Applicability	Author JOHN BUZYNSKI	Rev p	Cross Reference	
		Approval CHUCK DEWEY	Date 6/1/72		

Interleaving is simply addressing the memory such that adjacent memory banks are selected on alternate cycles. Thus, it is interleavable in 8K increments or blocks. This is implemented by interchanging BUS A01L and BUS A13L inputs to the memory between the bus inputs and memory device select and control. The memory being addressed, for example, in a DAT1 mode is free to complete its cycle after the MSYN L-SSYN I dialog and as soon as the setup times for the bus are satisfied, MSYN L can be reasserted to

Title INTERLEAVING THE M11-E MEMORY (Continued)				Tech Tip M11 Number 04	
AN	Processor Applicability			Author JOHN BUZYNSKI	Rev 0
				Approval CHUCK DEWEY	Date 6/1/72
Cross Reference					

start a memory cycle in the adjacent memory bank while the first memory bank is completing its cycle. A significant increase in memory throughput occurs.

In the M11-E the two address bits have to be physically interchanged on the back-plane. It is also necessary to modify M729 control logic module to speed up the SSYNL reset circuit. (Refer to ECO's M11-E Numbers 17, 19, and 20; M729 number 2; and ECO M1091 number 1).

Remember, when troubleshooting an interleaved memory, that successive addresses reference alternate memory banks.

Title FIELD INSTALLATION OF M11-E ON PDP-11/45				Tech Tip M11 Number 05	
AN	Processor Applicability			Author ANDY VEROSTIC	Rev 0
	11/45			Approval ART ZINS	Date 6/7/72
Cross Reference					

HARDWARE

Existing M729 control must have ECO #M729-~~0000~~3 installed for operation on 11/45.

DIAGNOSTICS

All present memory tests will run on the 11/45.


Title FIELD INSTALLATION OF M11-F ON PDP-11/45				Tech Tip M11 Number 06	
AN	Processor Applicability			Author ANDY VEROSTIC	Rev A
	11/45			Approval ART ZINS	Date 6/7/72
Cross Reference					

HARDWARE

Existing M7290 control must have ECO's #M7290-~~0000~~2 and ~~0000~~3 installed for proper operation on the 11/45.

DIAGNOSTICS

All present memory tests run on the 11/45.

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11
Title MM11-E and F MEMORY ADDRESS SELECTION AND INTERLEAVING				Tech Tip MM11-TT Number 07	
AN	Processor Applicability		Author Chuck Dewey	Rev 0	Cross Reference
			Approval Chuck Dewey	Date 9/28/72	

### Address Selection

MM11-E Memories have had two types of address selection modules. The M109 was the original address selector and may still be found in some installations. The M109 causes insertion of two UNIBUS unit loads. This was corrected when the M1091 was introduced (ECO M1091-00001). Selection of addresses when using M109 is described in the hardware manual (DEC-11-MR1B-D).

Both the MM11-E and MM11-F memories now utilize M1091 address selector modules. Figure 2 shows the circuit schematic of the M1091 address selection logic. Figure 1 shows a layout of that portion of the physical module where the addressing is accomplished by insertion or removal of jumper wires. Table 1 lists the following:

- a. Bank Number - These numbers are indicative of the physical system units of MM11-E or F memories.
- b. K Words - This indicates the word quantity for a specific bank in thousands (K) words.
- c. Addresses - The inclusive (octal) word (two byte) addresses within a specific bank of memory are listed here. They assume a non-interleaved configuration.
- d. Bits 17, 16, 15, 14, 13 and 01 Non-Interleaved  
These columns show, by an X, that jumper which should be installed in order to respond to a specific memory bank addressing. The 1, 0, A, B, C and D correspond to the identification shown on the module, figure 1, and figure 2.
- e. Bits 13, and 01 Interleaved - These two bits accomplish the interleaving for MM11-F memories and are to be used in place of their counterparts listed for d, above. When used these cause modification of two 4K Banks so that their addressing has the lower (odd) bank with addresses ending with 0 or 4 and upper (even) bank ending with 2 or 6.


Title		MM11-E and F MEMORY ADDRESS SELECTION AND INTERLEAVING		Tech Tip		MM11-TT	
All		Processor Applicability		Author		Chuck Dewey	
				Rev		g	
		Approval		Date		9/28/72	
				Cross Reference			

Interleaving

Interleaving for MM11-E memories is described in Tech Tip MM11 number 4. It can only be accomplished by system unit wire changes to the back plane. Refer to the ECO's, listed in the Tech Tip, for proper implementation.

MM11-F interleaving is accomplished by manipulation of jumper wires on the M1091 module. These changes are shown in Table 1. It is a normal procedure for the production line to interleave all 8K segments of MM11-F memory on the initial system prior to shipment.

Interleaving of a MM11-E with an MM11-F is not recommended primarily due to the confusion it creates when troubleshooting a system of this nature. It also creates customer misunderstanding since the average memory cycle time specification, in this situation, would not be either the MM11-E or F but somewhere in between.

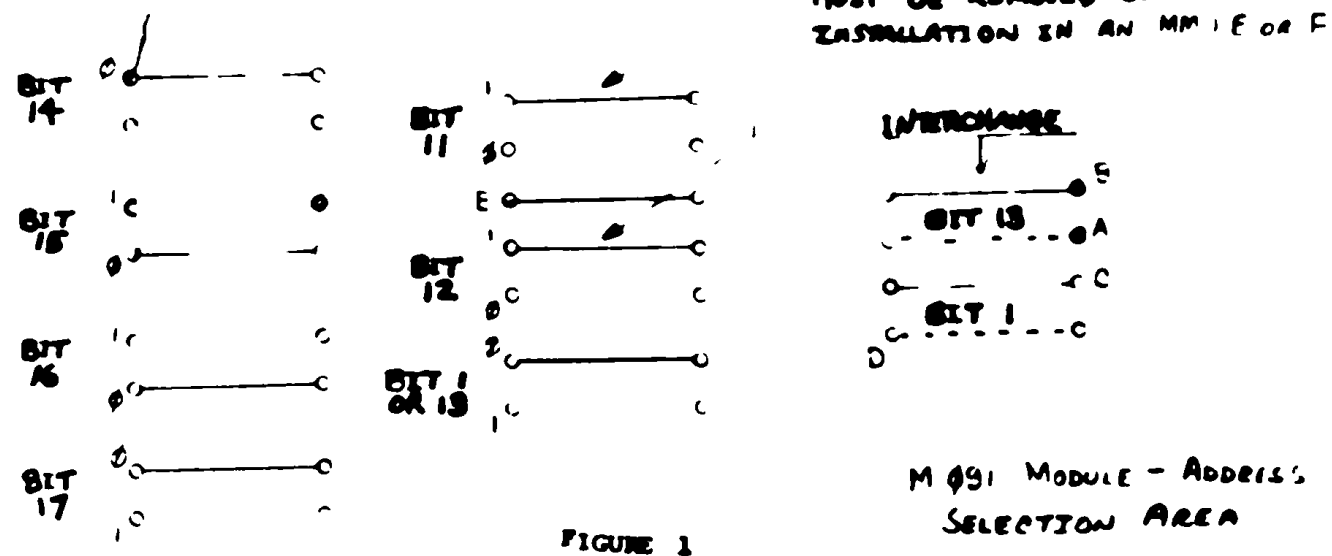

<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator
12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11
Title MM11-E and F MEMORY ADDRESS SELECTION & INTERLEAVING (CONT'D)			Tech Tip Number	MM11-TT 07
Processor Applicability All		Author Chuck Dewey	Rev g	Cross Reference
		Approval Chuck Dewey	Date 9/28/72	

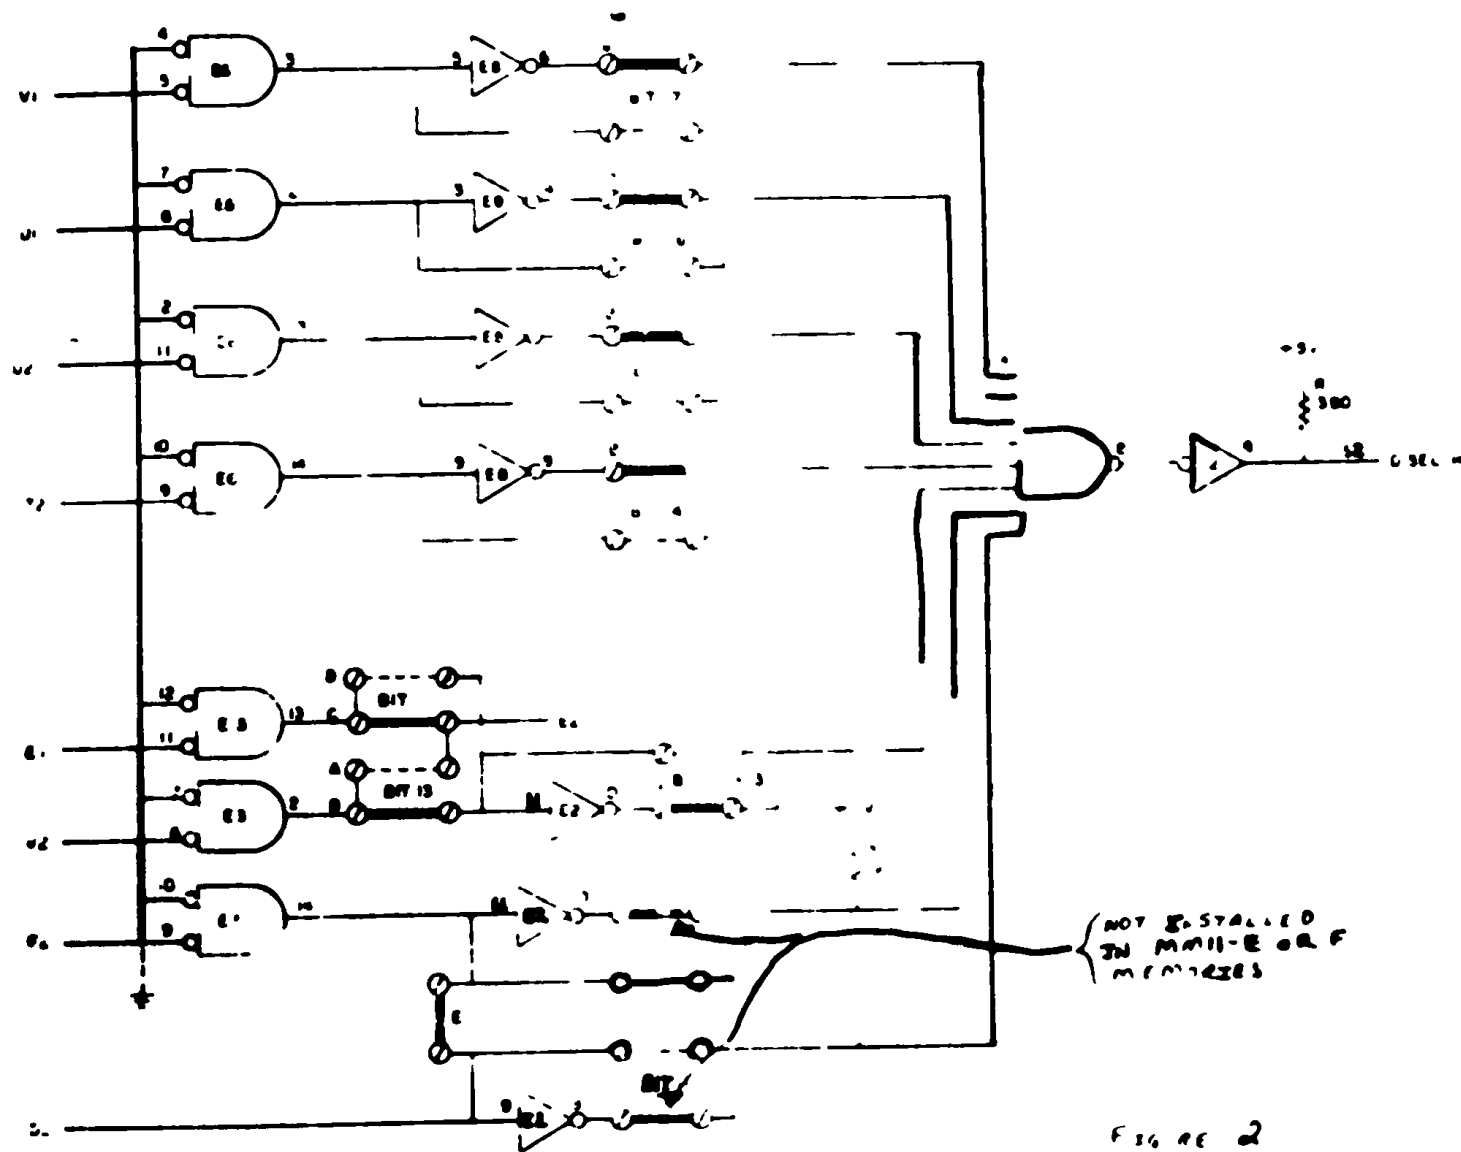


FIGURE 2

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE, THEREFORE, ONLY PARTS OF IT ARE READABLE.

HL

Title MM11-E and F MEMORY ADDRESS SELECTION & INTERLEAVING (CONT'D)				Tech Tip MM11-TT Number 07	
All Processor Applicability		Author Chuck Dewey	Rev 8	Cross Reference	
		Approval Chuck Dewey	Date 9/28/72		


TABLE 1

Bank	K WORDS	ADDRESSES		NON-INTERLEAVED MM11-F AND ALL MM11-E MEMORIES										INTERLEAVED MM11-F MEMORY *					
		FROM	TO	17		16		15		14		13		01		13		01	
				1	0	1	0	1	0	1	0	A	B	C	D	A	B	C	D
1	0-4	00000	017776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
2	4-8	02000	037776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
3	8-12	04000	057776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
4	12-16	06000	077776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
5	16-20	10000	117776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
6	20-24	12000	137776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
7	24-28	14000	157776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
FROM THIS POINT ON A DEVICE SUCH AS MX11, KS11, OR KT11 IS REQUIRED																			
8	28-32	16000	177776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
9	32-36	20000	217776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
10	36-40	22000	237776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
11	40-44	24000	257776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
12	44-48	26000	277776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
13	48-52	30000	317776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
14	52-56	32000	337776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
15	56-60	34000	357776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
16	60-64	36000	377776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
17	64-68	40000	417776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
18	68-72	42000	437776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
19	72-76	44000	457776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
20	76-80	46000	477776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
21	80-84	50000	517776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
22	84-88	52000	537776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
DE11 REQUIRED FROM THIS POINT IF M11 IS IN USE																			
23	88-92	54000	557776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
24	92-96	56000	577776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
25	96-100	60000	617776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
26	100-104	62000	637776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
27	104-108	64000	657776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
28	108-112	66000	677776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
29	112-116	70000	717776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
30	116-120	72000	737776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
31	120-124	74000	757776	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

SUS ADDRESSING BEYOND THIS POINT RESERVED FOR DEVICES

X DENOTES JUMPER INSERTION ON THE BOARD AT THE IDENTIFIED POINT

\* INTERLEAVING CAN ONLY BE ACCOMPLISHED WITH 8K SEGMENTS OF MEMORY. THE XXXXX0 AND XXXXX4 ADDRESSES ARE TO BE ASSIGNED TO ODD BANK MEMORIES

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11
<b>Title</b> DATA ERRORS CAUSED BY DCL0 OR INIT ON MM11-K, L, M, S				<b>Tech Tip Number</b> MM11 #8	
<b>All</b>	<b>Processor Applicability</b>		<b>Author</b> A. Verostic/D. Dickhut <b>Rev</b> 0		<b>Cross Reference</b>
			<b>Approval</b> Art Zins <b>Date</b> 9/27/72		

A problem exist with the 4K-8K PDP-11 memory (MM11-S, ME11, MM11-L) that appears to be hardware data errors, but disappears if every word in memory is accessed. The problem can appear whenever Initialize or DCL0 occurs during a memory cycle. This turns off the current drivers at the wrong time, leaving some cores in a partially switched state. These half-selected cores contribute large amounts of noise when accessing other words, causing intermittent failures.

The error occurring during a memory cycle can be eliminated if the power fail trap is used properly. The power fail trap sequence should turn off any peripheral that might access memory (individually, not by using INIT) and halt the processor before DCL0 occurs.

The chances of INIT occurring during a memory cycle will be reduced if software avoids using the RESET Instruction, particularly inside tight loops. The condition of half selected cores can be cured by accessing every word in memory to assure all cores are fully switched. Once this is completed, data may be read and written normally.

Title		Tech Tip MM 11	
MM11-K, L, M, and S Field Problem Summary		Number TT-9	
All	Processor Applicability	Author D. Dickhut	Rev #
		Approval C. Dewey	Date 11/20/72
Cross Reference			

This Tech Tip is a summary of field problems and their solutions for the MM11-K, L, M, and S memories which are found in ME11L which uses only MM11-L, 11/05 and 11/10 which use MM11-K (4K), 11/05 only and MM11-L (8K), 11/40 which uses only MM11-L (8K), and 11/45 which uses only MM11-S (8K).

1. Random Memory Locations are Altered During Power Fail

The contents may be altered while running Power Fail Diagnostic or by simply turning the machine on and off. ECO G231-5 solves this problem.

2. Memories do not have to be swapped as a system (all 3 modules)


Each system that is shipped has a serial number stamped on side 2 of each module. This number is the same on all 3 modules and is strictly for in-house test purposes only. The memories can be and should be maintained on a module swap basis instead of a system basis (stack not used anyway). The system serial number can be used in a case where much swapping has taken place and now the modules are to be put back in their original configuration. By matching the serial number, each system can be reunited and a lot of adjustment time can be saved.

3. What adjustments to make when a module is swapped.

When anyone of the 3 modules that make up the memory system is swapped, the strobe adjustment must be made to ensure system reliability (When the G110 module is swapped, it has the strobe pot but the setting cannot be taken for granted) The procedure to use for strobe adjustment is as follows:

1. If strobe adjustment is too far off, EXAM and DEP may not work. To get strobe in the ballpark, sync on pin CU2 of the G110 model (signal READ H) and Test Point 5 of E05 pin 9 for strobe. Press EXAM rapidly and adjust strobe using pot on G110 for a 250 ns delay from rising edge of READ H to rising edge of strobe. This should allow diagnostics to be read in.
2. Load Worst Case Noise Diagnostic (W.C.N. should be used not a Branch SLIF)
3. Load Address 200 and START or Load Address 202 to select the desired bank.
4. Sync on pin CU2 of G110 (signal READ H) while scoping Test Point 5 or E05 pin 9 for strobe and margin strobe by turning pot CW until the diagnostic fails and then CCW until it fails. A complete pass of the diagnostic should be made (within reasonable limits for large core systems) at each high and low end point to ensure that is the true end point. Notice the time from the leading edge of READ H to strobe in each case. The total strobe window should be 40 ns or greater and set strobe in the middle of the high and low points. If the window isn't at least 40 ns, then the entire system should be changed because margin problems can only be dealt with back at Module Repair Depot.


This procedure is graphically illustrated and explained in the ME11L, MM11-S, 11/05, and 11/40 manuals.

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator  MM 11
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	

Title MM11-K, L, M, and S Field Problem Summary (continued)				Tech Tip MM 11 Number TT 3	
All <input type="checkbox"/>	Processor Applicability		Author D. Lickhut	Rev 0	Cross Reference
			Approval C. Dewey	Date 11/20 72	

4. DEC memory stack threshold problem

Some DEC or RCA memory stacks (LL stack identified by label on side 2; some may have RCA stickers) have a threshold problem and will not exhibit the normal threshold margins. In order to use these previously rejected stacks in production, the sense circuitry on the G110 was modified. In the field, if a memory stack is swapped and it is a DEC stack, the G110 module should be checked to see if ECO 98 is installed. If it isn't and this is a non-Field effect ECO, a G110 module with that ECO should be obtained from the Maynard Module Repair Depot. The new DEC stack may or may not have this problem and probably will operate properly even if it does. However, with large systems or several NPM (DMA) devices, intermittent failures may occur over a long period of time.



Title: IDENTIFICATION FOR THE MM1K, MM1L and MM1S MEMORIES				Tech Tip Number		MM1L 17-10	
Processor Applicability				Author: G. Cable		Rev: #	
Approval: C. Dewey				Date: 12/12/72		Cross Reference	

The following Tech Tip will attempt to clarify the confusion regarding the ECO status for the MM1S, MM1K and MM1L memories.

**G110 Modules**

In the near future there will be two separate types of G110 Modules in the field. The first type of G110 Module is an Etch Revision C Module which already exists in the field. The second type of module will be an Etch Revision E.

It will not be possible to ECO the Etch Revision C Module so that it will be electrically equal to the Etch Revision E Module. For this reason it has become necessary to create two separate sets of engineering drawings to cover the two different modules.

The engineering drawings for the Etch Revision C Module will have a circuit schematic revision of E with one numeric digit following. Each ECO released will increment the numeric digit by one (i.e. E1, E2, E3, and etc.).

The engineering drawings for the Etch Revision E Module will have a circuit schematic revision of H plus character starting at F and continuing sequentially (i.e. F, H, I, J, and etc.).

Below is a chart that shows the revisions for the two G110 Modules.

G110 Etch Revision C		G110 Etch Revision E	
ECO No.	CS Revision	ECO No.	CS Revision
G110-0001	A	G110-0001	F
G110-0002	I	G110-0011	H
G110-0003	B A		
G110-0003A	B A		
G110-0004	D		
G110-0005	I		
G110-0007	E-1		
G110-0008	F-2		
G110-0009	L-3*		
G110-0010	L-4*		
G110-0012	L-5		

\*i.e. There have been a number of Etch Rev modules shipped that were marked as Rev H and I these should have been marked as Rev E3 and E4 respectively.

<b>digital</b>	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title (Continued) ECO DOCUMENTATION FOR THE MM11K, MM11L and MM11S Memories				Tech Tip Number MM11-TT-10	
Processor Applicability		Author G. Cable	Rev g	Cross Reference	
All x		Approval C. Dewey	Date 12/12/72		

G231 Module

There will also be two separate types of G231 Modules in the field in the near future. For this reason it has become necessary to create two sets of engineering drawings.

The first type of G231 Module will be an Etch Revision of C. All future ECO's for this module will use a circuit schematic revision of E with a numeric digit following. Each ECO released will increment the numeric digit by one (i.e. E4, E5, E6 and etc.).

The second type of G231 Module will be an Etch Revision of E. All future ECO's for this module will use a circuit schematic revision with only an alpha character as a designator starting at CS Revision F and incrementing thru the alphabet (i.e. F, H, J, K, and etc.).

Below is a chart that shows the revisions for the two G231 Modules.

G231 Etch Revision C			G231 Etch Revision E	
ECO No.	CS Revision	Stamped on Module	ECO No.	CS Revision
G231-0001	C	C	G231-0004	F
G231-0002	N/A	N/A		
G231-0003	C-1	E		
G231-0005	1	E-1		
G231-0006	2	E-2		
G231-0007	3	3		
G231-0008	3A	3A		
G231-0009	E4	E4		

Refer to PDP 11/05 Systems Tech Tip #14 for a detailed listing and description of memory ECO's.

Title		New MM11 Option Designations		Tech Tip Number		MM11-TT-11	
All	Processor Applicability			Author	Rev	Cross Reference	
				D. Duckert	1		
				Approval	Date		
				J. Dewey	1/19/73		

This tech tip is to define the new variations of memories that are in existence and how they differ from the present MM11-L and S memories. The MM11-L and S are defined again for reference.

MM11-L (8K X 16, 900 ns)

It consists of a G110, G231 and H214 and is used on 11/05, 11/10, ME11-L and 11/40.

MM11-S (8K X 16, 900 ns)

This consists of a G110, G231, H214, and a system unit. It is used on 11/35, 11/40 to 11/45.

MM11-LP (8K X 18, memory parity)

This consists of a G109, G231 and H215 and is designed for memory parity. It plugs into a MF11-LP.

MF11-LP (Parity Option)

This is a memory parity option that consists of a nine slot backplane, one MM11-LP and one M7259 double height double width memory parity controller. The backplane can accommodate three MM11-LP. This option is used on 11/35, 11/40 and 11/45.

MF11-L

This is a memory option that consists of a nine slot backplane and one MM11-L. It can accommodate three MM11-L and is used on 11/35, 11/40 and 11/45.


MB11-S (8K X 16)

This is a special 8K X 16 memory with a 850 ns cycle time and consists of a G110-YA, G231, and H214-YA. This memory is used only on 11/45 and exists in very limited quantities.

G109-YA (for reference only)

Module used only on PDP15 memories.

It is important to remember that the modules mentioned in the above definitions are not interchangeable with a similar looking type in another category. For example a G109 is not interchangeable with a G110 nor is a G110 interchangeable with a G110-YA. When a memory module is replaced or swapped, it should only be replaced with the exact same module type, even though another type may appear to work.

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM 11


Title MM11- E and F in BALL-B/D/F Mounting Boxes				Tech Tip MM11-TT-12 Number	
All	Processor Applicability		Author B. Dambat	Rev 0	Cross Reference
			Approval C. Dewey	Date 3/14/73	


MM11E and MM11F memories cannot be installed in the 11/40 box. They cannot be installed in BALL-B/D/F boxes. They can be used on the 11/40 system but only if they are installed in an 11/20 type box (BALL-ES), which has its own power supply.

MM11E/F's, installed in an 11/40 box, will lose data during the power down sequence.

Title		MM11 L, S, & K Memory Address Decode		Tech Tip Number		MM-TT-11	
All	Processor Applicability		Author	John Alston	Rev	0	Cross Reference
			Approval	B. Dimbat	Date	6/1/73	

The diagram and tables supplied here are to aid F/S men when they are troubleshooting MM11L, S & K memories by relating the drive signals on the G231 with the addresses that generate them.

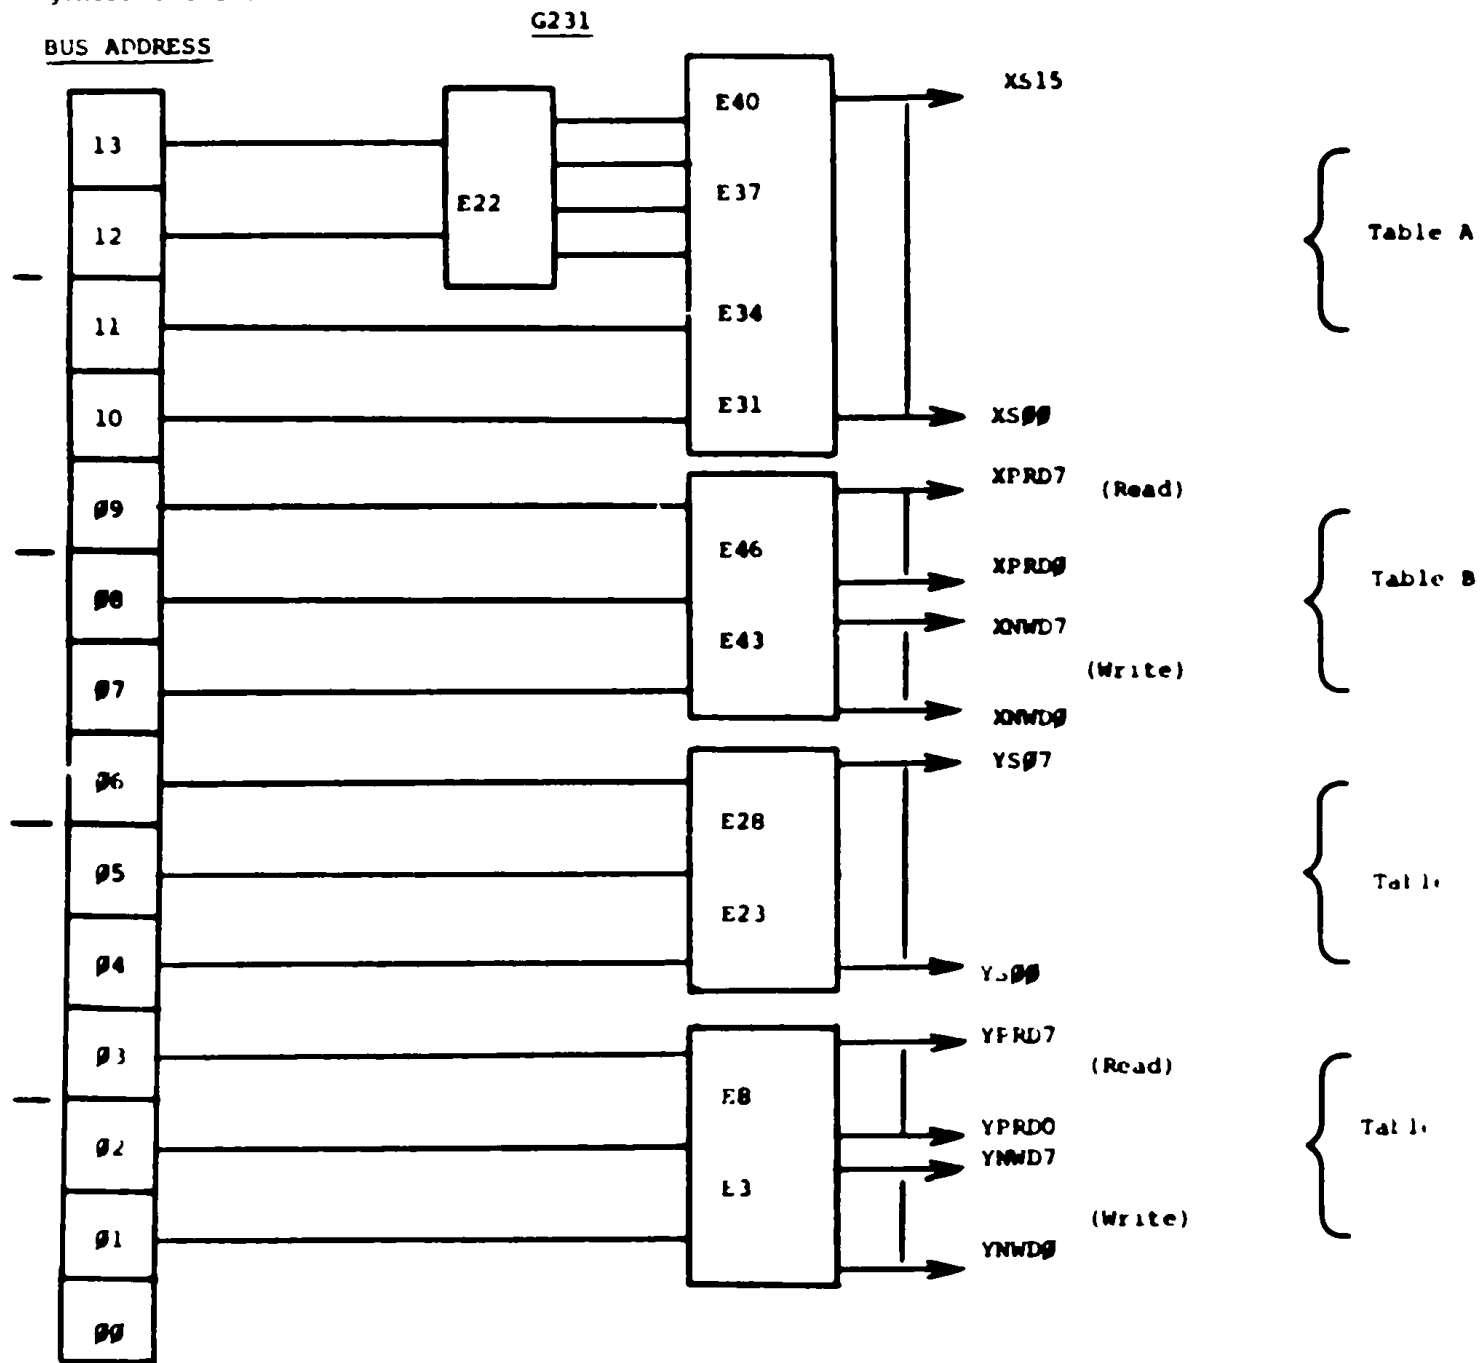

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MM11

Title MM11 I, S, K Memory Address Decode				Tech Tip Number MM11-TT-13	
All	Processor Applicability		Author J. Alston	Rev g	
			Approval B. Dimbat	Date 6/1/73	
Cross Reference					

	A11=1, A10=1	A11=1, A10=0	A11=0, A10=1	A10=0, A11=0
A13=1 A12=1	XS15	XS14	XS13	XS12
	E40			
A13=1 A12=0	XS11	XS10	XS09	XS08
	E37			
A13=0 A12=1	XS07	XS06	XS05	XS04
	E34			
A13=0 A12=0	XS03	XS02	XS01	XS00
	E31			

TABLE A

	A08=1, A07=1	A08=1, A07=0	A08=0, A07=1	A08=0, A07=0
Read Cycle	XPRL7	XI RL6	XI RD5	XI RL4
	E46			
	XPRL3	XI RL2	XI RD1	XI RD0
	E43			
Write Cycle	XNWL7	XNWL6	XNWL5	XNWL4
	E46			
	XNWL3	XNWL2	XNWL1	XNWL0
	E43			

TABLE B

E2

Title MM11, L, S, K Memory Address Decode			Tech Tip Number MM-TT 13	
All	Processor Applicability		Author I. Alston	Rev 0
			Approval I. Dimbat	Date 6/1/73
Cross Reference				

TABLE C

	A05=1, A04=1	A05=1, A04=0	A05=0, A04=1	A05=0, A04=0
A06=1	YS07	YS06	YS05	YS04
	E28			
A06=0	YS03	YS02	YS01	YS00
	E23			

TABLE D

		A02=1, A01=1	A02=1, A01=0	A02=0, A01=1	A02=0, A01=0
read	A03=1	YPRD7	YPRD6	YPRD5	YPRD4
		E8			
	A03=0	YPRD3	YPRD2	YPRD1	YPRD0
		E3			
write	A03=1	YNWD7	YNWD6	YNWD5	YNWD4
		E8			
	A03=0	YNWD3	YNWD2	YNWD1	YNWD0
		E3			

<input type="checkbox"/> 12 Bit <input checked="" type="checkbox"/> 16 Bit <input type="checkbox"/> 18 Bit <input type="checkbox"/> 36 Bit	<b>FIELD SERVICE TECHNICAL MANUAL</b>	Option or Designator MM11
		MEMORY OPTIONS

Title MM11-D/DP Memory Backplane		Tech Tip Number MM11-TT-14	
Processor Applicability All	Author William Aupperles	Rev g	Cross Reference
	Approval William Dimbar	Date 8-5-76	

The MM11-D/DP Core Memory Manual states that the G652 (mother board for the MM11-D/DP) is inserted into a "Unibus Backplane". To eliminate any confusion, the "Unibus Backplane" is the modified backplanes DD11-C, D and P used on 11/04, 11/34 systems. Other Unibus Backplanes, such as 11/05, 11/35 and DD-11B expansion backplanes are not compatible with these new memory boards.


Title MM11-U/UP MEMORIES FAILING HIGH CURRENT MARGINS		Tech Tip Number MM11-TT-15	
Processor Applicability All	Author Jim Holderby	Rev g	Cross Reference
	Approval Lee Mickle	Date 9-13-76	

Many reports have been received from the field concerning memories failing high current margins and module set incompatibility (i.e. unable to swap modules). Investigation has shown that the inhibit margins are not properly centered, which could cause marginal operation of the memory under conditions of high drive currents. An EOD (G235-0009) was generated to correct this problem.

Therefore, if a memory exhibits these symptoms, do a visual inspection of the G235 for the EOD. A quick check for the EOD is:

1. Place G235 component side up and fingers toward you.
2. Look at right hand side of module in large etch area (see drawing).
3. If resistor R103 (75Ω 1W) which is across bottom of large etch is not in, EOD has not been installed.

This EOD should be installed before attempting massive module swap or option swap.

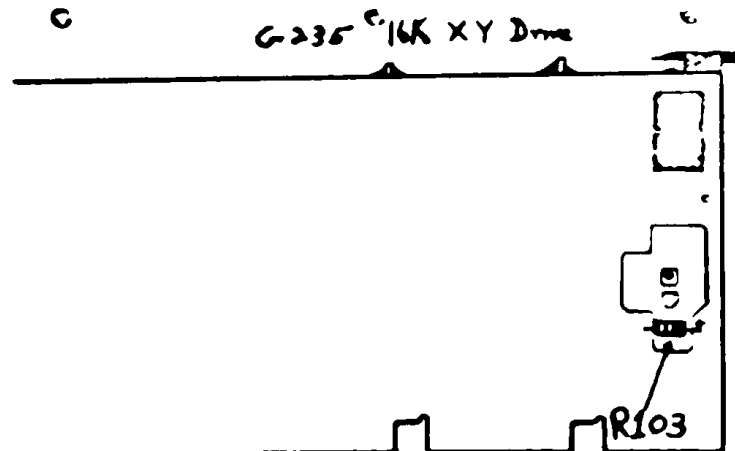

PAGE 17	PAGE REVISION C	PUBLICATION DATE JUNE 1977
---------	-----------------	----------------------------

Title MM11-U/UP INSTALLATION					Tech Tip Number MM11 TT-16	
Processor Applicability			Author Jim Holderby		Rev g	
All			Approval Lee Mickle (LM)		Date 12-14-76	
X					Cross Reference	

There is a problem if more than 64K of MM11-U memory is installed in the new type expansion box (BALLF) with power distribution harness 7009566. When the second H754 power supply is installed, the jumpers must be removed from the power harness. The jumpers connect P2 pin 3 to P5 pin 3 and P2 pin 14 to P5 pin 14. If these jumpers are not removed, the two(2) H754 power supplies are connected in parallel and it is possible to damage one or both regulators. The reason the jumpers are there is to allow us to install the memory backplane anywhere in the cabinet.

This information is not in the installation procedure; however, it can be found in the PDP 11/45 and 11/50 System Maintenance Manual (DEC-11-H45SM-D-D) Figure 8-5, power distribution schematic.

Title MM11-E TROUBLE SHOOTING AID					Tech Tip Number MM11-TT-17	
Author MICHAEL BABCOCK			FS Office PITTSBURGH, PA		Date 7 JUNE 77	
Processor Applicability			Mgr /Sup		Date	
All			Approval JIM HOLDERBY		Date 16 JUN 77	
					Revision 0	
					Cross Reference	

THE FOLLOWING IS INTENDED AS A TROUBLE SHOOTING AID FOR THE MM11-E MEMORY

ADDRESS															
MEMORY SELECT			X SWITCH READ AND WRITE			X DRIVER READ AND WRITE			Y SWITCH READ AND WRITE			Y DRIVER READ AND WRITE			BYTE SELECTION
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
			$\Phi_{10} = X50$			$\Phi_{10} = XD0$			$\Phi_{10} = Y50$			$\Phi_{10} = YD0$			
			$1_{10} = X51$			$1_{10} = XD1$			$1_{10} = Y51$			$1_{10} = YD1$			
			$2_{10} = X52$			$2_{10} = XD2$			$2_{10} = Y52$			$2_{10} = YD2$			
			$3_{10} = X53$			$3_{10} = XD3$			$3_{10} = Y53$			$3_{10} = YD3$			
			$4_{10} = X54$			$4_{10} = XD4$			$4_{10} = Y54$			$4_{10} = YD4$			
			$5_{10} = X55$			$5_{10} = XD5$			$5_{10} = Y55$			$5_{10} = YD5$			
			$6_{10} = X56$			$6_{10} = XD6$			$6_{10} = Y56$			$6_{10} = YD6$			
			$7_{10} = X57$			$7_{10} = XD7$			$7_{10} = Y57$			$7_{10} = YD7$			


X AND Y DRIVER SIGNALS ARE POSITIVE FOR READ; NEGATIVE FOR WRITE  
(i.e. YPD $\bar{0}$  FOR READ; YND $\bar{0}$  FOR WRITE)

X AND Y SWITCH SIGNALS ARE NEGATIVE FOR READ; POSITIVE FOR WRITE  
(i.e. XNS $\bar{0}$  FOR READ; XPS $\bar{0}$  FOR WRITE)

YD $\bar{0}$  - YD3 ON G226 SLOT C03  
YD4 - YD7 ON G226 SLOT F03  
YS $\bar{0}$  - YS3 ON G226 SLOT C03  
YS4 - YS7 ON G226 SLOT F03

XD $\bar{0}$  - XD3 ON G226 SLOT C02  
XD4 - XD7 ON G226 SLOT F02  
XS $\bar{0}$  - XS3 ON G226 SLOT C02  
XS4 - XS7 ON G226 SLOT F02

PAGE 18

	<b>FIELD SERVICE TECHNICAL MANUAL</b>				Option or Designator MM11
	12 Bit <input type="checkbox"/>	16 Bit <input checked="" type="checkbox"/>	18 Bit <input type="checkbox"/>	36 Bit <input type="checkbox"/>	MEMORY OPTION

Title <b>MM11-E TROUBLE SHOOTING AID (CONT)</b>			Tech Tip Number <b>MM11-TT-17</b>		
Author <b>MICHAEL BABCOCK</b>		F.S. Office <b>PITTSBURGH, Pa</b>	Date <b>6/17/77</b>	Revision <b>0</b>	
Processor Applicability		Mgr./Sup	Date	Cross Reference	
AH 11		Approval <b>JIM HOLDERBY</b>	Date <b>6/17/77</b>		

LOSS OF A BYTE - TROUBLE WITH BIT 0  
LOSS OF 1 (OCTAL) IN EVERY 20 (OCTAL) LOCATIONS - BAD Y DRIVER  
LOSS OF 20 (OCTAL) LOCATIONS IN EVERY 200 (OCTAL) LOCATIONS - BAD Y SWITCH  
LOSS OF 200 (OCTAL) LOCATIONS IN EVERY 2,000 (OCTAL) LOCATIONS - BAD X DRIVER  
LOSS OF 2000 (OCTAL) LOCATIONS IN EVERY 20000 (4K) (OCTAL) LOCATIONS - BAD X SWITCH

ANY DATA BIT DROPAGE OR PICKUP IS PROBABLY CAUSED BY THE G102'S

DATA BITS 0-3	G102 SLOT D#3
DATA BITS 4-7	G102 SLOT D#2
DATA BITS 8-11	G102 SLOT E#3
DATA BITS 12-15	G102 SLOT E#2

ADDRESS BIT 0 - BYTE SELECT DURING DATOB

ADDRESS BITS 1-3			READ DRIVER	WRITE DRIVER	
3	2	1			
0	0	0	YPD0	YND0	
0	0	1	YPD1	YND1	SWITCH/DECODER A
0	1	0	YPD2	YND2	G226 SLOT C#3
0	1	1	YPD3	YND3	
1	0	0	YPD4	YND4	
1	0	1	YPD5	YND5	SWITCH/DECODER B
1	1	0	YPD6	YND6	G226 SLOT F#3
1	1	1	YPD7	YND7	

ADDRESS BITS 4-6					
6	5	4			
0	0	0	YNS0	YPS0	
0	0	1	YNS1	YPS1	SWITCH/DECODER C
0	1	0	YNS2	YPS2	G226 SLOT C#3
0	1	1	YNS3	YPS3	
1	0	0	YNS4	YPS4	
1	0	1	YNS5	YPS5	SWITCH/DECODER D
1	1	0	YNS6	YPS6	G226 SLOT F#3
1	1	1	YNS7	YPS7	

DEC CONFIDENTIAL  
This document is proprietary to Digital Equipment Corporation and is intended for use by its Field Service Organization only  
For information on writing or approving a Tech Tip, see Administration Tech Tip Number 2

Page 19	Page Revision 0	Publication Date JUNE 1977
---------	-----------------	----------------------------

PRINTED IN U.S.A

Title MM11-E TROUBLE SHOOTING AID (CONT)				Tech Tip Number MM11-TT-17	
Author MICHAEL BABCOCK		F S Office PITTS., PA		Date 6/17/77	Revision 0
Processor Applicability		Mgr /Sup		Date	Cross Reference
All	11	Approval JIM HOLDERBY		Date 6/17/77	

**ADDRESS BITS 7-9**

9	8	7			
0	0	0	XPD0	XND0	
0	0	1	XPD1	XND1	SWITCH/DECODER A
0	1	0	XPD2	XND2	G226 SLOT C02
0	1	1	XPD3	XND3	
1	0	0	XPD4	XND4	
1	0	1	XPD5	XND5	SWITCH/DECODER B
1	1	0	XPD6	XND6	G226 SLOT F02
1	1	1	XPD7	XND7	

**ADDRESS BITS 10-12**

12	11	10			
0	0	0	XNS0	XPS0	
0	0	1	XNS1	XPS1	SWITCH/DECODER C
0	1	0	XNS2	XPS2	G226 SLOT C02
0	1	1	XNS3	XPS3	
1	0	0	XNS4	XPS4	
1	0	1	XNS5	XPS5	SWITCH/DECODER D
1	1	0	XNS6	XPS6	G226 SLOT F02
1	1	1	XNS7	XPS7	


Title M7850 S SYN DLY ADJUSTMENT (MM11-CP, MM11-DP)				Tech Tip Number MM11-TT-18	
Author JIM HOLDERBY		F S Office MAYNARD		Date 9-23-77	Revision 0
Processor Applicability		Mgr /Sup LEE MICKLE		Date 9-23-77	Cross Reference
All		Approval LEE MICKLE		Date 9-23-77	M7850-TT-1

THIS TECH TIP APPLIES TO MM11-CP AND MM11-DD. CROSS REFERENCE M7850.

MM11-E

MM11-E/F PARTS BREAKDOWN

7006405	- Logic Frame
7006468	- MM11-E Wired assembly
70007263	- MM11-F Wired assembly
G102	- Sense Inhibit Card
G103	- Memory Levels & Gates
G225	- X-Y Current Generator
G226	- X-Y Current Generator
H207	- 4K 16 Bit Core Memory Stack
M109	- Device Select
M729	- MM11-E Control Logic
M1091	- Device Select
M7290	- Control Logic & Timing
MM11-E	- 4K Single Memory Unit
MM11-EX	- 4K Interleaved
MM11-F	- 4K Single Memory Unit
MM11-FP	- Single Parity Memory Unit
MM11 FX	- Interleaved Memory (jumpers)

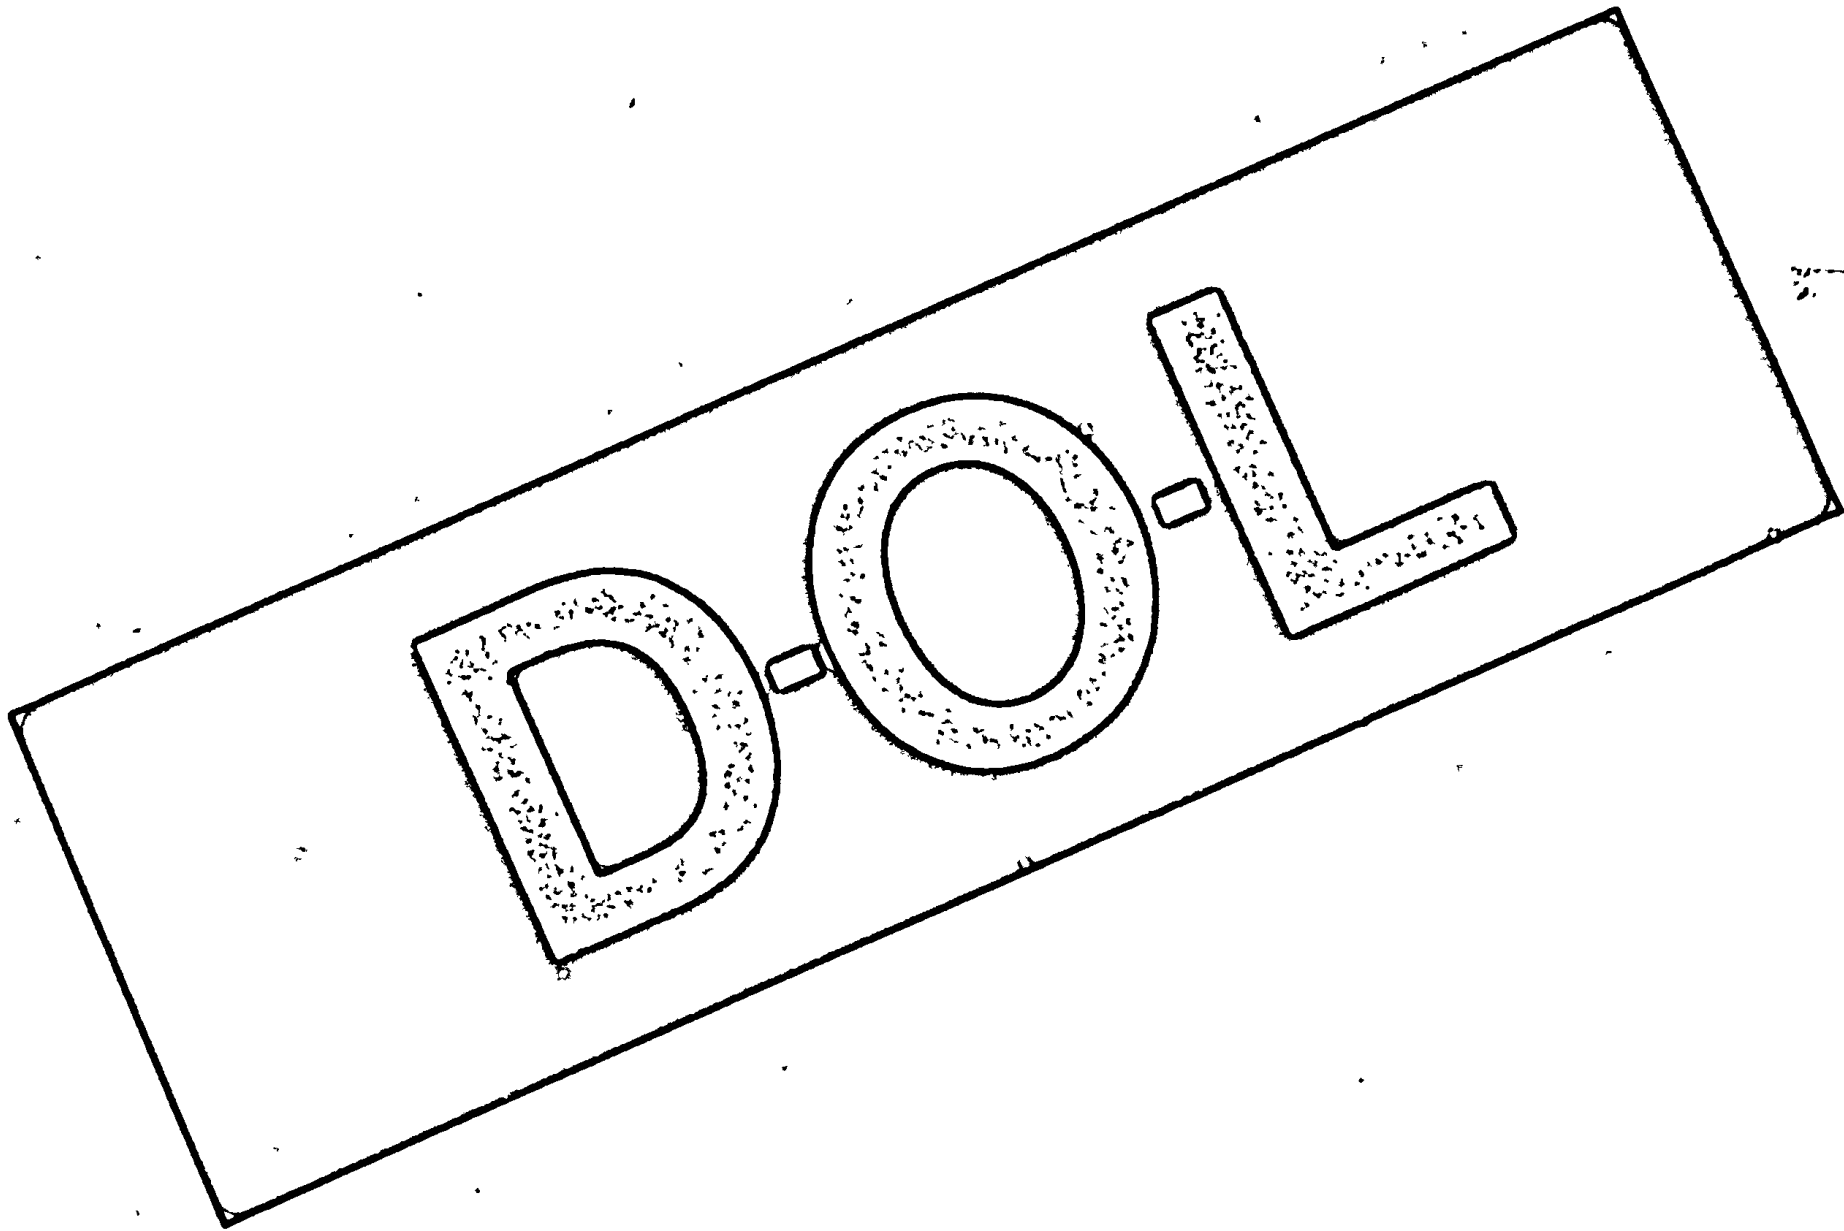

ONLY FCO'S WRITTEN TO THE "MM11-E" OPTION ARE DOCUMENTED ON THIS FICHE. FCO'S FOR THE G102, G103, G225 ARE DOCUMENTED IN THE MODULE ASSEMBLY (BLUE) SECTION OF THE LIBRARY.

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE; THEREFORE, ONLY PARTS OF IT ARE READABLE.

**Engineering Change Order Log**

ECO SYNOPSIS pages are updated and published continuously in conjunction with the issuance of ENGINEERING CHANGE ORDERS for all DEC products and are available upon subscription from:

DIGITAL EQUIPMENT CORPORATION  
FIELD SERVICE INFORMATION CENTER  
MAYNARD MASSACHUSETTS 01754

**Digital EQUIPMENT CORPORATION**  
MAYNARD MASSACHUSETTS

ECO SYNOPSIS FOR LOGIC OR OPTION

PDP-11 PERMUT **MM11-E**

PRODUCT LINE	PUBLICATION DATE OF THIS SYNOPSIS PAGE	PAGE REVISION
PDP-11	JULY 1976	4

ECO NO	LOGIC OR OPTION SERIAL NO S AFFECTED	FIELD CODE	SYNOPSIS
MM11-E 00001	MM11-E	M	JAN 70 - CHANGES STACK RISE TOLERANCE AND ADDS A FLATNESS SPECIFICATION.
MM11-E 00002	MM11-E 110-120	D	JAN 70 - MAKES CORRECTIONS TO THE WIRE LIST.
MM11-E 00003	MM11-E 110-120	D	JAN 70 - ADDS CURRENT LOOPS FOR X AND Y CURRENT MEASUREMENTS AND SCOPING. UPDATES THE LIST OF MANUALLY INSTALLED WIRING.
MM11-E 00004	MM11-E	D	JAN 70 - UPDATES THE MM11-E PRINT SET.
MM11-E 00005	N.A.	D	JAN 70 - CORRECTS A DRAWING WHICH WAS UNREAD IN REVERSE. ADDS CLARIFICATION NOTES.
MM11-E 00006	MM11-E 110-239	D	FEB 70 - ADDS TWO WIRES WHICH WERE PREVIOUSLY OMITTED FROM THE WIRE LIST.
MM11-E 00007	MM11-E	M	FEB 70 - CHANGES THE SPECIFICATION FOR THE MEMORY WIRING. SPECIFIES THE USE OF SELF EXTINGUISHING PLASTIC FOR MM11-E FABRICATION.
M729 00001	ALL M729	D	MAR 70 - REVISES SEVERAL DESIGN CONSIDERATIONS; CHANGES THE ETCH LAYOUT AND SEVERAL COMPONENTS. MODULE STATUS - UNRELEASED. M729 CIRCUIT SCHEMATIC REVISION A ETCHED BOARD REVISION B
G226 00003	G226	D	MAR 70 - ADDS DIODES TO CLAMP OUTPUT VOLTAGE SPIRES WHICH COULD EXCEED THE TRANSISTOR BREAKDOWN RATING. MODULE STATUS - UNRELEASED. G226 CIRCUIT SCHEMATIC REVISION C

**LEGEND**

F - Field to which this revision applies  
D - Design U  
P - PDP-11 or other logic change  
M - Mechanical ECO

**SYNOPSIS**

M - ECO applicable to future product line

**ECO CHARACTERS**

Changes are coded within the synopsis "84" "85" "86"  
84 - Change for fabric and standard parts only  
85 - Change for mechanical parts only  
86 - Change for all other parts - installation by DEC

NOTE: Changes are indicated by 84-86-87-88-89 on one change for ECO installation by DEC

REV	ECO NUMBER	REV	ECO NUMBER
A	MM11-E-00001		
B	MM11-E-00002		
C	MM11-E-00003		
D	MM11-E-00004		
E	MM11-E-00005		
F	MM11-E-00006		
G	PDP11-00004		

REV	ECO NUMBER	REV	ECO NUMBER
A	MM11-E-00002		
B	MM11-E-00006		

ECO NO	LOGIC OR OPTION SERIAL NO S AFFECTED	FIELD CODE	SYNOPSIS
G102 00001	PDP 11	F	MAR 70 - REPLACES THE 8881 IC WITH A 740011 TO INCREASE SPEED. THIS MODULE CANNOT BE REWORKED IN THE FIELD. (ERROR CORRECTED BY ECO G102-00003) G102 CIRCUIT SCHEMATIC REVISION B ETCHED BOARD REVISION D
G103 00001	ALL PDP 11	F	MAR 70 - REPLACES S47410 IC WITH S47410N TO INCREASE SYSTEM SPEED. THE MODULE CANNOT BE REWORKED IN THE FIELD. G103 CIRCUIT SCHEMATIC REVISION D
G102 00003	PDP 11	F	APR 70 - CORRECTS AN ERROR IN ECO G102-00001 CHANGES 100 OHM RESISTORS TO 75 OHMS. G102 CIRCUIT SCHEMATIC REVISION B ETCHED BOARD REVISION D
MM11-E 00008	MM11-E	F	APR 70 - CORRECTS DIMENSIONS ON THE ETCHED BOARD DRAWING TO MEET STANDARDS.
MM11-E 00009	N.A.	F	APR 70 - CHANGES WIRING AND TUBING REFERENCES ON THE PARTS LIST.
G103 00004	ALL PDP-11	F	APR 70 - CHANGES R17 FROM A 100 OHM THERMISTOR TO A 500 OHM THERMISTOR. G103 CIRCUIT SCHEMATIC REVISION C
G016 00001	N.A.	D	APR 70 - DELETES THE MOBILE HANDLE FROM THE G016 PARTS LIST AND ADDS IT TO THE MEMORY STACK PARTS LIST. G016 CIRCUIT SCHEMATIC REVISION D
G016 00002	G016	D	MAY 70 - INTERCHANGES THE POSITIONS OF THE WIRELIST R11 AND RESISTOR R1. G016 CIRCUIT SCHEMATIC REVISION C
MM11-E 00010	N.A.	F	MAY 70 - ADDS A MOBILE CLIP HOLDING PART NUMBER AND ITS DESCRIPTION TO THE PARTS LIST.
MM11-E 00011	MM11-E	F	MAY 70 - ADDS MM11-E ALIGNMENT PROCEDURE TO THE PRINT SET.
MM11-E 00012	MM11-E	U	MAY 70 - CHANGES A HOLE SIZE AND ADDS TWO DIMENSIONS FOR THE G016.

**LEGEND**

F - Field to which this revision applies  
D - Design U  
P - PDP-11 or other logic change  
M - Mechanical ECO

**SYNOPSIS**

M - ECO applicable to future product line

**ECO CHARACTERS**

Changes are coded within the synopsis "84" "85" "86"  
84 - Change for fabric and standard parts only  
85 - Change for mechanical parts only  
86 - Change for all other parts - installation by DEC

NOTE: Changes are indicated by 84-86-87-88-89 on one change for ECO installation by DEC

REV	ECO NUMBER	REV	ECO NUMBER
H	MM11-E-00009		
J	MM11-E-00010		
K	MM11-E-00011		

REV	ECO NUMBER	REV	ECO NUMBER

D3

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE; THEREFORE, ONLY PARTS OF IT ARE READABLE.

**Engineering Change Order Log**

ECO SYNOPSIS pages are updated and published continuously in conjunction with the issuance of ENGINEERING CHANGE ORDERS for all DEC products and are available upon subscription from:

DIGITAL EQUIPMENT CORPORATION  
FIELD SERVICE INFORMATION CENTER  
MAYNARD MASSACHUSETTS 01754

**digital EQUIPMENT CORPORATION**  
MAYNARD MASSACHUSETTS

ECO SYNOPSIS FOR LOGIC OR OPTION

PDP-11 ALARUM **MM11-E**

PRODUCT LINE	PUBLICATION DATE OF THIS SYNOPSIS PAGE	PAGE REVISION
PDP-11	APRIL 1976	-

ECO NO	LOGIC OR OPTION SERIAL NO S AFFECTED	FIELD CODE	SYNOPSIS
			REFERENCE ECO 1107-0000a
1107-0001	ALL 1107-0001-1	F	JAN 76 - CHANGES CIRCUITRY TO PROVIDE TOLERANCE FACTOR OF TWO FOR THE BRUSH AMPLIFIERS. ADDS A MORE SILENT TO BE TO PROVIDE ADEQUATE HEAT DISSIPATION. BUSH UP THESE CHANGES AND UNLESS FOR IMMEDIATE REPAIR TO THE UNIT IS TO BE PASSED TO THE FIELD. CHANGES CIRCUITRY TO PROVIDE TOLERANCE FACTOR FOR THE SEARCH DISCHARGE CIRCUITS. THIS CHANGE IS TO BE PASSED TO THE MAIN THE 1107 AND 1107-1. THE 1107-1 CAN BE REWORKED TO THE 1107.
1107-0002	ALL 1107-1	F	JUN 76 - REVISES THE VALUE OF RESISTOR R21 TO 20K TO SPEED UP THERMIZATION IN THE 1107-1 MODEL OPERATING VOLTAGE. SOLVES THE PROBLEM OF LOSS OF MEMORY DATA DURING POWER UP OR POWER DOWN.
1107-0003	1107-1	F	JUL 76 - SPECIFIES A NUMBERING OF THE 1107-1A MODULES.
1107-0004	1107-1 122-9530	F	AUG 76 - ELIMINATES CONFLICTING REFERENCES TO THE LOGS OF THE 1107 FROM THE 1107-1A LOGIC PRIOR.
1107-0005	1107-1 130-9530	F	SEP 76 - CORRECTS THE SIGNAL WIRE FROM THE PUNCH #3 TO THE 1107-1A. THE SIGNAL WIRE IS TO BE FROM THE PUNCH #3 TO THE 1107-1A. THESE CHANGES ENSURE PROPER OPERATION OF THE PUNCH FAIL OPTIC IN MULTIPLE 1107 SYSTEMS. THIS ECO MUST BE INSTALLED IN CONJUNCTION WITH ECOS 1107-0001, 1107-0002, AND 1107-0003. ABOVE AND IS APPLICABLE TO ALL MULTIPLE 1107 SYSTEMS.
1107-0006	ALL 1107-1 SHIPPED JAN 76 DEC 1976	F	APR 76 - PRINTING A COPY OF THE 1107-1A USER MANUAL AS A 1107-1A PLOW COMPATIBLE. IMPROVING THE 1107-1A USER MANUAL TO BE COMPATIBLE WITH THE 1107-1A USER MANUAL. STAPLES IN THIS MANUAL SHOULD BE REPLACED WITH PAPER STAPLES FOR REPAIR MARKING AND NON-INTERFERING WITH IT OF 1107-1A MODULES.

**LEGEND**

F = Field service only to required  
D = Design ECO  
P = Print or Draw List change  
M = Maintenance ECO

SYNOPSIS  
\* ECO applicable to future production

ECO CHANGES  
Changes are visible with the previous 1107-1A 1107-1A  
D = Change for future and customer of the 1107  
P = Change for necessary parts only  
M = Change for on and off the 1107-1A 1107-1A by DEC  
NOTE: Changes are visible 1107-1A 1107-1A 1107-1A on the change for ECO applicable to DEC

**MASTER DRAWING LIST REVISIONS**

REV	ECO NUMBER	REV	ECO NUMBER
1	1107-0001		
2	1107-0002		
3	1107-0003		
4	1107-0004		
5	1107-0005		
6	1107-0006		

**WIRE LIST REVISIONS**

REV	ECO NUMBER	REV	ECO NUMBER
1	1107-0001		
2	1107-0002		
3	1107-0003		
4	1107-0004		
5	1107-0005		
6	1107-0006		

JUN 7 1976

ECO NO	LOGIC OR OPTION SERIAL NO S AFFECTED	FIELD CODE	SYNOPSIS
1107-0007	1107-1 140-9530	F	JAN 76 - CORRECTS THE WIRE NUMBERING TO SPECIFY LOCATION FOR SIGNAL WIRE FROM P10 ON P10 TO 140-9530. ADDS 140-9530-0001 TO 140-9530-0002 TO P10 ON P10. 140-9530-0001 AND 140-9530-0002 PERFORMANCE AND 140-9530-0003 AND 140-9530-0004 AND 140-9530-0005. 140-9530-0006 AND 140-9530-0007. 140-9530-0008 AND 140-9530-0009. 140-9530-0010 AND 140-9530-0011. 140-9530-0012 AND 140-9530-0013. 140-9530-0014 AND 140-9530-0015. 140-9530-0016 AND 140-9530-0017. 140-9530-0018 AND 140-9530-0019. 140-9530-0020 AND 140-9530-0021. 140-9530-0022 AND 140-9530-0023. 140-9530-0024 AND 140-9530-0025. 140-9530-0026 AND 140-9530-0027. 140-9530-0028 AND 140-9530-0029. 140-9530-0030 AND 140-9530-0031. 140-9530-0032 AND 140-9530-0033. 140-9530-0034 AND 140-9530-0035. 140-9530-0036 AND 140-9530-0037. 140-9530-0038 AND 140-9530-0039. 140-9530-0040 AND 140-9530-0041. 140-9530-0042 AND 140-9530-0043. 140-9530-0044 AND 140-9530-0045. 140-9530-0046 AND 140-9530-0047. 140-9530-0048 AND 140-9530-0049. 140-9530-0050 AND 140-9530-0051. 140-9530-0052 AND 140-9530-0053. 140-9530-0054 AND 140-9530-0055. 140-9530-0056 AND 140-9530-0057. 140-9530-0058 AND 140-9530-0059. 140-9530-0060 AND 140-9530-0061. 140-9530-0062 AND 140-9530-0063. 140-9530-0064 AND 140-9530-0065. 140-9530-0066 AND 140-9530-0067. 140-9530-0068 AND 140-9530-0069. 140-9530-0070 AND 140-9530-0071. 140-9530-0072 AND 140-9530-0073. 140-9530-0074 AND 140-9530-0075. 140-9530-0076 AND 140-9530-0077. 140-9530-0078 AND 140-9530-0079. 140-9530-0080 AND 140-9530-0081. 140-9530-0082 AND 140-9530-0083. 140-9530-0084 AND 140-9530-0085. 140-9530-0086 AND 140-9530-0087. 140-9530-0088 AND 140-9530-0089. 140-9530-0090 AND 140-9530-0091. 140-9530-0092 AND 140-9530-0093. 140-9530-0094 AND 140-9530-0095. 140-9530-0096 AND 140-9530-0097. 140-9530-0098 AND 140-9530-0099. 140-9530-0100 AND 140-9530-0101. 140-9530-0102 AND 140-9530-0103. 140-9530-0104 AND 140-9530-0105. 140-9530-0106 AND 140-9530-0107. 140-9530-0108 AND 140-9530-0109. 140-9530-0110 AND 140-9530-0111. 140-9530-0112 AND 140-9530-0113. 140-9530-0114 AND 140-9530-0115. 140-9530-0116 AND 140-9530-0117. 140-9530-0118 AND 140-9530-0119. 140-9530-0120 AND 140-9530-0121. 140-9530-0122 AND 140-9530-0123. 140-9530-0124 AND 140-9530-0125. 140-9530-0126 AND 140-9530-0127. 140-9530-0128 AND 140-9530-0129. 140-9530-0130 AND 140-9530-0131. 140-9530-0132 AND 140-9530-0133. 140-9530-0134 AND 140-9530-0135. 140-9530-0136 AND 140-9530-0137. 140-9530-0138 AND 140-9530-0139. 140-9530-0140 AND 140-9530-0141. 140-9530-0142 AND 140-9530-0143. 140-9530-0144 AND 140-9530-0145. 140-9530-0146 AND 140-9530-0147. 140-9530-0148 AND 140-9530-0149. 140-9530-0150 AND 140-9530-0151. 140-9530-0152 AND 140-9530-0153. 140-9530-0154 AND 140-9530-0155. 140-9530-0156 AND 140-9530-0157. 140-9530-0158 AND 140-9530-0159. 140-9530-0160 AND 140-9530-0161. 140-9530-0162 AND 140-9530-0163. 140-9530-0164 AND 140-9530-0165. 140-9530-0166 AND 140-9530-0167. 140-9530-0168 AND 140-9530-0169. 140-9530-0170 AND 140-9530-0171. 140-9530-0172 AND 140-9530-0173. 140-9530-0174 AND 140-9530-0175. 140-9530-0176 AND 140-9530-0177. 140-9530-0178 AND 140-9530-0179. 140-9530-0180 AND 140-9530-0181. 140-9530-0182 AND 140-9530-0183. 140-9530-0184 AND 140-9530-0185. 140-9530-0186 AND 140-9530-0187. 140-9530-0188 AND 140-9530-0189. 140-9530-0190 AND 140-9530-0191. 140-9530-0192 AND 140-9530-0193. 140-9530-0194 AND 140-9530-0195. 140-9530-0196 AND 140-9530-0197. 140-9530-0198 AND 140-9530-0199. 140-9530-0200 AND 140-9530-0201. 140-9530-0202 AND 140-9530-0203. 140-9530-0204 AND 140-9530-0205. 140-9530-0206 AND 140-9530-0207. 140-9530-0208 AND 140-9530-0209. 140-9530-0210 AND 140-9530-0211. 140-9530-0212 AND 140-9530-0213. 140-9530-0214 AND 140-9530-0215. 140-9530-0216 AND 140-9530-0217. 140-9530-0218 AND 140-9530-0219. 140-9530-0220 AND 140-9530-0221. 140-9530-0222 AND 140-9530-0223. 140-9530-0224 AND 140-9530-0225. 140-9530-0226 AND 140-9530-0227. 140-9530-0228 AND 140-9530-0229. 140-9530-0230 AND 140-9530-0231. 140-9530-0232 AND 140-9530-0233. 140-9530-0234 AND 140-9530-0235. 140-9530-0236 AND 140-9530-0237. 140-9530-0238 AND 140-9530-0239. 140-9530-0240 AND 140-9530-0241. 140-9530-0242 AND 140-9530-0243. 140-9530-0244 AND 140-9530-0245. 140-9530-0246 AND 140-9530-0247. 140-9530-0248 AND 140-9530-0249. 140-9530-0250 AND 140-9530-0251. 140-9530-0252 AND 140-9530-0253. 140-9530-0254 AND 140-9530-0255. 140-9530-0256 AND 140-9530-0257. 140-9530-0258 AND 140-9530-0259. 140-9530-0260 AND 140-9530-0261. 140-9530-0262 AND 140-9530-0263. 140-9530-0264 AND 140-9530-0265. 140-9530-0266 AND 140-9530-0267. 140-9530-0268 AND 140-9530-0269. 140-9530-0270 AND 140-9530-0271. 140-9530-0272 AND 140-9530-0273. 140-9530-0274 AND 140-9530-0275. 140-9530-0276 AND 140-9530-0277. 140-9530-0278 AND 140-9530-0279. 140-9530-0280 AND 140-9530-0281. 140-9530-0282 AND 140-9530-0283. 140-9530-0284 AND 140-9530-0285. 140-9530-0286 AND 140-9530-0287. 140-9530-0288 AND 140-9530-0289. 140-9530-0290 AND 140-9530-0291. 140-9530-0292 AND 140-9530-0293. 140-9530-0294 AND 140-9530-0295. 140-9530-0296 AND 140-9530-0297. 140-9530-0298 AND 140-9530-0299. 140-9530-0300 AND 140-9530-0301. 140-9530-0302 AND 140-9530-0303. 140-9530-0304 AND 140-9530-0305. 140-9530-0306 AND 140-9530-0307. 140-9530-0308 AND 140-9530-0309. 140-9530-0310 AND 140-9530-0311. 140-9530-0312 AND 140-9530-0313. 140-9530-0314 AND 140-9530-0315. 140-9530-0316 AND 140-9530-0317. 140-9530-0318 AND 140-9530-0319. 140-9530-0320 AND 140-9530-0321. 140-9530-0322 AND 140-9530-0323. 140-9530-0324 AND 140-9530-0325. 140-9530-0326 AND 140-9530-0327. 140-9530-0328 AND 140-9530-0329. 140-9530-0330 AND 140-9530-0331. 140-9530-0332 AND 140-9530-0333. 140-9530-0334 AND 140-9530-0335. 140-9530-0336 AND 140-9530-0337. 140-9530-0338 AND 140-9530-0339. 140-9530-0340 AND 140-9530-0341. 140-9530-0342 AND 140-9530-0343. 140-9530-0344 AND 140-9530-0345. 140-9530-0346 AND 140-9530-0347. 140-9530-0348 AND 140-9530-0349. 140-9530-0350 AND 140-9530-0351. 140-9530-0352 AND 140-9530-0353. 140-9530-0354 AND 140-9530-0355. 140-9530-0356 AND 140-9530-0357. 140-9530-0358 AND 140-9530-0359. 140-9530-0360 AND 140-9530-0361. 140-9530-0362 AND 140-9530-0363. 140-9530-0364 AND 140-9530-0365. 140-9530-0366 AND 140-9530-0367. 140-9530-0368 AND 140-9530-0369. 140-9530-0370 AND 140-9530-0371. 140-9530-0372 AND 140-9530-0373. 140-9530-0374 AND 140-9530-0375. 140-9530-0376 AND 140-9530-0377. 140-9530-0378 AND 140-9530-0379. 140-9530-0380 AND 140-9530-0381. 140-9530-0382 AND 140-9530-0383. 140-9530-0384 AND 140-9530-0385. 140-9530-0386 AND 140-9530-0387. 140-9530-0388 AND 140-9530-0389. 140-9530-0390 AND 140-9530-0391. 140-9530-0392 AND 140-9530-0393. 140-9530-0394 AND 140-9530-0395. 140-9530-0396 AND 140-9530-0397. 140-9530-0398 AND 140-9530-0399. 140-9530-0400 AND 140-9530-0401. 140-9530-0402 AND 140-9530-0403. 140-9530-0404 AND 140-9530-0405. 140-9530-0406 AND 140-9530-0407. 140-9530-0408 AND 140-9530-0409. 140-9530-0410 AND 140-9530-0411. 140-9530-0412 AND 140-9530-0413. 140-9530-0414 AND 140-9530-0415. 140-9530-0416 AND 140-9530-0417. 140-9530-0418 AND 140-9530-0419. 140-9530-0420 AND 140-9530-0421. 140-9530-0422 AND 140-9530-0423. 140-9530-0424 AND 140-9530-0425. 140-9530-0426 AND 140-9530-0427. 140-9530-0428 AND 140-9530-0429. 140-9530-0430 AND 140-9530-0431. 140-9530-0432 AND 140-9530-0433. 140-9530-0434 AND 140-9530-0435. 140-9530-0436 AND 140-9530-0437. 140-9530-0438 AND 140-9530-0439. 140-9530-0440 AND 140-9530-0441. 140-9530-0442 AND 140-9530-0443. 140-9530-0444 AND 140-9530-0445. 140-9530-0446 AND 140-9530-0447. 140-9530-0448 AND 140-9530-0449. 140-9530-0450 AND 140-9530-0451. 140-9530-0452 AND 140-9530-0453. 140-9530-0454 AND 140-9530-0455. 140-9530-0456 AND 140-9530-0457. 140-9530-0458 AND 140-9530-0459. 140-9530-0460 AND 140-9530-0461. 140-9530-0462 AND 140-9530-0463. 140-9530-0464 AND 140-9530-0465. 140-9530-0466 AND 140-9530-0467. 140-9530-0468 AND 140-9530-0469. 140-9530-0470 AND 140-9530-0471. 140-9530-0472 AND 140-9530-0473. 140-9530-0474 AND 140-9530-0475. 140-9530-0476 AND 140-9530-0477. 140-9530-0478 AND 140-9530-0479. 140-9530-0480 AND 140-9530-0481. 140-9530-0482 AND 140-9530-0483. 140-9530-0484 AND 140-9530-0485. 140-9530-0486 AND 140-9530-0487. 140-9530-0488 AND 140-9530-0489. 140-9530-0490 AND 140-9530-0491. 140-9530-0492 AND 140-9530-0493. 140-9530-0494 AND 140-9530-0495. 140-9530-0496 AND 140-9530-0497. 140-9530-0498 AND 140-9530-0499. 140-9530-0500 AND 140-9530-0501. 140-9530-0502 AND 140-9530-0503. 140-9530-0504 AND 140-9530-0505. 140-9530-0506 AND 140-9530-0507. 140-9530-0508 AND 140-9530-0509. 140-9530-0510 AND 140-9530-0511. 140-9530-0512 AND 140-9530-0513. 140-9530-0514 AND 140-9530-0515. 140-9530-0516 AND 140-9530-0517. 140-9530-0518 AND 140-9530-0519. 140-9530-0520 AND 140-9530-0521. 140-9530-0522 AND 140-9530-0523. 140-9530-0524 AND 140-9530-0525. 140-9530-0526 AND 140-9530-0527. 140-9530-0528 AND 140-9530-0529. 140-9530-0530 AND 140-9530-0531. 140-9530-0532 AND 140-9530-0533. 140-9530-0534 AND 140-9530-0535. 140-9530-0536 AND 140-9530-0537. 140-9530-0538 AND 140-9530-0539. 140-9530-0540 AND 140-9530-0541. 140-9530-0542 AND 140-9530-0543. 140-9530-0544 AND 140-9530-0545. 140-9530-0546 AND 140-9530-0547. 140-9530-0548 AND 140-9530-0549. 140-9530-0550 AND 140-9530-0551. 140-9530-0552 AND 140-9530-0553. 140-9530-0554 AND 140-9530-0555. 140-9530-0556 AND 140-9530-0557. 140-9530-0558 AND 140-9530-0559. 140-9530-0560 AND 140-9530-0561. 140-9530-0562 AND 140-9530-0563. 140-9530-0564 AND 140-9530-0565. 140-9530-0566 AND 140-9530-0567. 140-9530-0568 AND 140-9530-0569. 140-9530-0570 AND 140-9530-0571. 140-9530-0572 AND 140-9530-0573. 140-9530-0574 AND 140-9530-0575. 140-9530-0576 AND 140-9530-0577. 140-9530-0578 AND 140-9530-0579. 140-9530-0580 AND 140-9530-0581. 140-9530-0582 AND 140-9530-0583. 140-9530-0584 AND 140-9530-0585. 140-9530-0586 AND 140-9530-0587. 140-9530-0588 AND 140-9530-0589. 140-9530-0590 AND 140-9530-0591. 140-9530-0592 AND 140-9530-0593. 140-9530-0594 AND 140-9530-0595. 140-9530-0596 AND 140-9530-0597. 140-9530-0598 AND 140-9530-0599. 140-9530-0600 AND 140-9530-0601. 140-9530-0602 AND 140-9530-0603. 140-9530-0604 AND 140-9530-0605. 140-9530-0606 AND 140-9530-0607. 140-9530-0608 AND 140-9530-0609. 140-9530-0610 AND 140-9530-0611. 140-9530-0612 AND 140-9530-0613. 140-9530-0614 AND 140-9530-0615. 140-9530-0616 AND 140-9530-0617. 140-9530-0618 AND 140-9530-0619. 140-9530-0620 AND 140-9530-0621. 140-9530-0622 AND 140-9530-0623. 140-9530-0624 AND 140-9530-0625. 140-9530-0626 AND 140-9530-0627. 140-9530-0628 AND 140-9530-0629. 140-9530-0630 AND 140-9530-0631. 140-9530-0632 AND 140-9530-0633. 140-9530-0634 AND 140-9530-0635. 140-9530-0636 AND 140-9530-0637. 140-9530-0638 AND 140-9530-0639. 140-9530-0640 AND 140-9530-0641. 140-9530-0642 AND 140-9530-0643. 140-9530-0644 AND 140-9530-0645. 140-9530-0646 AND 140-9530-0647. 140-9530-0648 AND 140-9530-0649. 140-9530-0650 AND 140-9530-0651. 140-9530-0652 AND 140-9530-0653. 140-9530-0654 AND 140-9530-0655. 140-9530-0656 AND 140-9530-0657. 140-9530-0658 AND


FECO'S





DWG LOC.  
B-6

B-4

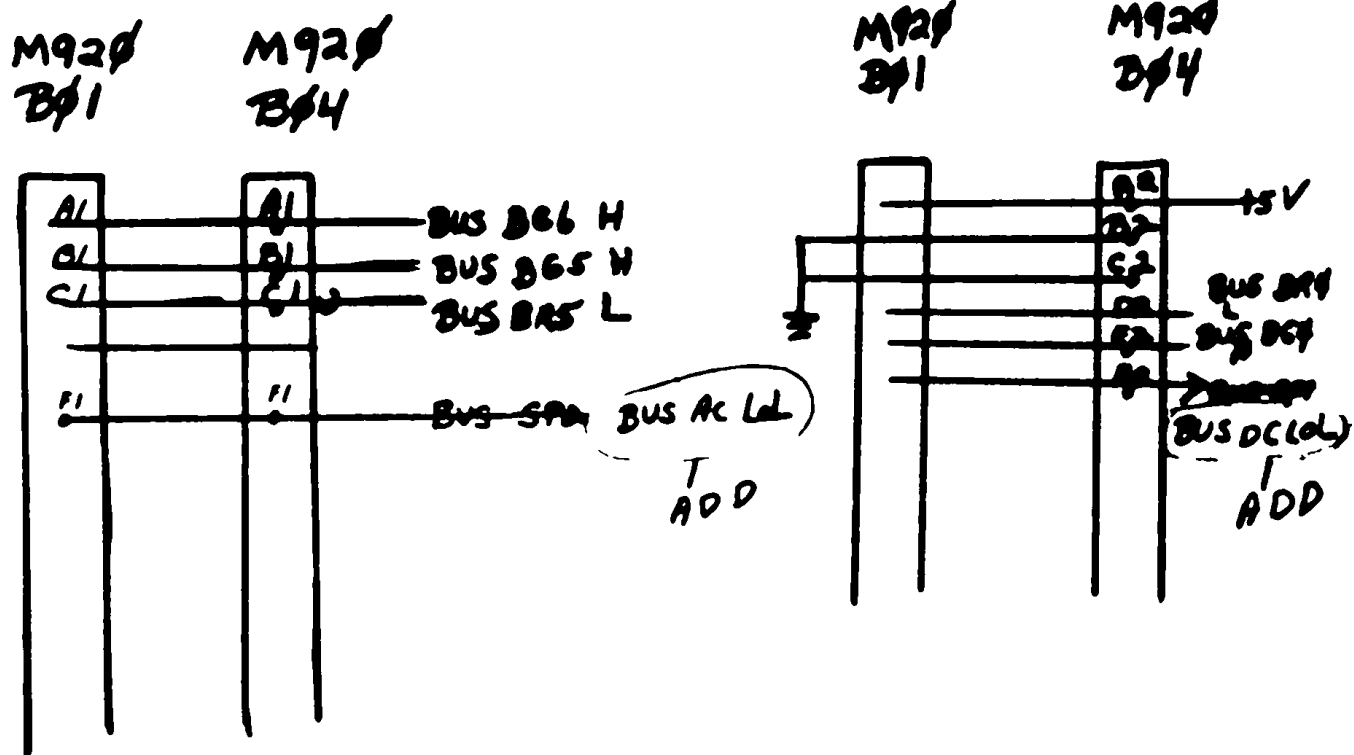

ECO # MM11E-00015

D-2C-MM11-E-09

NEW  
REV.  
A

DWG NO	REV LET	NO OF SHEETS	TITLE
D-IC-MM11-E-09	A	1	I/O CONNECTORS
K-WL-M11-E-07	B C	<del>1</del>	WIRE LIST


ECO # MM11E-00015

A-ML-MM11E


NEW  
REV.  
P




DWG LOC.  
D-4

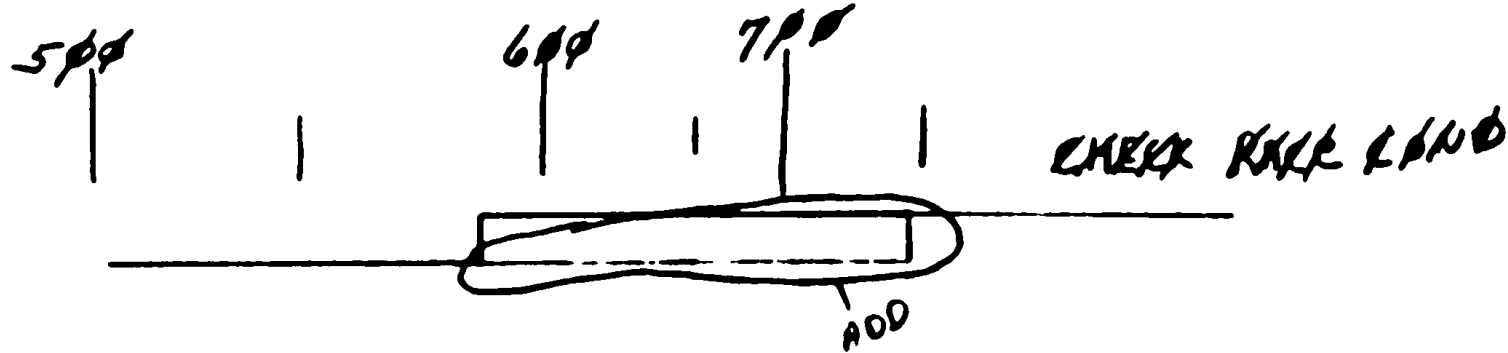


C 4+3

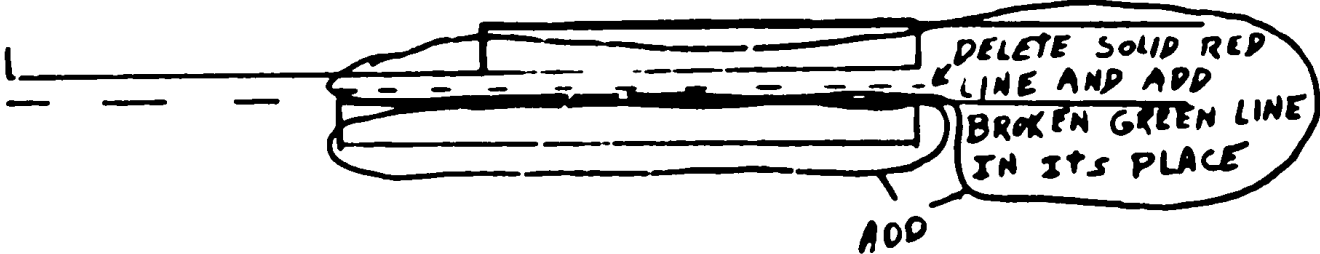


B-5

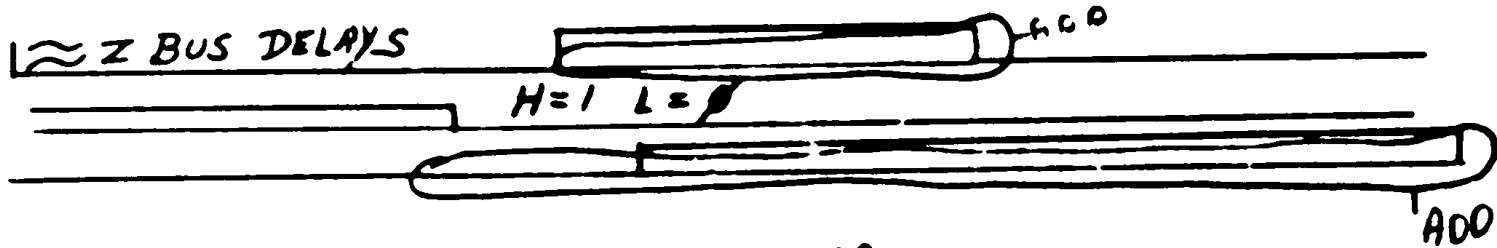

B-5+6

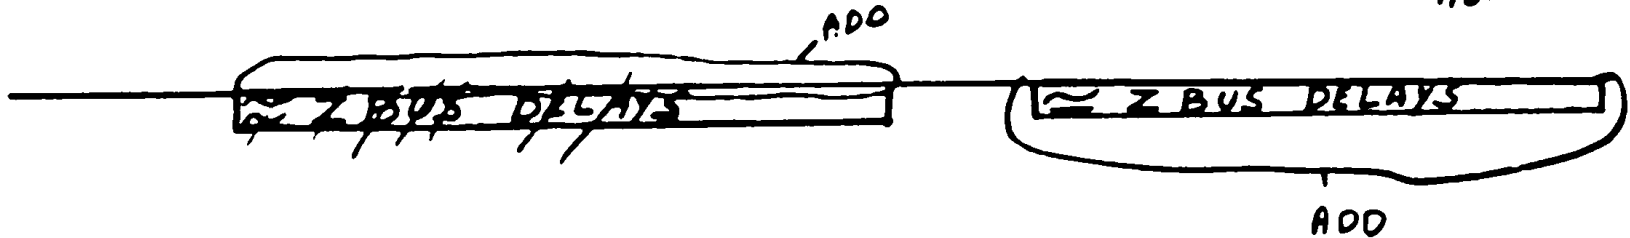

LENGTH SHOULD BE A MAXIMUM OF 2 1/4 INCHES. CHECK DRAWINGS FOR LENGTH AND FOR HOW LOOPS SHOULD BE DRESSED INTO LOGIC.

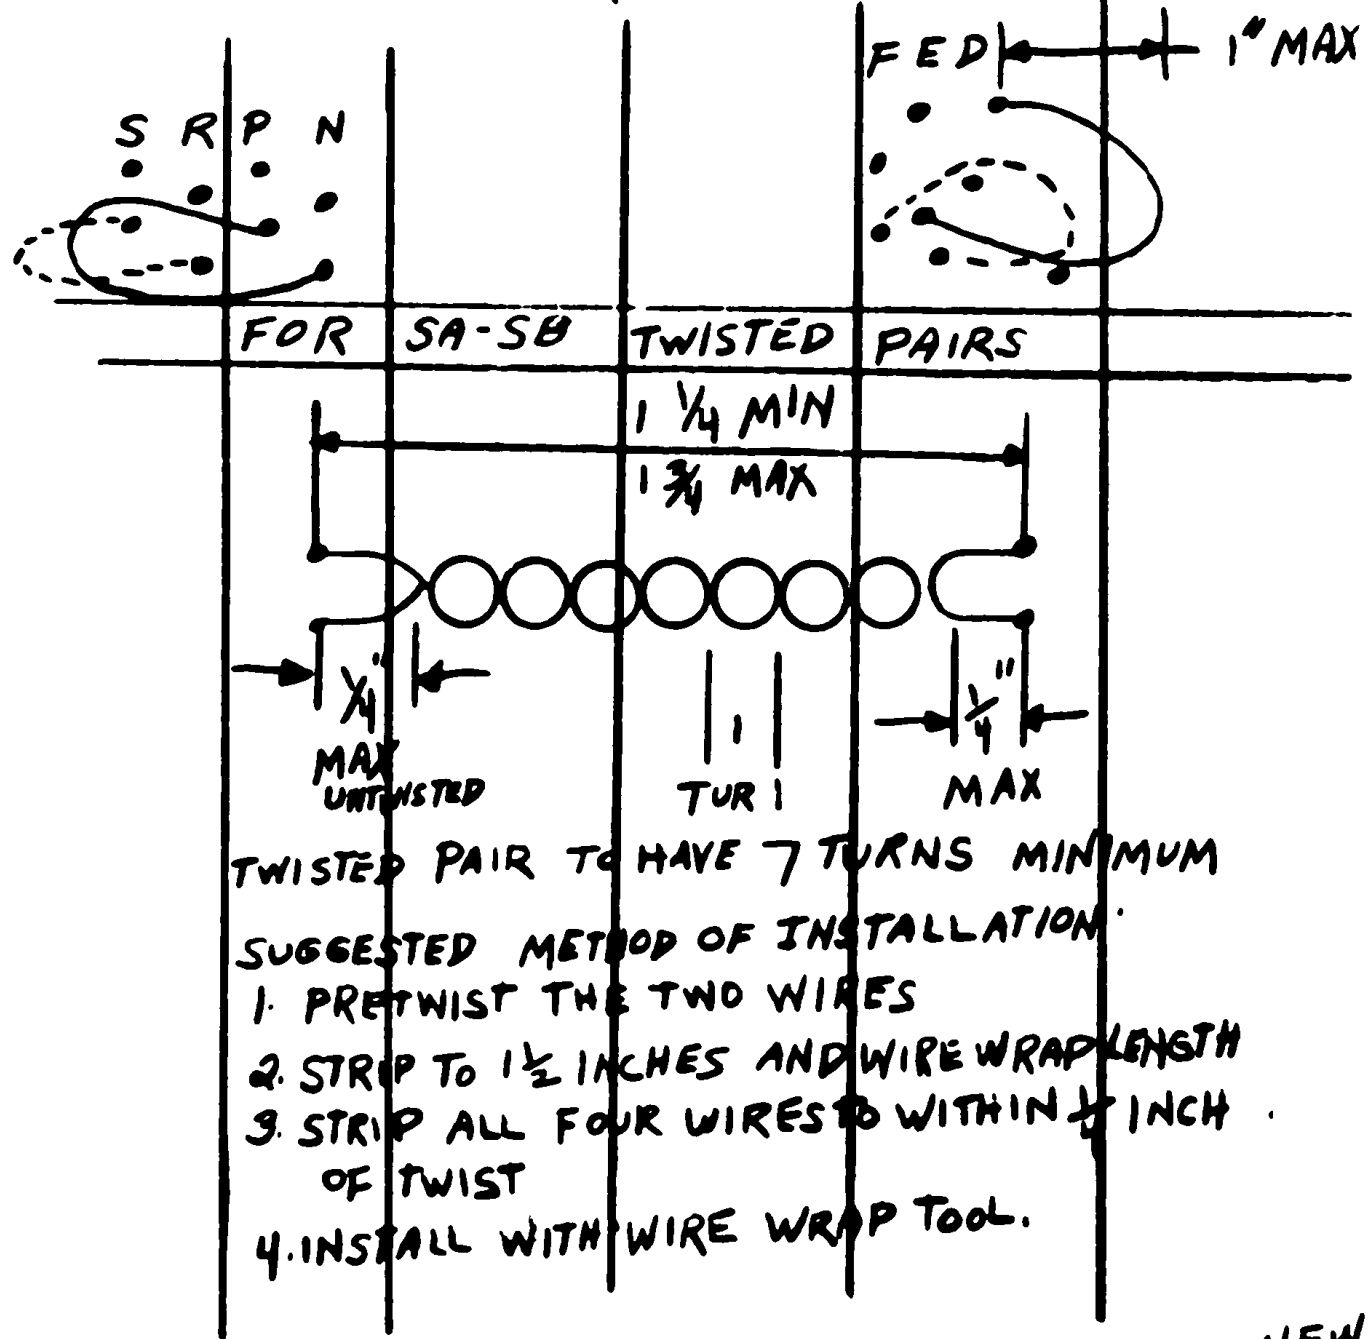

ECO# MM11E-00016 D-AD-7006468-0-0

NEW  
REV  
C

DWG NO.	REV LET
D-AD-7006468-0-0	BC
A-PL-7006468-0-0	BC
D-TD-MM11E-08	AB

ECO# MM11E-00016

A-ML-MM11E

NEW  
REV.  
N

<b>ENGINEERING CHANGE ORDER</b>		ECO NO. MM11E-00017 Sheet 1 of 4
ORIGINATOR RICHARD MANION	RECEIVED CHG. DATE 12/22/70	ISSUED ECO DATE 1-22-71
DATE EXT. 12/15/70 2005	FINAL RELEASE DATE	
DISCRETE PROJECT NUMBER 11 07602		
<b>EQUIPMENT AFFECTED</b>		
<b>TYPE CHANGE</b> ELECTRICAL <input checked="" type="checkbox"/> MECHANICAL <input type="checkbox"/> MODULE <input type="checkbox"/> SUBASSEMBLY <input type="checkbox"/> MFG/FIELD PROCEDURE <input type="checkbox"/> <b>TEST INFORMATION</b> SERIAL # _____ BY _____	<b>UNIT TO BE CHANGED</b> MM11-E <b>PRODUCT LINES</b> PDP11	<b>CHECKLIST</b> SHOP MODEL <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO SYSTEMS PROGRAMS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO DIAGNOSTICS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO TECHNICAL PUB <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO TEST PROGRAMS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO TESTER <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO MFG/FIELD PROCEDURE <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO PACKAGING INSTRUCTIONS <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO TOOLING <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
<b>BREAK IN POINT</b>		<b>SIGNIFICANCE</b>
SYSTEM	MODULE/OPTION MM11-E	FIELD RETROFIT DISTRIBUTED FOR FIELD SERVICE INFORMATIC./ ONLY
		REWORK CODE 05
		REQ. TO MEET SPECIFICATION <input type="checkbox"/> PROD IMPROVEMENT <input checked="" type="checkbox"/> CUSTOMER/FIELD REQ. <input type="checkbox"/> FACILITATE MFG. <input type="checkbox"/> DRAWING CORRECTION <input checked="" type="checkbox"/> VENDOR <input type="checkbox"/>
<b>PROBLEM</b>		
1. WANTED TO IMPROVE MEMORY PERFORMANCE. STROBE 210 NS WAS TOO EARLY FOR OPTIMUM PERFORMANCE. SOME TIMES CURRENT WAS TOO HIGH FOR OPTIMUM PERFORMANCE WHEN ADJUSTING THE REFERENCE VOLTAGE 2. WIRE LIST WAS NOT CHANGED ACCORDING TO ECO # MM11E-00015. 3. BLOCK SCHEMATIC DOES NOT REFLECT CHANGES OF M729 CIRCUIT SCHEMATIC 4. TIMING AND FLOW DIAGRAM NEEDS TO BE UPDATED. 5. WRITING IN MARGIN		
<b>CORRECTION</b>		
1. CHANGED TEST PROCEDURE TO IMPROVE MEMORY PERFORMANCE. 2. CORRECT WIRE LIST ACCORDING TO SUBMITTED ADD/DELETE SHEET. 3. UPDATE BLOCK SCHEMATIC PER ATTACHED MARKED UP PRINT. 4. UPDATE TIMING AND FLOW DIAGRAM AS INDICATED. 5. REMOVE WRITING FROM MARGIN.		
<b>APPROVAL</b>		
DESIGN ENGINEER <u>P. DURANT</u>	ENG MGR _____	FIELD SERVICE (ADVISORY) <u>J. BUZYNSKI</u>
PRODUCTION ENGINEER <u>S. CALL</u>	CHIEF ENGINEER _____	

**ENGINEERING CHANGE ORDER  
DOCUMENT & MATERIAL  
CHANGE**

ECO NO.  
MM11E-00017  
Sheet 2 of 4

ITEM	DOCUMENT/OR PART NUMBER	OLD REV	NEW REV	(PART NAME) DESCRIPTION OF CHANGE	DISP CODE
1	A-ML-MM11-E	P	R	(MASTER LIST) UPDATE REVISION LEVEL ON THE FOLLOWING DRAWINGS: D-BS-MM11-E-05 FROM A TO B K-WL-MM11-E-07 FROM C TO D D-TD-MM11-E-08 FROM B TO C A-SP-MM11-E-11 FROM O TO A	06
2	D-BS-MM11-E-05	A	B	(BLOCK SCHEMATIC) SEE MARKED PRINT THIS ECO.	06
3	K-WL-MM11-E-07	C	D	(WIRE LIST) SEE ADD/DELETE SHEET THIS ECO.	06
4	D-TD-MM11-E-08	B	C	(TIMING DIAGRAM) DELETE CHECK RACE COND. IN MARGIN. INCREASE TIME AND FLOW IN DISZ BEFORE 650NS. INCREASE TIME AND FLOW IN CINZ BEFORE 350 NS.	06
5	A-SP-MM11-E-11	-	A	(ENGINEERING SPECIFICATION) DELETE FROM PARA. 11.0 210 NS . ADD 220NS. ADD TO PARA. 13.4- IF THE MARGIN IS GREATER THAN 1.0V SET VXY AT 0.5 BELOW THE FAILING HIGH END POINT (EXAMPLE IF MARGINS ARE 0.4 TO 1.8V, SET AT 1.3V= 1.8-0.5)	06


**DISPOSITION CODES**

Use up Present Stock	01	Retrofit to Break in	05
Use Present Stock until New Stock Available	02	Documentation Change Only	06
Rework all Material	03	New Item Purchase	07
Rework until New Stock Available	04	New Item in Stock	08
		New Item on Order	09
		Retain	00

DRA 112A

SEE REVERSE SIDE FOR INSTRUCTIONS



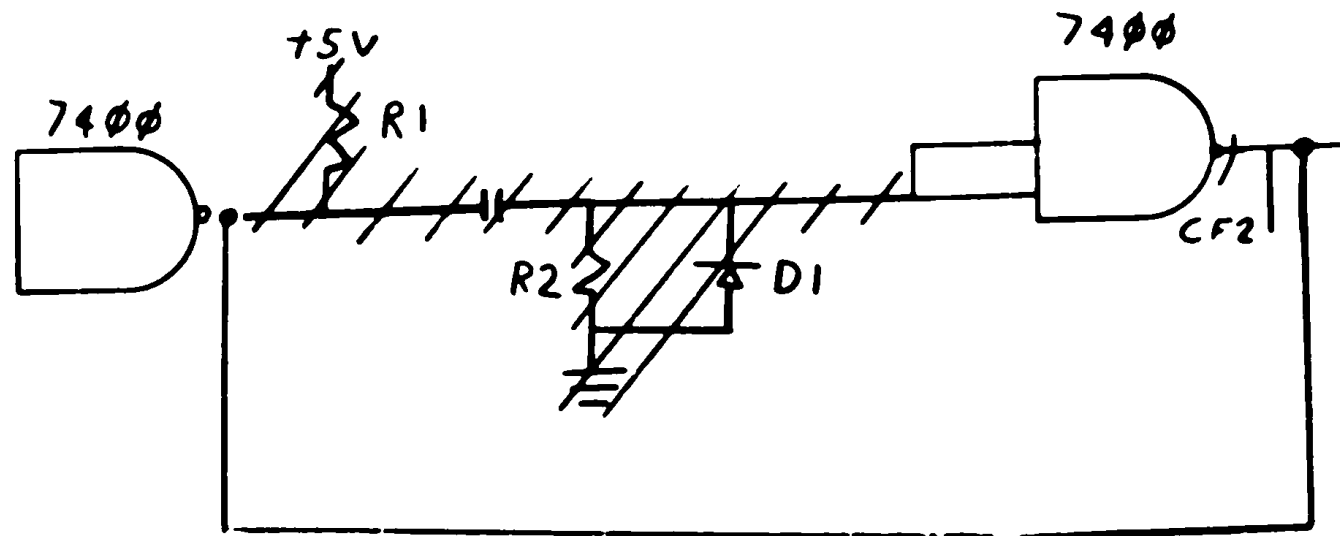

ECO\* MM1E-00017

D-BS-MM1E-05

NEW  
REVB

**ENGINEERING CHANGE ORDER**

ECO NO  
MM11E-00020  
Sheet 1 of 3

<b>ORIGINATOR</b> RICHARD MANTON	<b>RECEIVED CHG. DATE</b> 3/24/71	<b>ISSUED ECO DATE</b> 3-26-71	<b>FINAL RELEASE DATE</b> 4-13-71	<b>DISCRETE PROJECT NUMBER</b> 11 07602
DATE 3/9/71	EXT 2005			

**EQUIPMENT AFFECTED**

<b>TYPE CHANGE</b>	<b>UNIT TO BE CHANGED</b>	<b>CHECKLIST</b>	<b>YES</b>	<b>NO</b>
ELECTRICAL <input checked="" type="checkbox"/>	MM11E	SHOP MODEL	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MECHANICAL <input type="checkbox"/>	PRODUCT LINES	SYSTEMS PROGRAMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MODULE <input type="checkbox"/>		DIAGNOSTICS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SUBASSEMBLY <input type="checkbox"/>	PDP11	TECHNICAL PUB	<input type="checkbox"/>	<input checked="" type="checkbox"/>
MFG/FIELD PROCEDURE <input type="checkbox"/>		TEST PROGRAMS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<b>TEST INFORMATION</b>		TESTER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SERIAL #		MFG/FIELD PROCEDURE	<input checked="" type="checkbox"/>	<input type="checkbox"/>
BY		PACKAGING INSTRUCTIONS	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		TOOLING	<input type="checkbox"/>	<input checked="" type="checkbox"/>

<b>BREAK IN POINT</b>				<b>SIGNIFICANCE</b>	
SYSTEM	MODULE/OPTION	FIELD	REWORK	CODE	
FIELD SERVICE	MM11E	DISTRIBUTED FOR FIELD SERVICE INFORMATION ONLY		06	REQ TO MEET SPECIFICATION <input type="checkbox"/>
					PROD IMPROVEMENT <input checked="" type="checkbox"/>
					CUSTOMER/FIELD REQ <input type="checkbox"/>
					FACILITATE MFG <input type="checkbox"/>
					DRAWING CORRECTION <input checked="" type="checkbox"/>
					VENDOR <input type="checkbox"/>

**PROBLEM**

- 1) WANTED TO IMPROVE MEMORY PERFORMANCE. STROBE AT 220 NS AS SUGGESTED IN ECO MM11E-00017 WAS TOO LATE FOR OPTIMUM PERFORMANCE
- 2) PAR 12.0 MM11E TEST PROCEDURE INCORRECT. V THRESHOLD SET TO -5.3V IS TOO LOW.

**CORRECTION**

- 1) CHANGE STROBE SETTING AS STATED IN PARAGRAPH 11.0 FROM 220 NS TO 210 NS
- 2) CHANGE TEST PROCEDURE . SET V THRESHOLD AT -5.2V

NOTE: REF. ECO MM11E-00017 PROBLEM 1. IF THE CORRECTION FOR PROBLEM (1) IN ECO MM11E-00017 WAS NOT PERFORMED IT WILL NOT BE NECESSARY TO IMPLEMENT CORRECTION (1) OF THIS ECO.

**APPROVAL**

DESIGN ENGINEER P. DURANT 3/2/71      ENG MGR \_\_\_\_\_

PRODUCTION ENGINEER DON CALL 3/3/71      FIELD SERVICE \_\_\_\_\_

CHIEF ENGINEER \_\_\_\_\_      (ADVISORY) J. BUZYNSKI

DRA 111A      SEE REVERSE SIDE FOR INSTRUCTIONS

ITEM	DOCUMENT OR PART NUMBER	OLD REV	NEW REV	(PART NAME) DESCRIPTION OF CHANGE	DISP CODE
1	A-ML-MM11-E	T	U	(MASTER LIST) UPDATE REVISION LEVEL OF ITEM 3 THIS ECO	06
2	A-ML-MM11-EX	-	A	(MASTER LIST) SAME CHANGE AS ITEM 1 THIS ECO	06
3	A-SP-MM11E-11	A	B	(TEST PROCEDURE) SHEET 4 OF 5: DELETE 220 NS IN PARAGRAPH 11.0 ADD 210 NS DELETE -5.3V IN PARAGRAPH 12.0 ADD -5.2V UPDATE REVISION LEVEL ON ALL SHEETS	06

DISPOSITION CODES

- |   |    |                           |    |
|---|----|---------------------------|----|
| Use up Present Stock                        | 01 | Retrofit to Break-in      | 05 |
| Use Present Stock until New Stock Available | 02 | Documentation Change Only | 06 |
| Rework all Material                         | 03 | New Item Purchase         | 07 |
| Rework until New Stock Available            | 04 | New Item in Stock         | 08 |
|   |    | New Item on Order         | 09 |
|   |    | Retain                    | 00 |

SEE REVERSE SIDE FOR INSTRUCTIONS

FIELD SERVICE NOTES:

ECO MM11E-00020  
Page 3 of 3

**C** LEVEL OF URGENCY code

The ECO number will be posted to the EDP file with this LOU code replacing the lead # - "A" = Mandatory, High Priority  
"B" = Mandatory "C" = Applicable if symptoms are present  
"D" = Low Priority "D" = Product Improvement, Optional

**Yes** This ECO is NO CHARGE TO CUSTOMER - All DEC installation labor and materials are to be reported under a "W" charge code.

**No** This ECO is STANDARD APPLICABILITY - It is to be installed at no charge for warranty and maintenance contract customers in accordance with the technical effectivity, otherwise at customer expense.  
Charges - Documentation \$ N/C, Parts \$ NONE  
DEC on-site labor \$ N/C. (minimum per call billing applies)  
(\* parts prices not available at the time of Speco release)

**F** FIELD DISTRIBUTION CODE

"F" = Immediate Speco distribution to all field offices  
"DF" = No general Speco distribution, only to offices where equipment is located (less than 25 units in the field)

**No** UNCONDITIONAL ECO - General distribution kits will include Field Installation Orders, Specos, Prints, and Parts.

**Yes** CONDITIONAL ECO - General distribution will include Field Installation Orders only. Prints and parts must be ordered from PSIC as required.

**No** Parts availability delay expected \_\_\_\_\_.

**Yes** The REQUIREMENT TO MEET SPECIFICATION is applicable retroactively to equipment in the field.

NOTE:



ENGINEERING  
CHANGE ORDER 8527

ORIGINATOR Richard Manion *S-2*  
TEL EXT 2005 DATE 3/13/72  
DESC PROJ NO. 11 07602  
COST CENTER NO. 392 *A.F.*

ECO NO. *MM11E-00022*  
SHEET 1 OF 3  
DATE RECEIVED 3-16-72  
FIRST ISSUE 3-24-72  
FINAL ISSUE

**PROBLEM**  
Under some conditions when other options are placed along side an MM11/E they fail to operate correctly.

UNIT TO BE CHANGED  
MM11/E  
Memory  
DISP CODE ~~7X~~  
OPTIONS AFFECTED

**CORRECTION**  
Install a module protection plate.

MM11/E

**BREAK-IN/EFFECTIVITY**  
\*Install module protection plate only when problems occur.

PRODUCT LINES AFFECTED  
PDP11/20

ITEM NO	DOCUMENT/PART NO	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE	DOCUMENTATION AFFECTED	FIELD SERVICE AFFECTED	TYPE OF CHANGE
1.	C-DI-MM11-E-01	D	E	06	(Drawing Index Memory) Change per this ECO.	<input type="checkbox"/> MODEL <input type="checkbox"/> DIAGNOSTICS <input type="checkbox"/> TECH MANUAL <input type="checkbox"/> TESTER <input type="checkbox"/> TEST PROG <input type="checkbox"/> TOOLING <input type="checkbox"/> PKG INST <input type="checkbox"/> ENG SPEC <input type="checkbox"/> PURCH SPEC	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> Customer Change <input checked="" type="checkbox"/> Product Line Change	<input type="checkbox"/> ELECTRICAL <input checked="" type="checkbox"/> MECHANICAL <input type="checkbox"/> MODULE ORDER PR MODEL <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
2.	7408490	-	-	07	(Module Protection Plate) Add quantity of 1 to drawing index.			
3.	A-ML-MM11-E	V	W	06	Update per item 1.			

- DISPOSITION CODES**
- 00 - RETURN TO STOCK
  - 01 - (DELETED)
  - 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
  - 03 - REWORK IMMEDIATELY (RETROFIT)
  - 04 - (DELETED)
  - 05 - (DELETED)
  - 06 - DOCUMENT CORRECTION
  - 07 - NEW ITEM (THIS ASSEMBLY)
  - 08 - NEW ITEM (THIS COMPANY)
  - 09 - SCRAP IMMEDIATELY


**APPROVAL SIGNATURES**

Typewritten Name Signature  
 DESIGN ENGR Pete Durant *Pete Durant*  
 ENG MGR (OPT) \_\_\_\_\_  
 FIELD SERVICE (OPT) \_\_\_\_\_  
 CHIEF ENGR (MODULES ONLY) *[Signature]*

ECO MM11E-00022  
MM11E REWORK SHEET

SHEET 2 OF 2

1. LOOSEN 2 SCREWS AT POINTS A, CARE SHOULD BE USED AT ALL TIME SO, THAT NO WIRES WILL BE DAMAGED.
2. SLIDE THE FINGERS OF THE MODULE PROTECTION PLATE UNDER THE GND LUGS. THE PROTECTION PLATE SHOULD BE RIGHT AGAINST THE WIRED ASSY. FRAME, POINTS B.
3. TIGHTEN SCREWS.

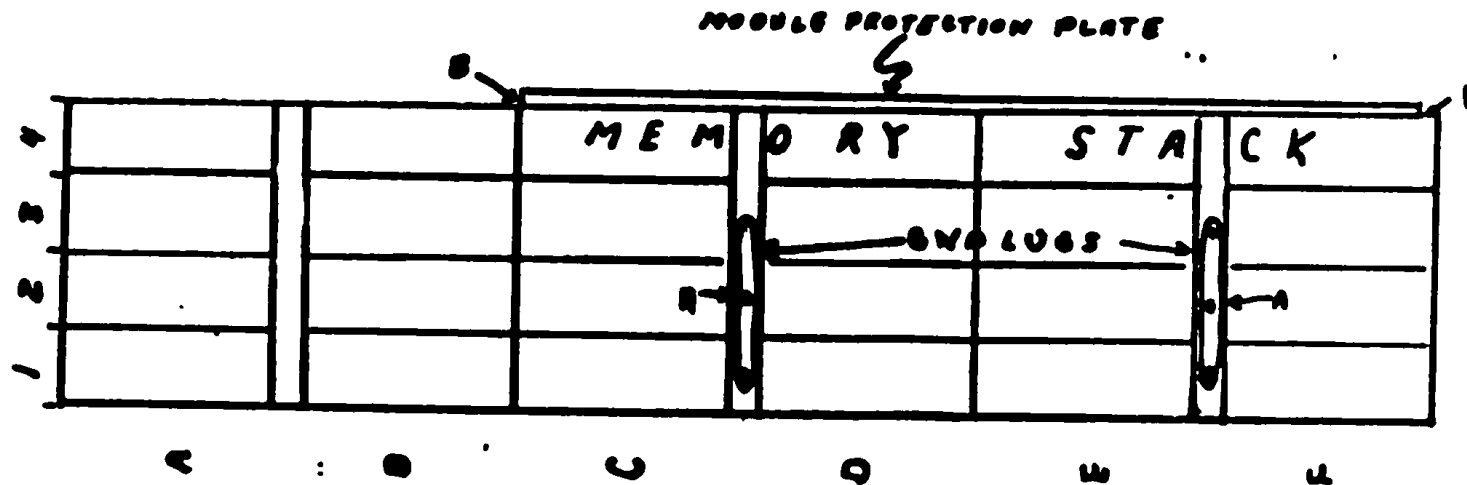

<p>ENGINEERING CHANGE ORDER</p>	TITLE	DWG NO	REV
	JRN <i>ALYCE FURTADO</i>		
	CHK'D <i>Catt</i>	DWG LOC	GRAPHIC DESCRIPTION



# FIELD CHANGE ORDER

FCO MM1E - D 0022  
PAGE 3 OF 3

DATA PROCESSING AND DEC-ECO-LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO.

### FIELD EFFECTIVITY

**MM1-E Memory Assembly**

FIELD RETROFIT IS ANTICIPATED IN 5 % OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER - ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE

STANDARD APPLICABILITY - THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE OTHERWISE AT CUSTOMER EXP. 46

DOCUMENTATION 8 PARTS 8 DEC ON-SITE LABOR 8

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.

### FIELD OFFICE FCO DISTRIBUTION CODE

F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES  
 DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED

### FCO KIT DISTRIBUTION

PSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE

~~FCO KIT DISTRIBUTION~~ FCO KITS AS DEFINED BELOW MAY BE ORDERED AS FEATURED.

### CONTENTS OF AN PSIC INITIATED KIT

FIO	FCO	PRINTS	PARTS

PSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES

### CONTENTS OF A FIELD ORDERED KIT

FIO	FCO	PRINTS	PARTS
	X	X	X

D	H	K	W
---	---	---	---

PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN. FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST.

### INSTALLATION AND TEST PROCEDURES

- Carefully install module protection plate per FCO instructions. This requires insertion of the plate under existing wire runs which are easily broken.
- Run maindecs or other programs whose failure indicated the need for this FCO to be implemented. They should now function correctly.

### LEVEL OF URGENCY CODE

- A MANDATORY HIGH PRIORITY
- B MANDATORY
- C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- E PRODUCT IMPROVEMENT - OPTIONAL - LOW PRIORITY

### DISCRETE PRODUCT NUMBER (FOR FIELD SERVICE REPORTING)

AVAILABILITY DELAY None NO PARTS

ESTIMATED DOWNTIME FOR INSTALLATION AND TESTING 1.0 HOURS

SPECIAL TEST EQUIPMENT, TOOLS, OR SUPPLIES

LAST PREVIOUS FCO'S C020, C016, 015

RELATED OR PREREQUISITE FCO'S

- MAINDEC CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

VERIFICATION MAINDECS

### PARTS REQUIRED

Q1 74-08490 Module Protection Plate

### NOTES

FIELD SERVICE APPROVAL  
Charles Dewey

*ask*

3/20 3/24 (0) 3/24 75

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE; THEREFORE, ONLY PARTS OF IT ARE READABLE.

**ENGINEERING CHANGE ORDER**

ORIGINATOR R. Manion 1-3  
 TEL EXT 2005 DATE 5-6-72  
 DBC PROJ NO. D-96-6122  
 COST CENTER NO. 392

A.F.

ECO NO. MM11-E-0024  
 SHEET        OF         
 DATE RECEIVED 5-9-72  
 FIRST ISSUE 5-10-72  
 FINAL ISSUE 6-24-72

**PROBLEM** 1. STROBE Signals and TINH have too much noise on them.  
 2. Read H signal has too many loads on it.

UNIT TO BE CHANGED  
 MM11-E

DESP CODE 03

**CORRECTION**  
 1. Install twisted pairs for these signals.  
 2. Develop another Read H signal to share the load.

OPTIONS AFFECTED

MM11-E

**BREAK-IN/EFFECTIVITY** All MM11-E's shipped after May 12 will have this ECO.  
 Rework M729 Module when necessary, all MM11E's with this  
 ECO, MUST have M729's with ECO # 2.

PRODUCT LINES AFFECTED

PDP-11/45  
 PDP-11/20  
 PDP-11/45

ITEM NO.	DOCUMENT/PART NO.	OLD REV	NEW REV	DESP CODE	DESCRIPTION OF CHANGE	DOCUMENTATION AFFECTED	FIELD SERVICE AFFECTED	TYPE OF CHANGE
1	K-WL-MM11-E-07	D	E	06	Wire List Update	<input type="checkbox"/> MODEL	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO	<input checked="" type="checkbox"/> ELECTRICAL
2	D-AD-7006468-0-0	D	E	06	Wire Ass'y MM11-E See final release print.	<input type="checkbox"/> DIAGNOSTICS	<input type="checkbox"/> Customer Charge	<input type="checkbox"/> MECHANICAL
3	D-BS-MM11-E-03	A	B	06	Core Memory stack (2 sheets) See final release print.	<input type="checkbox"/> TECH MANUAL	<input checked="" type="checkbox"/> Product Line Change	<input type="checkbox"/> MODULE
4	A-PL-MM11-E	Z	AA	06	UPDATE PRINT PER THIS ECO.	<input type="checkbox"/> TESTER		ORDER PR MODEL
5	C-DI-MM11-E-01	E	F	06	UPDATE PRINT PER THIS ECO	<input type="checkbox"/> TEST PROG		<input type="checkbox"/> YES
6	A-PL-7006468-0-0	D	E	06	UPDATE REV PER THIS E.C.O.	<input type="checkbox"/> TOOLING		<input type="checkbox"/> NO
						<input type="checkbox"/> PRO INST		
						<input type="checkbox"/> ENG SPEC		
						<input type="checkbox"/> PURCH SPEC		

**DISPOSITION CODES**

- 00 - RETURN TO STOCK
- 01 - (DELETED)
- 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
- 03 - REWORK IMMEDIATELY (RETROFIT)
- 04 - (DELETED)
- 05 - (DELETED)
- 06 - DOCUMENT CORRECTION
- 07 - NEW ITEM (THIS ASSEMBLY)
- 08 - NEW ITEM (THIS COMPANY)
- 09 - SCRAP IMMEDIATELY

**APPROVAL SIGNATURES**

DESIGN ENGR Pete Durant *(Hand Signature)*  
 ENG MOR (OPT) \_\_\_\_\_  
 FIELD SERVICE (OPT) \_\_\_\_\_  
 CHIEF ENGR (MODULES ONLY) \_\_\_\_\_



ENGINEERING CHANGE ORDER  
ADD/DELETE SHEET


ECO NO  
MM11E-00024  
Sheet \_\_\_ of \_\_\_

WIRE LIST NO. K-WL-MM11-E-07

TITLE  
MM11E


MAKE ALL DELETIONS FIRST WHEN INSTALLING

SIGNAL NAME	FROM PIN	TO PIN	COMPONENTS	ADD	DEL
READ H	C02V2	D01A1	REMARKS		X
READ 01 H	C01F2	C02C1		X	
STROBE 0 H	C01F1	D02S1			X
STROBE 01 H	C01A1	E02S1			X
TINH 0 H	D02E1	E01S1			X
TINH 1 H	E01H2	F01F1			X
STROBE 0 H	C01F1	D02S1	WHT	X	
GND	C01C2	D02T1	BLK	TWP	X
STROBE 01 H	C01A1	E02S1	WHT	X	
GND	C01C2	E03T1	BLK	TWP	X
T 0 IN H	E01S1	D02E1	WHT	X	
GND	E01C2	D01C2	BLK	TWP	X
T 1 IN H	E01H2	F01E1	WHT	X	
GND	E01C2	F01C2	BLK	TWP	X

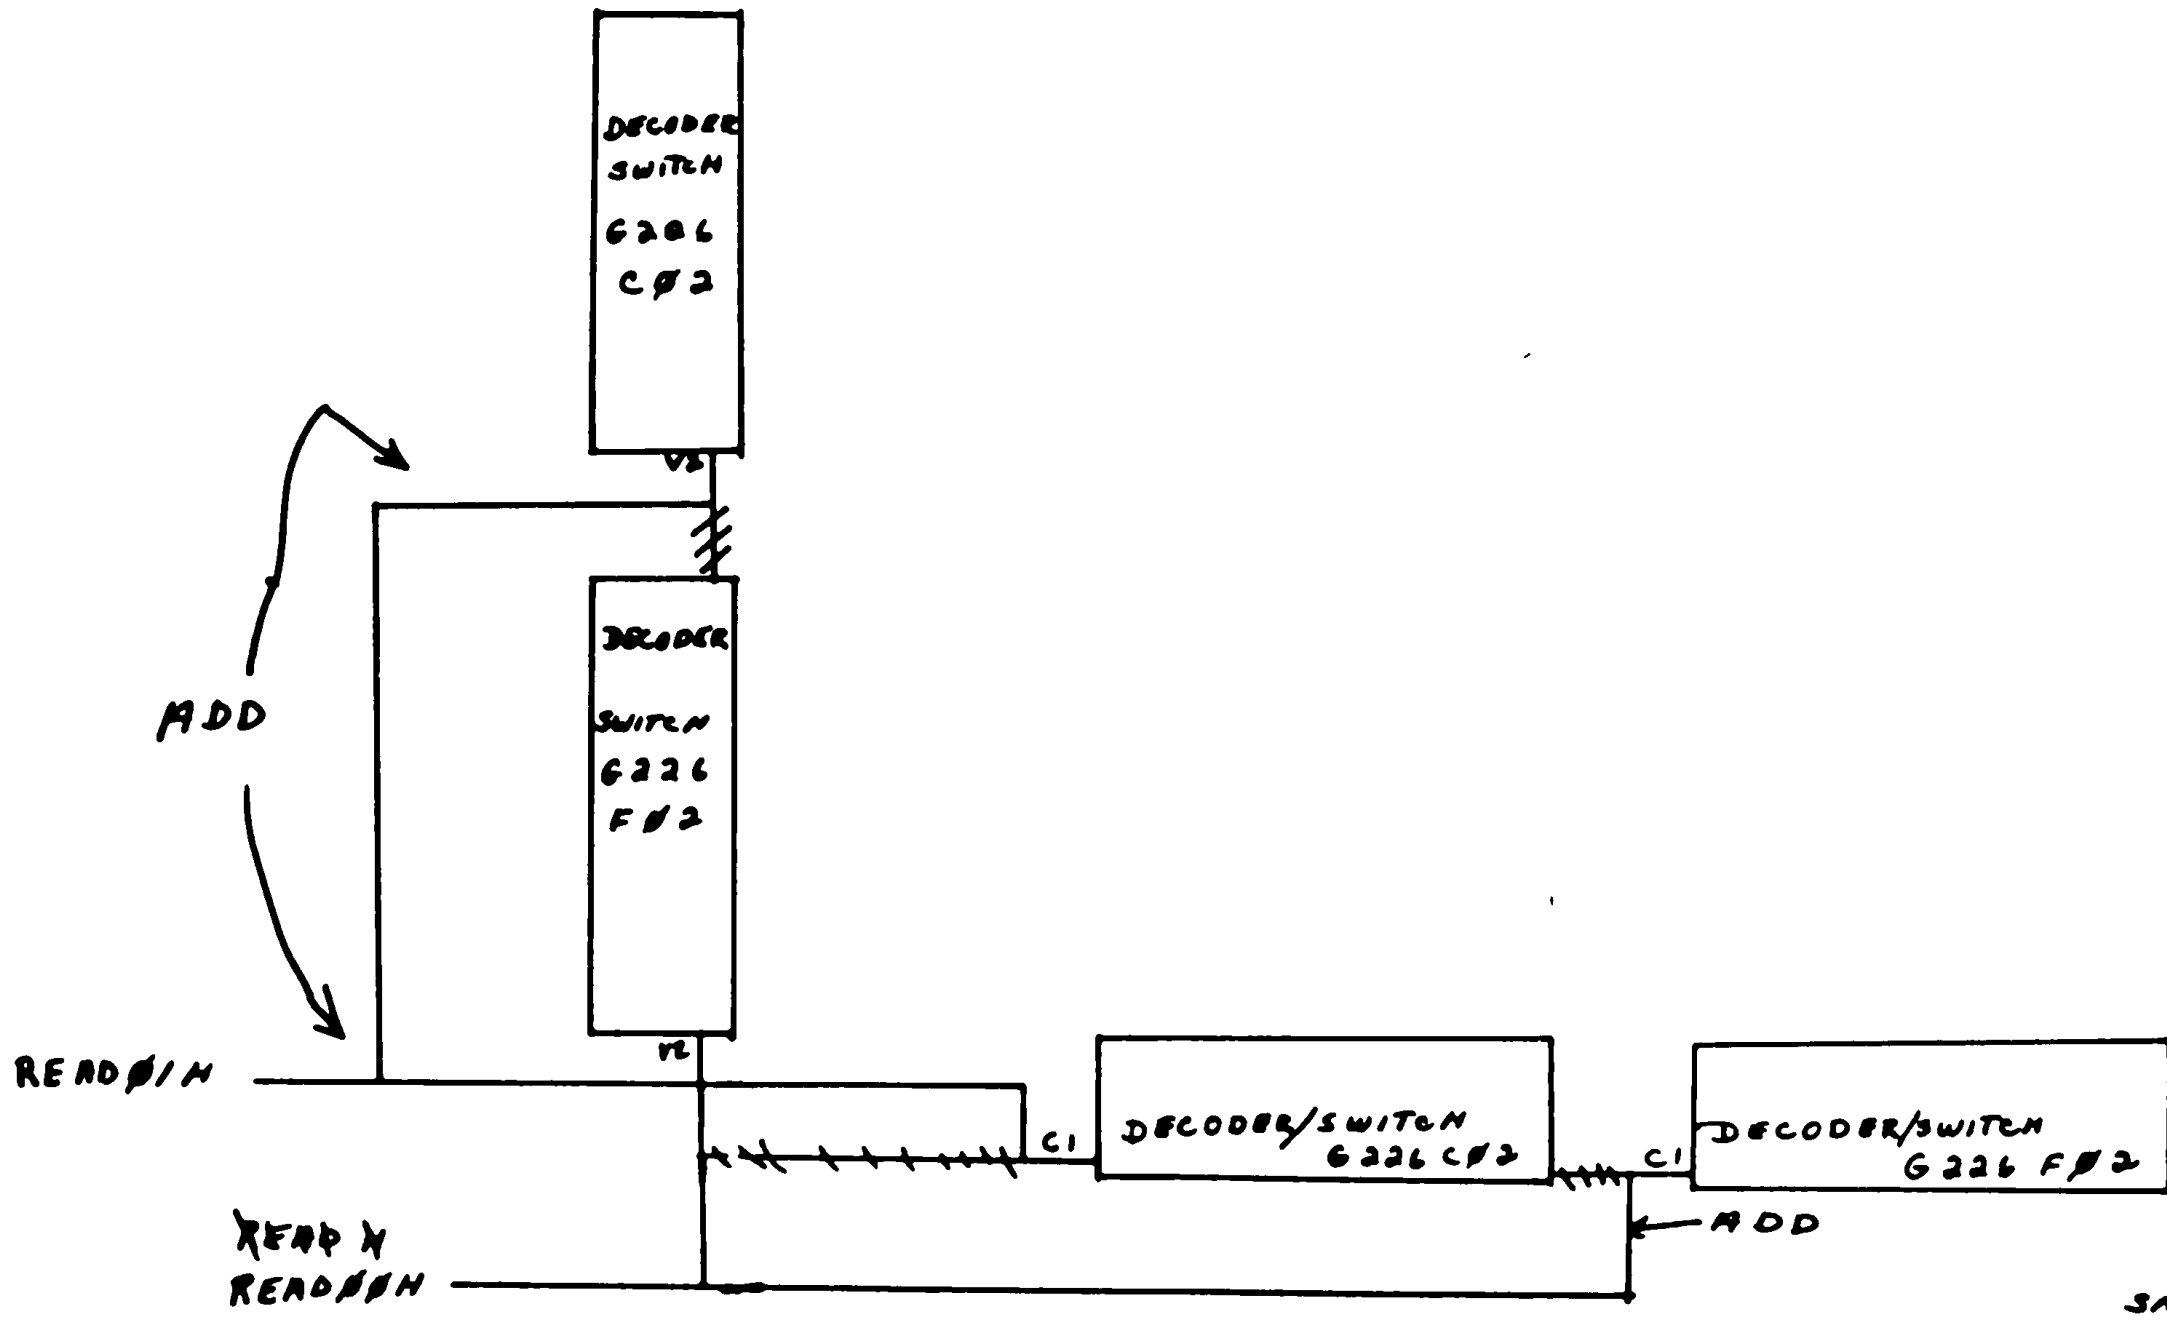

SHEET 192

ENGINEERING CHANGE ORDER	CORP. MEMORY STACK DRIVE	NO. D-BS-MM11E-03	REV B
	URN Cathy	REV. 01	GRAPHIC DESCRIPTION

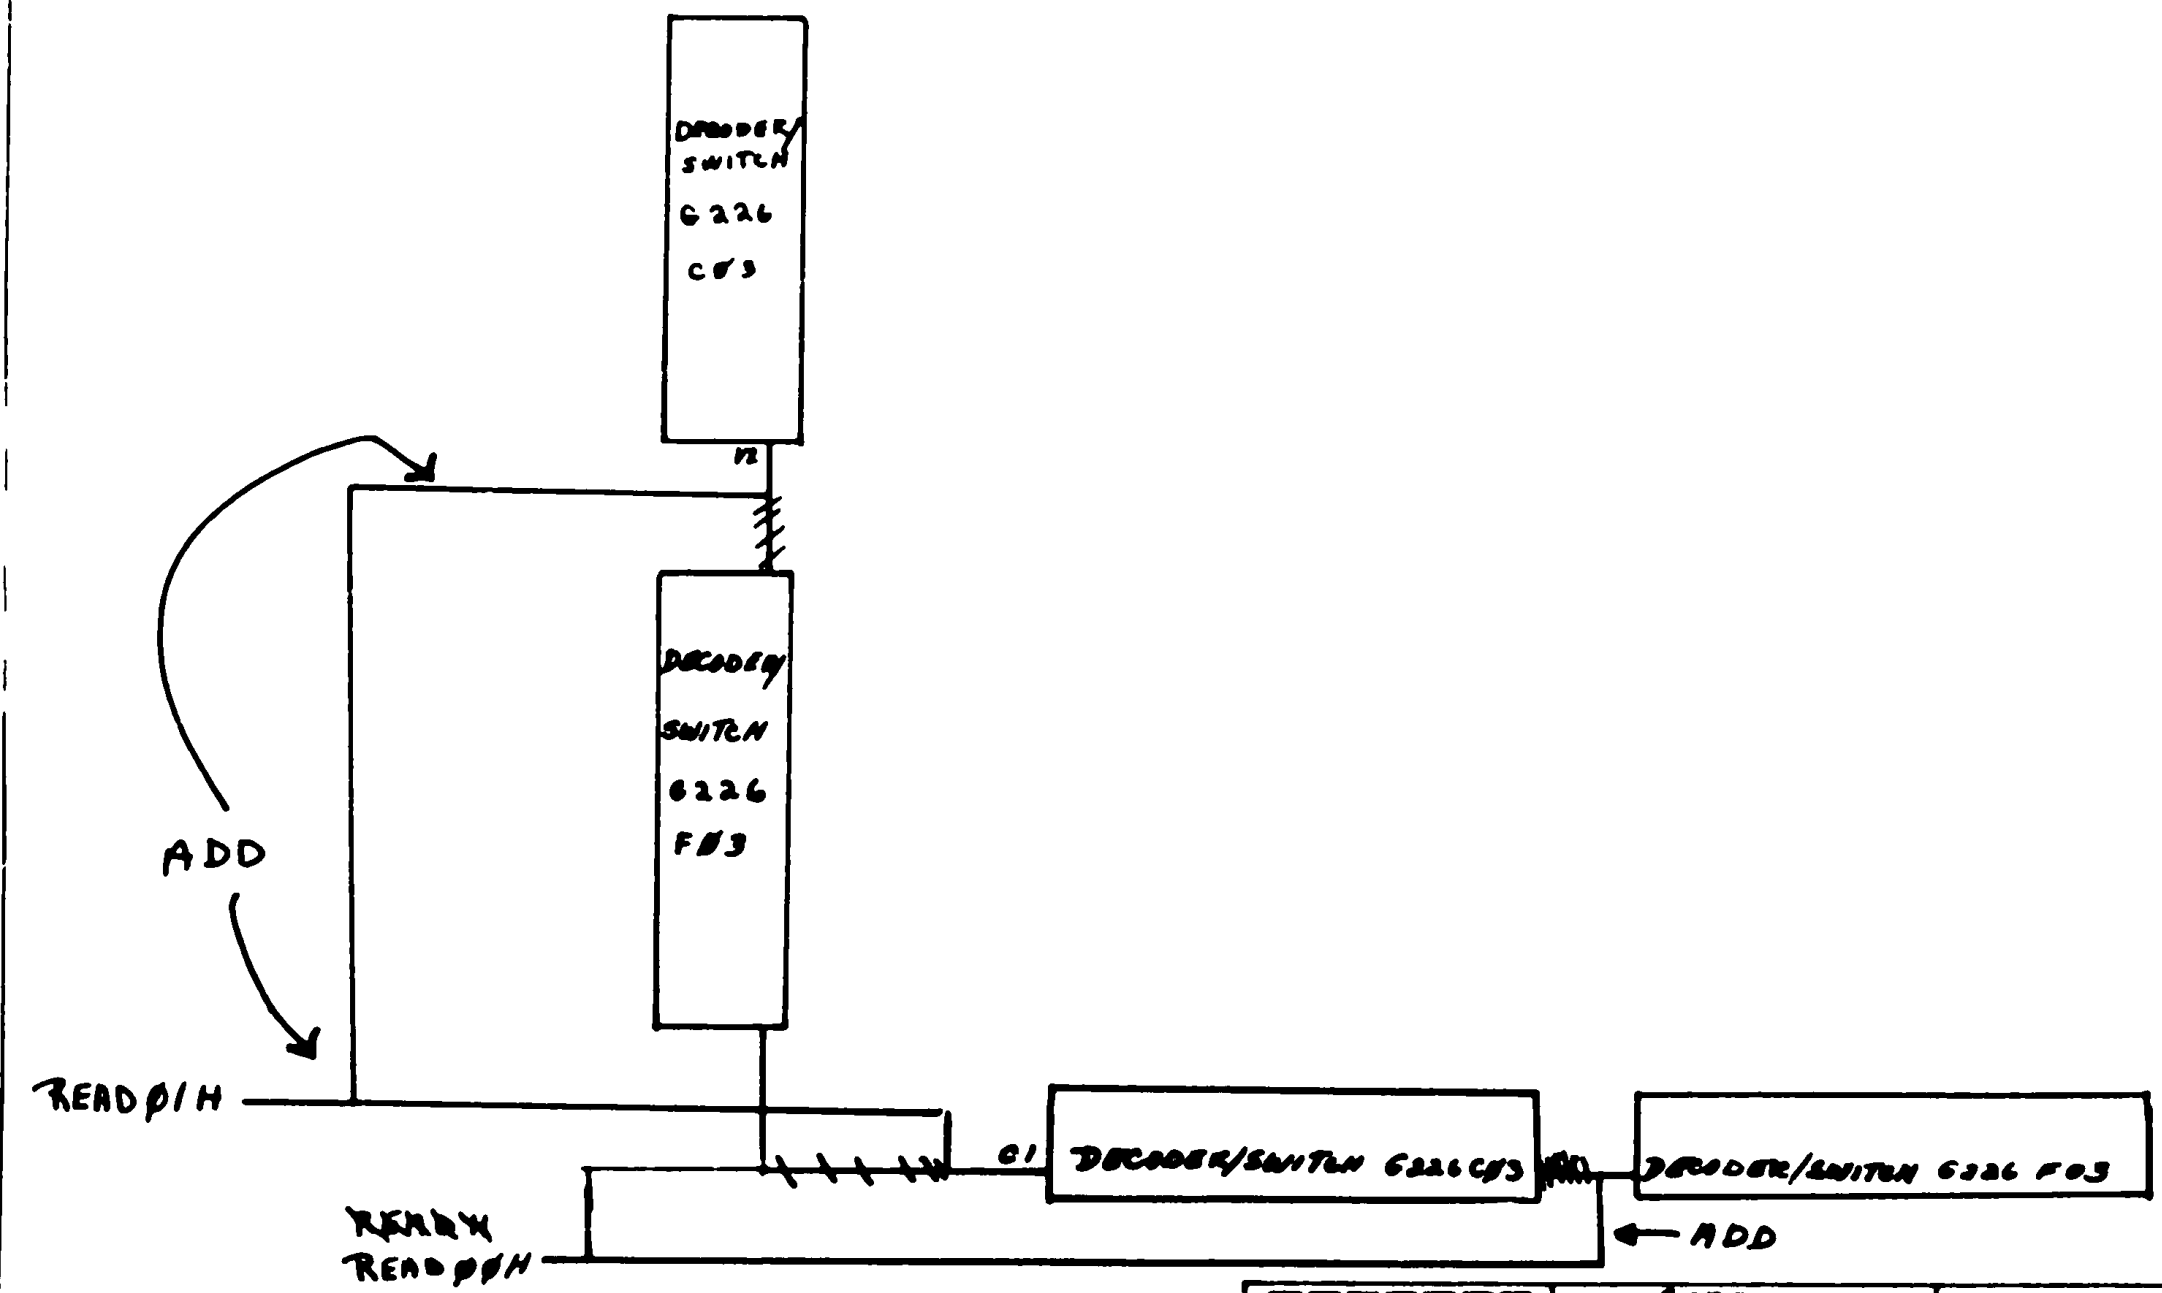

SN02 of 2


digital	CORE MEMORY STACK (Y DRIVER)	D-BS-MM1E-03	REV B
	ENGINEERING CHANGE ORDER		

ECO NO MM116-002Y

WIRE TABLE

SIGNAL NAME	FROM PIN	TO PIN	COLOR	REMARKS	SIGNAL NAME	FROM PIN	TO PIN	COLOR	REMARKS
STROBE PH GND	CA1A1 CA1C2	EB2E1 EB2T1	WHT BLK	TWP	TO INH GND	EO1S1 EO1C2	DB2E1 DB2C2	WHT BLK	TWP
					TI INH GND	EO1N2 EO1C2	FO1E1 FO1C2	WHT BLK	TWP
					STROBE PH GND	EO1P1 EO1C2	DO2S1 DO2T1	WHT BLK	TWP

ADD

 ENGINEER NO CHANGE ORDER	WIRE ASS'Y MM11-8	NO. D-AD-700674-1-0 REV E
	DATE <i>Alan [Signature]</i>	GRAPHIC DESCRIPTION



# FIELD CHANGE ORDER

4's

FCO MM11E - B 0024  
PAGE     OF    

DATA PROCESSING AND DEC-ECO-LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO

### LEVEL OF URGENCY CODE

- A MANDATORY HIGH PRIORITY
- B MANDATORY
- C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT
- E PRODUCT IMPROVEMENT OPTIONAL LOW PRIORITY

### FIELD EFFECTIVITY

Retrofit all MM11-E's

FIELD RETROFIT IS ANTICIPATED IN 100 OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE

STANDARD APPLICABILITY THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE, OTHERWISE AT CUSTOMER EXPENSE

DOCUMENTATION    PARTS    DEC ON-SITE LABOR   

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY

### FIELD OFFICE FCO DISTRIBUTION CODE

- F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES
- DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED

### R/O KIT DISTRIBUTION

PSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE

~~PSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE~~ KITS AS DEFINED BELOW MAY BE ORDERED AS REQUIRED

### CONTENTS OF AN PSIC INITIATED KIT

FIG	FCO	PRINTS	PARTS

PSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES

### CONTENTS OF A FIELD ORDERED KIT

FIG	FCO	PRINTS	PARTS
	X	X	

D H K B

PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST

### INSTALLATION AND TEST PROCEDURES

### DISCRETE PRODUCT NUMBER

(FOR FIELD SERVICE REPORTING)

AVAILABILITY DELAY	NO PARTS
PARTS	X

ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING 1.0 HOURS

SPECIAL TEST EQUIPMENT TOOLS, OR SUPPLIES

LAST PREVIOUS FCO'S D022, C020, C017

RELATED OR PREREQUISITE FCO'S  
M729-00003

- MANDATE CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

### VERIFICATION MAINDECS

### PARTS REQUIRED

WTM:

Necessary to improve reliability on existing units.

FIELD SERVICE APPROVAL  
DATE       

5/11 5/17 (1534) 5/17 800

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE THEREFORE, ONLY PARTS OF IT ARE READABLE.

DS

FCR

**MM11-E  
PDP-11 MEMORY  
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

**• Indicates FCO Conjunction Must Be Considered With Prior FCO**

- |   |  |
|---|--|
| <p><b>1</b> G102-B0002 MAR 70<br/>G102-B0003<br/>QUICK SYNOPSIS<br/>8881 IC's replaced by higher speed 74H011 IC's<br/>QUICK CHECK<br/>74H011 IC's in place of 8881 IC's<br/>NEW REVISION<br/>Exchange with CS B or later</p> | <p><b>1</b> G103-C0005 JUN 70<br/>QUICK SYNOPSIS<br/>Provides increase to 6.8VDC for sense amplifiers<br/>QUICK CHECK<br/>Heat sink ADD'ed to Q4 C1 and C2 changed from 1000mmfd to 820mmfd<br/>NEW REVISION<br/>Rework etch D, E to CS D</p>        |
| <p><b>1</b> G103-C0002 MAR 70<br/>QUICK SYNOPSIS<br/>Increases system speed<br/>QUICK CHECK<br/>7410 IC replaced by 74H10 IC<br/>NEW REVISION<br/>Rework etch B, C to CS B</p>  | <p><b>1</b> G225-C0003 JUL 70<br/>QUICK SYNOPSIS<br/>Speeds stabilization of X and Y current generator reference voltage<br/>QUICK CHECK<br/>R22 changed from 4.7K ohms to 2.2K ohms<br/>NEW REVISION<br/>Rework etch B to CS B</p>                  |
| <p><b>1</b> G103-C0004 APR 70<br/>QUICK SYNOPSIS<br/>Provides new higher value trimpot<br/>QUICK CHECK<br/>R17 changed from 100 ohm to 500 ohm trimpot<br/>NEW REVISION<br/>Rework etch B, C to CS C</p>                      | <p><b>1</b> MM11E-C0016 AUG 70<br/>QUICK SYNOPSIS<br/>Provides wire table and wiring instructions to ensure correct memory margins and G102 interchangeability</p>   |
| <p><b>1</b> G102-B0004 JUN 70<br/>QUICK SYNOPSIS<br/>Decreases turn-off time of the 2007 transistors<br/>QUICK CHECK<br/>C2, C7, C12, C17 changed from 1000mmfd to 820mmfd<br/>NEW REVISION<br/>Rework etch D to CS D</p>     | <p><b>1</b> MM11E-A0015 SEP 70<br/>QUICK SYNOPSIS<br/>Connects AC LO L and DC LO L signal from the Power Bus to the Unibus to ensure proper Power Fail<br/>QUICK CHECK<br/>BUS AC LO L tied to pin F1<br/>NEW REVISION<br/>Rework to Wire List B</p> |

**MM11-E  
PDP-11 MEMORY  
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

**• Indicates FCO Conjunction Must Be Considered With Prior FCO**

- **M930-C0001 AUG 70**  
**QUICK SYNOPSIS**  
Power Fail requires BUS SP1 and BUS SP2  
for AC LO and DC LO (In-plant. new etch B at  
CS A)  
**QUICK CHECK**  
R57 and R69 are 390 ohms  
**NEW REVISION**  
Rework etch B to CS A
- **8408475-C0008 OCT 70**  
**QUICK SYNOPSIS**  
AC LO and DC LO returns high after assertion  
in multiple box systems.  
**QUICK CHECK**  
D003 clamping diodes from AC LO (anode)  
and from DC LO to +5V line  
**NEW REVISION**  
Rework etch A, B, C to CS D
- **MM11E-C0017 JAN 71**  
**MM11E-C0020**  
**QUICK SYNOPSIS**  
Improves memory performance  
**QUICK CHECK**  
Wire ADD B04F2 to A03S2
- **M729-C0002 JAN 71**  
**QUICK SYNOPSIS**  
Reduces memory cycle time on systems with  
8K interleaved memory (In-plant. new etch C)  
**QUICK CHECK**  
Wire ADD E9 pin 2 to feed-thru near E6 pin 1  
**NEW REVISION**  
Rework etch B to CS B
- **M1091-C0001 MAR 71**  
**QUICK SYNOPSIS**  
Provides 1 unit load on BUS in systems with  
16K or more memory  
**QUICK CHECK**  
M1091 replaced M109 module  
**NEW REVISION**  
Rework etch B to CS A
- **G102-B0008 APR 71**  
**QUICK SYNOPSIS**  
Eliminates MM11-F's noise susceptibility  
**QUICK CHECK**  
C3 C8, C13 C18 changed from 33mmfd to  
120mmfd  
**NEW REVISION**  
Rework etch D to CS D
- **G225-C0007 MAY 71**  
**QUICK SYNOPSIS**  
Prevent heat sinks from shorting to etch  
**QUICK CHECK**  
Insulating washers under heat sinks
- **M7290-C0002 OCT 71**  
**QUICK SYNOPSIS**  
Prevents Unibus hang with SSYN asserted  
from memory (In-plant. new etch E)  
**QUICK CHECK**  
Wire ADD E8 pin 5 to E7 pin 9  
**NEW REVISION**  
Rework etch C to CS D
- **MM11E-D0022 MAR 77**  
**QUICK SYNOPSIS**  
Module protection plate prevents MM11 E  
noise interaction with adjacent modules  
**QUICK CHECK**  
Presence of protection plate
- **MM11E-B0024 MAY 72**  
**QUICK SYNOPSIS**  
Reduces noise on TINH and strobe signals  
**QUICK CHECK**  
Wire ADD C01F1 to D02S1/C01C2 to  
D02T1  
**NEW REVISION**  
Rework to Wire List E

**MM11-E  
PDP-11 MEMORY  
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

**• Indicates FCO Conjunction Must Be Considered With Prior FCO**

**12** **M729-C0003 MAY 72**  
**M729-D0004**  
**QUICK SYNOPSIS**  
Unibus hangs with S5YN asserted from  
memory  
**QUICK CHECK**  
Wire ADD E5 pin 8 to E3 pin 1  
**NEW REVISION**  
Rework etch B, C to CS C

**13** **M7290-C0003 MAY 72**  
**QUICK SYNOPSIS**  
Reduced inductance of the TINH H etch cor-  
rects noise condition (In-plant, new etch F)  
**QUICK CHECK**  
Wire ADD E11 pin 8 to feed-thru going to  
AR1  
**NEW REVISION**  
Rework etch C, D to CS E

ECO  
QUICK CHECK

MM11-E/F FIELD CODED ECO's

G102	B2, B3, C4, B6
G103	C2, C4, C5, C7
G225	C3, C7
G226	C4
M729	B2, C3 & A & B
M1091	C1
M7290	C2, C3
MM11-E	C15, C16, C17, C20, D22, B24
MM11-F	D1, C3

MM11-E/F ECO PARTS

<u>NAME</u>	<u>ECO#</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS &amp; DESCRIPTION</u>
G102	#2	1	19-09849	I.C.
	#3	8	13-03064	Resistor
	#4	4	10-00027	Capacitor
		4	13-09995-0	Resistor
		1	16-09996-0	Indicator
	#6	4	10-00018	Capacitor
G103	#2	3	19-09057	I.C.
	#4	1	13-05631	Resistor
	#5	2	13-02602	Resistor
		2	13-09994-0	Resistor
		1	13-00295	Resistor
		2	10-00027	Capacitor
		1	11-09991	Diode
		1	11-09990	Diode
		1	16-09996-0	Conductor
	1	12-10001-0	Heat sink	
	#7	1	10-10274	Capacitor
G225	#3	1	13-00417	Resistor
	#7	4	90-08493	Washers
A/R			90-08268	Thermal compound
G226	#4	1	10-10274	Capacitor
M792	#3	1	19-05547	I.C.
M1091	#1	1	M1091 etch "B"	if applicable module
MM11-F	#1	1	74-08490	Memory shield
MM11-E	#2	1	74-08490	Memory shield

MM11-E/F PARTS BREAKDOWN

7006405	- Logic Frame
7006468	- MM11-E Wired assembly
70007263	- MM11-F Wired assembly
G102	- Sense Inhibit Card
G103	- Memory Levels & Gates
G225	- X-Y Current Generator
G226	- X-Y Current Generator
H207	- 4K 16 Bit Core Memory Stack
M109	- Device Select
M729	- MM11-E Control Logic
M1091	- Device Select
M7290	- Control Logic & Timing
MM11-E	- 4K Single Memory Unit
MM11-EX	- 4K Interleaved
MM11-F	- 4K Single Memory Unit
MM11-PP	- Single Parity Memory Unit
MM11-PX	- Interleaved Memory (jumpers)

MM11-E MEMORY		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 2
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00002	01/70		A		Jumper D01-B1 to E01-E1			NIL					
00003	01/70				Black wire of twisted pair from C02-C2 to E03-C2			NIL					
00006	02/70		B		Jumper A01-S2 to A04-S2			NIL					
C 00015	09/70		C		<u>NOTE:</u> 1) Rework multiple box systems only 2) Must have ECO 5408475-00006 and M930-00001 Jumper A03-S2 to B04-F2			NIL					
C 00016	12/70			1.5	Blue jumper from E01-C1 to E01-E2 looping through logic			NIL					
C 00017	01/71		D		Jumper B04-F1 to A03-R2			NIL					
C 00020	03/71				<u>NOTE:</u> F/S information regarding strobe and threshold level settings			NIL					
D 00022	04/71			1.0	A module protection plate along MM11-E memory bank		1	74-08490					
B 00024	06/72		E	1.0	<u>NOTE:</u> Must have ECO M729 #3 Black wire of twisted pair from E01-C2 to F01-C2.			NIL					

MM11-E		MEMORY		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPS	PAGE 1 2 OF 2
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00025	05/76				NOTE: Documentation change				NIL						

MM11-F 4K 16 BIT MEMORY				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALTI	CE NAME	
D 00001	3/72			1.0	A module protection plate along each MM11-F bank.			1	74-08490						
00002	5/72				NOTE: Print update of test procedure				Nil						
C 00003	8/72		A	1.0	NOTE: Must have ECO M7290-C0003 Red jumper C01-C2 to E01-T1				Nil						

G102 SENSE INHIBIT CARD				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH #	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CS NAME			
00001	3/70		C		<u>NOTE:</u> Documentation change		Nil								
B 00002	3/70	B	D	0.5	E5 is a DEC I.C. 74H01-1 E5 is the 1st I.C. from AS1	1	19-09849								
B 00003	4/70	B	D		<u>NOTE:</u> Supplement to ECO # 2 R4 is a 75 ohm 1/8W resistor R4 is the 1st resistor from AA1	8	13-03064								
C 00004	6/70	C	D	.5	R2 is a 56 ohm 1/4W 5% resistor R2 is the 1st resistor above E2 E2 is a DEC transformer	4 4 1	10-00027 13-09995-0 16-09996-0								
00005	6/71		D		<u>NOTE:</u> See ECO # B6		Nil								
B 00006	4/71	D	D	.25	C3 is a 120 MMF 5% capacitor C3 is the closest capacitor from AA1	4	10-00018								
00007	06/77	E	D		<u>NOTE:</u> 1) PHASE IN DEC 7438 TO REPLACE 74H01-1 AT E5 2) CHANGES FCO #2 E5 IS A DEC 7438 E5 IS THE LAST I.C. FROM AS1	1 OR 1	19-0949-00 19-11219-01 (SEE ECO #7)								

3103 MEMORY LEVELS & GATES				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	1/70	A	A		<u>NOTE:</u> Print update				N/A						
C 00002	3/70	B	A	.5	E2 is a I.C. DEC 74H10 E2 is the 1st i.c. from AH1			3	19-09057						
00003	3/70		A		<u>NOTE:</u> Print update				Nil						
C 00004	4/70	C	A	.25	R17 is a 500 ohm trim pot R17 is located in bottom left corner			1	13-05631						
C 00005	6/70	D	A	1.0	R1, R2 are <u>56</u> ohm, 1/4W, 5% resistors R1 & R2 are the two resistors just right of R4 R4 is the 10W resistor nearest the top right corner			2 2 1 2 1 1 1 1	13-02602 13-09994-0 13-00295 10-00027 11-09991 11-09990 16-09996-0 12-100001-0						
00006	2/71	E	A		<u>NOTE:</u> Print change				Nil						
C 00007	1/72	F	A	.25	C11 is a <u>.22</u> mfd 50V capacitor C11 is the only capacitor left of the two transistors at AC1			1	10-10274						

G225 X - Y CURRENT GENERATOR				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE		
															1	OF	1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME			
C 00003	7/70	B	B	1.0	R22 is a 2.2K 1/4W 5% resistor R22 is the 3rd resistor from bottom left corner			1	13-00417								
00004	7/70	C	C		R5 is a 680 ohm 1/4W 5% resistor R5 is the 1st resistor from AAL			4	12-02313								
								4	13-00347								
								4	13-00394								
00005	8/70	C			NOTE: Print change				Nil								
00006	9/70	D	D		NOTE: New etch rev				Nil								
C 00007	5/71	E	D	1.0	NOTE: Rework only "D" etch boards Insulating washers on all four heat sinks are tight and can not be rotated.			4	90-08493 90-08268 (thermal compound)								

G226 X - Y DECODER SWITCH				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH NO.	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	WAINDESS REQUIRED	PRINT SET UP/DATED	ACTUAL INSTALL DATE	DATE INSTALLED	CD			
00001	11/69	A	C		C22 is a .1ufd 50V capacitor C22 is below the two 1/4W resistors on board which are separated by a capacitor		N/A								
00002	3/70	B	C		<u>NOTE:</u> Documentation		Nil								
00003	3/70	C	C		Resistor closest to the bottom left corner is a <u>120</u> ohm 1/4W 5% resistor		N/A								
<b>C</b> 00004 62 63	11/71	D	D	0.5	C22 is a .22 ufd 50V capacitor C22 is below the two 1/4W resistors on board which are separated by a capacitor	1	10-10274								

M109		DEVICE SELECT		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
NONE					NOTE: NO ECO's										


M729		MM11-E Control Logic		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	03/70	A	B		<p><u>NOTE:</u> 1) New etch rev 2) Rework Etch "A" Revs E5 is aDEC I.C. 74 H 74</p>				N/A						
B 00002	01/71	B	C	1.0	<p><u>NOTE:</u> 1) Must be installed in interleaved memories and optional for non-interleaved memory 2) Rework etch "B" rev only (ECO #3 has better rework instructions) No capacitor between the 270 OHM and 390 OHM resistors located near the upper left hand corner</p>				NIL						
C 00003 6A 6B	06/72 01/73	C	C	1.5	<p><u>NOTE:</u> ECO# 3 contains ECO #2 &amp; #3 rework instructions for all etch revs Measure an open CKT from E04-09 to E09-01 E09 is the 4th I.C. from AK1</p>			1	19-05547	DZQCG DZQCA DZQCB					


M1091 DEVICE SELECT				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
C 00001	3/71	*	A	N/A	NOTE: MM11-E systems M1091 module if 16K of memory or more			1	M1091 etch "B" (if applicable)					
00002	3/71	A	B		NOTE: MM11-E, MM11-F and MMR11-E memory systems phase in M1091 modules. Check for M1091 module			1	M1091 Etch "B"					

REVISION DATE JUNE 1977

M7290 CONTROL AND LOGIC				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME			
00001	2/71	C	D		Jumper E06-06 to E31-10 feed through E6 is the 3rd I.C. from AL1 E31 is the last I.C. on board		Nil								
C 00002	9/71	D	E D C	2.0	<u>NOTE:</u> Rework "C" & "D" etch boards Jumper E03-03 to T07-10 feed through		Nil								
C 00003	8/72	E	F E D C	4.0	<u>NOTE:</u> 1) Must have ECO MM11-F-C0003 2) Rework all previous etch boards Jumper E02-08 to AC1		Nil	DZMMA thru DZMMI							
00004	1/77	F	F E D C		<u>NOTE:</u> DEC 74M01-1 DIRECT SUBSTITUTION TO DEC 7438 E IS A DEC 7438 E IS		NIL								

MM11-F

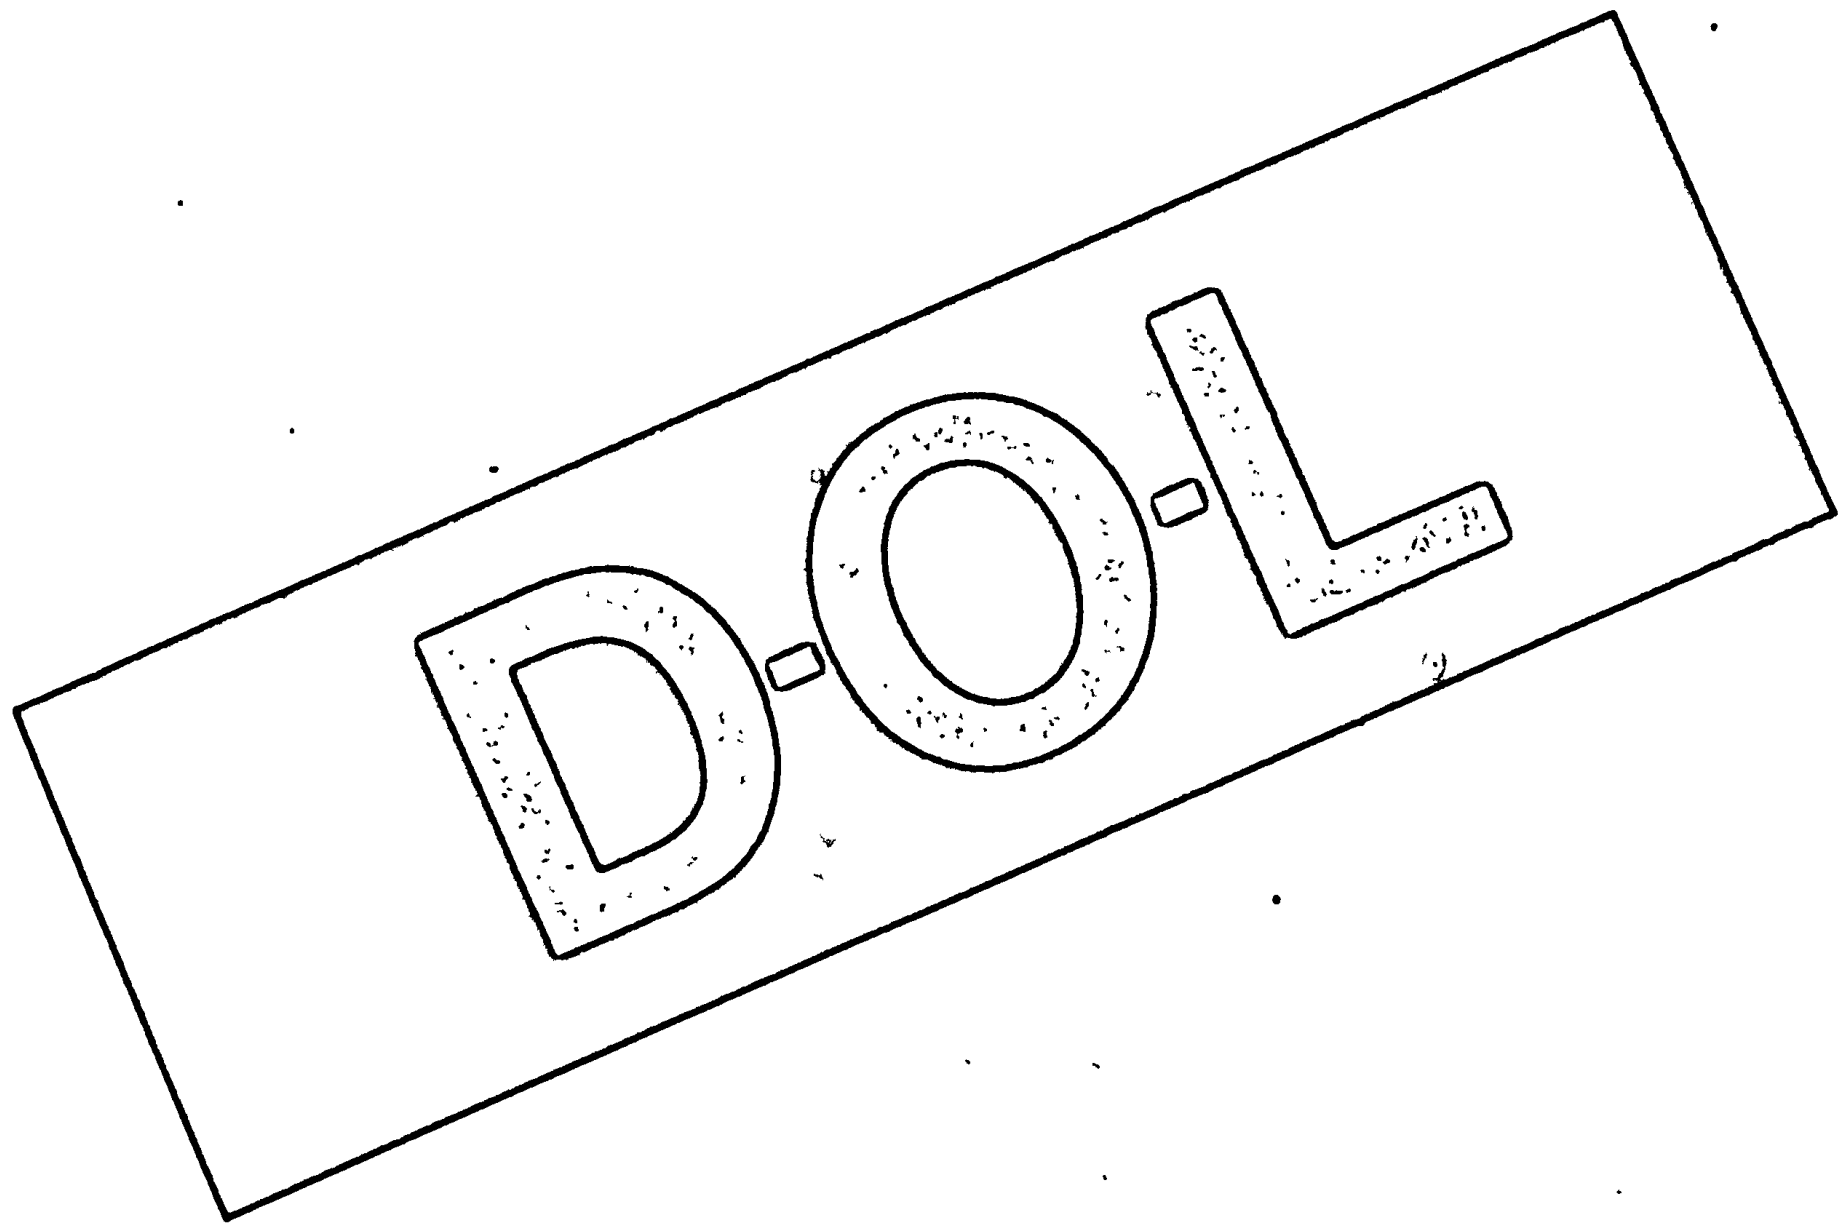



**MM11-F**  
 4K 16 Bit  
 22 Mil Memory

2366 R624

**PROCESSOR TYPE PDP-11**

**MM11F 0001 CODE: DF MI A**  
**MAR 2** PROBLEM Under some conditions when other options are placed along side an MM11-F they fail to operate correctly.  
**CORRECTION** Install a nodule protection plate.  
**INSTALLATION** Install all MM11F as required.  
**Field Effectivity** All MM11F as required.  
**Time To Install And Test** 10 Hours  
**Kit Contents** PDU Prints And Parts

**MM11F 0002 CODE: P MI B**  
**MAR 2** PROBLEM MM11F Test Procedure needs updating.  
**CORRECTION** Update Test Procedure.  
**INSTALLATION** MM11FX print sets are the same as MM11F.  
**CORRECTION** Update old MM11FX Master Drawing of the New Master Drawing and format on MM11F to include MM11FX.  
**Field Effectivity** Documentation change only.

**MM11F 0003 CODE: F MI D WL A**  
**MAY 2** PROBLEM 1. Probe signals and TSM have too much noise.  
**CORRECTION** 1. Install twisted pairs on probe signals generate another TSM signal and install twisted pairs on four signals.  
**INSTALLATION** 2. DDMMW signal has too many leads on it.  
**CORRECTION** 2. Develop another DDMMW signal to share the load.  
**CORRECTION** 3. Solve memory problems caused by DMA transfers that memory diagnostics don't show up. Also solve and send to GIB GIB problems.  
**Field Effectivity** Network immediately.  
**Field Effectivity Method** at MM11F.  
**Time To Install And Test** 4 Hours  
**Kit Contents** PDU Prints

JUN 7 1976

C7

F F C O O ' S



ENGINEERING  
CHANGE ORDER 8524

ORIGINATOR Richard Manior 5-2  
TEL EXT 2005 DATE 3/13/72  
DISC PROJ NO 11 07602  
COST CENTER NO 392

J.S.

ECO NO. MM11F-0001  
SHEET 1 OF 3  
DATE RECEIVED 3-16-72  
FIRST ISSUE 3-20-72  
FINAL ISSUE

**PROBLEM**  
Under some conditions when other options are placed along side an MM11/F they fail to operate correctly.

UNIT TO BE CHANGED

MM11/F  
Memory

DISP CODE \*

OPTIONS AFFECTED

MM11/F

**CORRECTION**  
Install a module protection plate.

**BREAK-IN/EFFECTIVITY**  
\*Install module protection plate only when problems occur.

PRODUCT LINES  
AFFECTED

PDP11/20

ITEM NO	DOCUMENT/PART NO	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE	DOCUMENTATION AFFECTED	FIELD SERVICE AFFECTED	TYPE OF CHANGE
1.	A-PL-MM11-F-0	0	A	06	(Memory Assembly MM11/F) Change per this ECO.	<input type="checkbox"/> MODEL	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO	<input type="checkbox"/> ELECTRICAL
2.	7408490	-	-	07	(Module Protection Plate) Add quantity of 1 to drawing index.	<input type="checkbox"/> DIAGNOSTICS	<input type="checkbox"/> Customer Charge	<input checked="" type="checkbox"/> MECHANICAL
3.	A-ML-MM11-F	0	A	06	Update per item 1.	<input type="checkbox"/> TECH MANUAL	<input type="checkbox"/> Product Line Change	<input type="checkbox"/> MODULE
						<input type="checkbox"/> TESTER		ORDER PR MODEL
						<input type="checkbox"/> TEST PROG		<input type="checkbox"/> YES
						<input type="checkbox"/> TOOLING		<input checked="" type="checkbox"/> NO
						<input type="checkbox"/> PKG INST		
						<input type="checkbox"/> ENG SPEC		
						<input type="checkbox"/> FUNC! SPEC		

DISPOSITION CODE

APPROVAL SIGNATURES


00 - RETURN TO STOCK  
01 - (DELETED)  
02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)  
03 - REWORK IMMEDIATELY (RETROFIT)  
04 - (DELETED)  
05 - (DELETED)  
06 - DOCUMENT CORRECTION  
07 - NEW ITEM (THIS ASSEMBLY)  
08 - MP (PART)  
09

Type: niten  
Initial Signature  
DESIGN ENGR Pete Durant  
ENC MGR (OPT)  
FIELD SERVICE (OPT)  
CHIEF ENGR (MODULES ONLY)

ECO MMIF  
MMIF REWORK SHEET

SHEET 2 OF 3

1. LOOSEN 2 SCREWS AT POINTS A, CARE SHOULD BE USED AT ALL TIME SO THAT NO WIRES WILL BE DAMAGED.
2. SLIDE THE FINGERS OF THE MODULE PROTECTION PLATE UNDER THE END LUGS. THE PROTECTION PLATE SHOULD BE RIGHT AGAINST THE WIRED ASSY. FRAME, POINTS B.
- 3 TIGHTEN SCREWS.

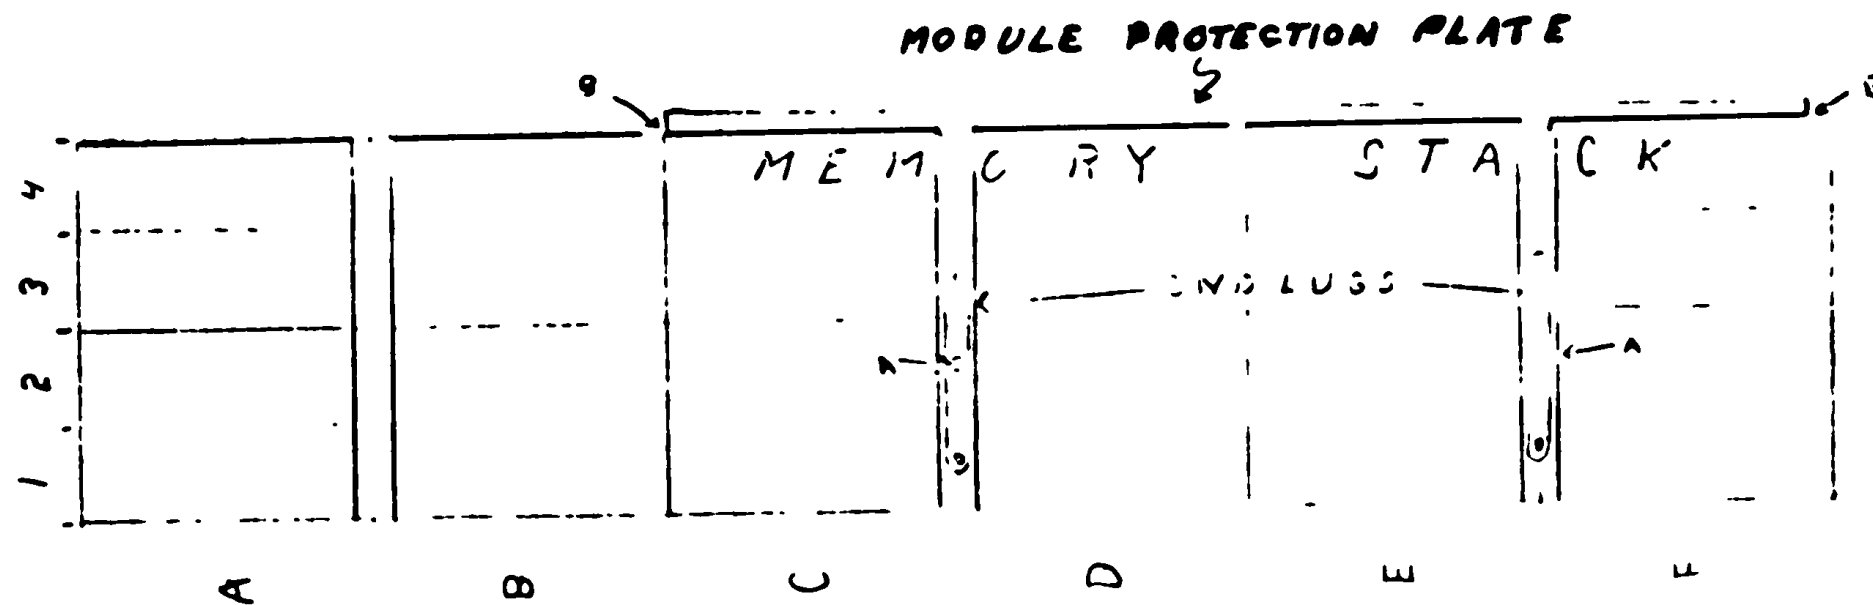



# FIELD CHANGE ORDER

FCO MM11F - D 0001  
PAGE 3 OF 3

DATA PROCESSING AND DEC ECO LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO

FIELD EFFECTIVITY  
MM11-P Memory Assembly

- LEVEL OF URGENCY CODE
- A MANDATORY HIGH PRIORITY
  - B MANDATORY
  - C HIGH PRIORITY IF SPECIFIC HARDWARE SOFTWARE, OR SYMPTOMS ARE PRESENT
  - D APPLICABLE IF SPECIFIC HARDWARE SOFTWARE OR SYMPTOMS ARE PRESENT
  - E PRODUCT IMPROVEMENT - OPTIONAL LOW PRIORITY

FIELD RETROFIT IS ANTICIPATED IN 5 % OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE

STANDARD APPLICABILITY THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE OTHERWISE AT CUSTOMER EXPENSE

DOCUMENTATION 8 PARTS 8 DEC ON-SITE LABOR 8

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC THE DEC LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY

DISCRETE PROJECT NUMBER  
(FOR FIELD SERVICE REPORTING)

AVAILABILITY DELAY  
PARTS None NO PARTS

ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING 1.0 HOURS

SPECIAL TEST EQUIPMENT, TOOLS OR SUPPLIES

FIELD OFFICE FCO DISTRIBUTION CODE

- F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES
- DF IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TO OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED

FCO KIT DISTRIBUTION

- FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EOP CONFIGURATION FILE
- ~~Field Installation Orders (FIOS) will be distributed~~ KITS, AS DEFINED BELOW MAY BE ORDERED AS REQUIRED

CONTENTS OF AN FSIC INITIATED KIT

FIG	FCO	PRINTS	PARTS

FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EOP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES

D	H	A	N		
---	---	---	---	--	--

CONTENTS OF A FIELD OFFICE DERIVED KIT

FIG	FCO	PRINTS	PARTS
	X	X	X

- PRINT CHANGES ARE MANUAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN FCO REVISED PARTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST

INSTALLATION AND TEST PROCEDURES

- Carefully install module protection plate per FCO instructions. This requires insertion of the plate under existing wire runs which can be easily broken.
- Run maincecs or other programs whose failure indicates the need for this FCO to be implemented. They should now function correctly.

LAST PREVIOUS FCO'S None

RELATED OR PREREQUISITE FCO'S

- MAINDEC CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

VERIFICATION METHODS

PARTS REQUIRED  
Q' 74-08490 Module Protection Plate

NOTES

FIELD SERVICE APPROVAL  
Charles Dewey

*CDK*  
3/20 1/2 ( ) 3/21 75

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE; THEREFORE, ONLY PARTS OF IT ARE READABLE.

**ENGINEERING CHANGE ORDER**

ORIGINATOR Richard Manion  
 TEL EXT 2005 DATE 5/10/72  
 DBC PROJ NO. 96 06122  
 COST CENTER NO. 392

ECO NO. MM11F-00003  
 SHEET 1 OF  
 DATE RECEIVED 5-12-72  
 FIRST ISSUE 5-15-72  
 FINAL ISSUE 8-4-72

**PROBLEM**

1. Strobe signals and TINH have too much noise on them.
2. Read H signal has too many loads on it.
3. Solves memory problems caused by DMA transfers that memory diagnostics don't show up, also, solves slot sensitive G103, G102 problems.

UNIT TO BE CHANGED  
 MM11/F

DISP CODE 03

**CORRECTION**

1. Install twisted pairs on strobe signals, generate another TINH signal and install twisted pairs on these signals.
2. Develop another Read H signal to share the load.

OPTIONS AFFECTED  
 MM11/F

**BREAK-IN/EFFECTIVITY**  
 All MM11/F's shipped after May 31 will have this ECO.  
 Rework M7290 module when necessary, all MM11/F's with this ECO have to have M7290's with ECO #3.

PRODUCT LINES AFFECTED  
 PDP11/15  
 PDP11/20  
 PDP11/45

ITEM NO	DOCUMENT/PART NO.	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE
1	K-WL-MM11-F-07	-	A	06	Update wire list.
2	A-PL-MM11-F-0	A	B	06	Update Rev. per this ECO.
3	A-ML-MM11-F	C	D	06	Update.
4	D-AD-7007263-0-0	-	A	06	Wire Ass'y MM11/F. See final release print.
5	D-BS-MM11-F-03	-	A	06	Core memory stack (2 sheets) See final release print.
6	A-PL-7007263-0-0	-	A	06	Update revision level.

**DOCUMENTATION AFFECTED**

MODEL  
 DIAGNOSTICS  
 TECH MANUAL  
 TESTER  
 TEST PROG  
 TOOLING  
 PKG INST  
 ENG SPEC  
 PURCH SPEC

**FIELD SERVICE AFFECTED**

YES  NO  
 Customer Charge  
 Product Line Change

**TYPE OF CHANGE**

ELECTRICAL  
 MECHANICAL  
 MODULE


ORDER PR MODEL  
 YES  
 NO

**DISPOSITION CODES**

00 - RETURN TO STOCK  
 01 - (DELETED)  
 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)  
 03 - REWORK IMMEDIATELY (RETROFIT)  
 04 - (DELETED)  
 05 - (DELETED)  
 06 - DOCUMENT CORRECTION  
 07 - NEW ITEM (THIS ASSEMBLY)  
 08 - NEW ITEM (THIS COMPANY)  
 09 - SCRAP IMMEDIATELY

**APPROVAL SIGNATURES**

Typewritten / Hand Signature  
 DESIGN ENGR Pete Durant  
 ENG MGR (OPT)  
 FIELD SERVICE (OPT)  
 CHIEF ENGR (MODULES ONLY)



ENGINEERING CHANGE ORDER  
ADD/DELETE SHEET

ECO NO.  
MM11F-00003  
Sheet \_\_\_\_ of \_\_\_\_


WIRE LIST NO. K-WL-MM11-F-07

TITLE  
MM11/F WIRE LIST  
NEW REV. A

MAKE ALL DELETIONS FIRST WHEN INSTALLING

SIGNAL NAME	FROM PIN	TO PIN	COMPONENTS	ADD	DEL
TINH H	C01C1	D02E1			X
TINH H	D03E1	E03E1			X
TINH H	E01E1	F01E1			X
STROBE 0 H	C01R1	D02S1			X
STROBE 01 H	C01R1	E01S1			X
TSS H	F01V2	F01P1			X
TINH L	C01K1	F01S1		X	
TINH L	F01S1	F01V2		X	
TINH L	F01V2	F01V2		X	
TINH 0 H	C01C1	D02E1	WHT	TWP	X
GND	C01C2	D02C2	RED		X
TINH 01 H	F01T2	F01E1	WHT	TWP	X
GND	F01T1	F01C2	RED		X
TINH 01 H	F01T2	E02E1	WHT	TWP	X
GND	F01T1	E02C2	RED		X
STROBE 0 H	C01R1	D02S1	WHT	TWP	X
GND	C01T1	D02T1	RED		X
STROBE 01 H	C01R1	E01S1	WHT	TWP	X
GND	C01C2	E01T1	RED		X

ECO NO MM11F-0003

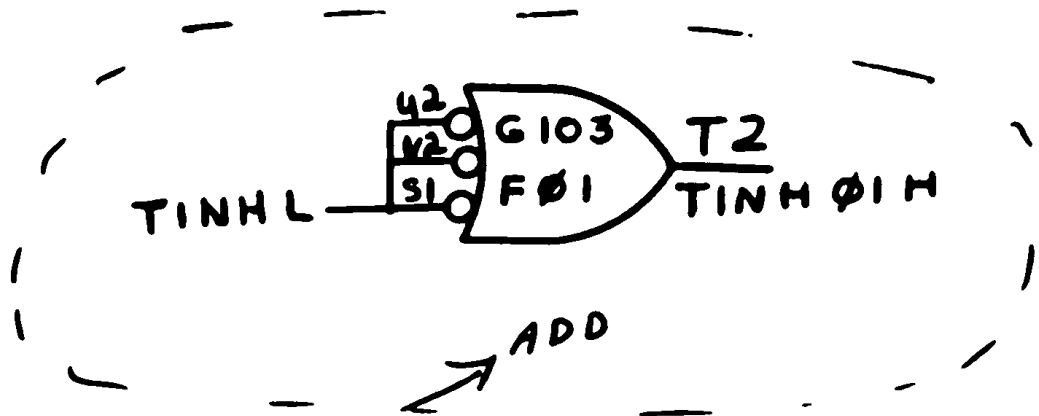

NO. PER NG CHANGE ORDER	CORE MEMORY STACK 1 (X DRIVE)	D-Ø5-MM11-F-Ø3	REV A
	BY: <i>Alice Hunter</i>	B-7	GRAPHIC DESCRIPTION

sha 3

# WIRE TABLE

SIGNAL NAME	FROM PIN	TO PIN	COLOR	REMARKS	NAME SIGNAL	FROM PIN	TO PIN	COLOR	REMARKS
-15	A03L1	F04B2	BLU	↓ WIRES MUST PHYSICALLY RUN TO THE RIGHT OF THE BLACK AND PINS					
TINN PH GND	C01C1 C01C2	D02E1 D02C2	WHT BLK	TWP					
TINN PH GND	F01T2 F01T1	F01F1 F01E2	WHT BLK	TWP	SAIB SAIB INHIB	D04Y1 D04Y2 D04Y2	GND D03J2 D03J1	WHT BLK YEL	3 TWISTED WIRES
					STROBE FB GND	L01K1 C01T1	D02S1 D02T1	WHT BLK	TWP
					STROBE B1 GND	C01A1 C01C2	E01S1 E01T1	WHT BLK	TWP

→ ADD

→ ADD

	WIRED ASSY M M 11-15	DAD-707263-0-0	REV A
ENGINEER NO CHANGE ORDER	APP: <i>[Signature]</i>		GRAPHIC DESCRIPTION

466

<div style="border: 1px solid black; width: 50px; height: 50px; margin: auto;"></div>	<h2 style="margin: 0;">FIELD CHANGE ORDER</h2>	<p>FCO <u>MM11P-C0003</u> PAGE <u>   </u> OF <u>   </u></p> <p><small>DATA PROCESSING AND DEC-ECO-LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO</small></p> <p><b>* LEVEL OF URGENCY CODE</b></p> <p>A MANDATORY HIGH PRIORITY          B MANDATORY          C HIGH PRIORITY IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT          D APPLICABLE IF SPECIFIC HARDWARE, SOFTWARE, OR SYMPTOMS ARE PRESENT          E PRODUCT IMPROVEMENT - OPTIONAL LOW PRIORITY</p> <p><b>CONCRETE PROJECT NUMBER (FOR FIELD SERVICE REPORTING)</b></p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">AVAILABILITY DELAY</td> <td style="width:50%; text-align: center;">NO PARTS</td> </tr> <tr> <td style="text-align: center;">PARTS</td> <td style="text-align: center;">X</td> </tr> </table> <p>ESTIMATED DOWN TIME FOR INSTALLATION AND TESTING <u>1.0</u> HOURS</p> <p>SPECIAL TEST EQUIPMENT, TOOLS OR SUPPLIES</p> <p>LAST PREVIOUS FCO'S <u>D01</u></p> <p>RELATED OR PREREQUISITE FCO'S <u>M7290-00003</u></p> <p><input type="checkbox"/> MANDEC CHANGE  <input type="checkbox"/> MAINTENANCE MANUAL CHANGE  <input type="checkbox"/> OPERATIONAL PROGRAMS AFFECTED</p> <p>VERIFICATION MANDECS</p> <p>PARTS REQUIRED</p>	AVAILABILITY DELAY	NO PARTS	PARTS	X										
AVAILABILITY DELAY	NO PARTS															
PARTS	X															
<p><b>FIELD EFFECTIVITY</b> Retrofit all MM11-F's</p>																
<p>FIELD RETROFIT IS ANTICIPATED IN <u>100</u> % OF UNITS DEFINED ABOVE</p>																
<p><input checked="" type="checkbox"/> <b>NO CHARGE TO CUSTOMER</b> ALL DEC INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE</p> <p><input type="checkbox"/> <b>STANDARD APPLICABILITY</b> THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE, OTHERWISE AT CUSTOMER EXPENSE</p> <p>DOCUMENTATION \$ _____ PARTS \$ _____ DEC ON-SITE LABOR \$ _____</p> <p><small>DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC. THE DEC LABOR CHARGE ASSURES FCO INSTALLATION DURING REGULAR WORKING HOURS. IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED, DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY.</small></p>																
<p><b>FIELD OFFICE FCO DISTRIBUTION CODE</b></p> <p><input checked="" type="checkbox"/> <b>F</b> IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES  <input type="checkbox"/> <b>DF</b> IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT AND TC OFFICES WHERE SUBJECT EQUIPMENT IS LOCATED</p>																
<p><b>FCO KIT DISTRIBUTION</b></p> <p><input type="checkbox"/> FSIC WILL INITIATE DISTRIBUTION OF FCO KITS AS DEFINED BELOW IN ACCORDANCE WITH THE EDP CONFIGURATION FILE</p> <p><input checked="" type="checkbox"/> <del>FCO KITS AS DEFINED BELOW, MAY BE ORDERED AS REQUIRED</del></p>																
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="4">CONTENTS OF AN FSIC INITIATED KIT</th> <th rowspan="2" style="font-size: small;">FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES</th> </tr> <tr> <td style="font-size: x-small;">FIS</td> <td style="font-size: x-small;">FCO</td> <td style="font-size: x-small;">PRINTS</td> <td style="font-size: x-small;">PARTS</td> </tr> <tr> <td style="font-size: x-small;">FIS</td> <td style="font-size: x-small;">FCO</td> <td style="font-size: x-small;">PRINTS</td> <td style="font-size: x-small;">PARTS</td> <td style="font-size: x-small;">D H K W</td> </tr> </table>		CONTENTS OF AN FSIC INITIATED KIT				FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES	FIS	FCO	PRINTS	PARTS	FIS	FCO	PRINTS	PARTS	D H K W	
CONTENTS OF AN FSIC INITIATED KIT				FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES												
FIS	FCO	PRINTS	PARTS													
FIS	FCO	PRINTS	PARTS	D H K W												
<p><input type="checkbox"/> PRINT CHANGES ARE MINIMAL AND ARE TO BE MADE MANUALLY IN RED AND GREEN. FCO REVISED PRINTS WILL BE SUPPLIED ONLY UPON SPECIAL REQUEST</p>																
<p><b>INSTALLATION AND TEST PROCEDURES</b></p>																
<p><b>NOTES</b></p> <p>Necessary to improve reliability on existing units.</p>																
<p><b>FIELD SERVICE APPROVAL</b> <u>Art Zins</u></p>		<p><u>74K</u> 5/16 5/17 (171) 5/18 400</p>														

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE; THEREFORE, ONLY PARTS OF IT ARE READABLE.

FCR

AT

MM11-F  
4K 16 BIT 22 MIL MEMORY  
FCO Cross Reference

A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- 1 G102-B0002 MAR 70  
G102-B0003  
QUICK SYNOPSIS  
8881 IC's replaced by higher speed 74H011  
IC's  
QUICK CHECK  
74H011 IC's in place of 8881 IC's  
NEW REVISION  
Exchange with CS B or later
- 2 G103-C0002 MAR 70  
QUICK SYNOPSIS  
Increases system speed  
QUICK CHECK  
7410 IC replaced by 74H10  
NEW REVISION  
Rework etch B C to CS B
- 3 G103-C0004 APR 70  
QUICK SYNOPSIS  
Provides new higher value trimpot  
QUICK CHECK  
R17 changed from 100 ohm to 500 ohm  
trimpot  
NEW REVISION  
Rework etch B C to CS C
- 4 G102-B0004 JUN 70  
QUICK SYNOPSIS  
Decreases Turn off time of the 2007  
transistors  
QUICK CHECK  
C2 C7 C12 C17 changed from 1000mmfd  
to 820mmfd  
NEW REVISION  
Rework etch D to CS D
- 5 G103-C0005 JUN 70  
QUICK SYNOPSIS  
Provides increase to 6.84VDC for Sense  
amplifiers  
QUICK CHECK  
Heat sink ADD ed to Q4 C1 and C2 changed  
from 1000mmfd to 820mmfd  
NEW REVISION  
Rework etch D E to CS D
- 6 G225-C0003 JUL 70  
QUICK SYNOPSIS  
Speeds stabilization of X and Y current gener  
ator reference voltage  
QUICK CHECK  
R22 changed from 4.7K ohm to 2.2K ohms  
NEW REVISION  
Rework etch B to CS B
- 7 M930-C0001 AUG 70  
QUICK SYNOPSIS  
Power Fail requires BUS SP1 and BUS SP2  
for AC LO and DC LO (In plant new etch B at  
CS A)  
QUICK CHECK  
R57 and R69 are 390 ohms  
NEW REVISION  
Exchange with etch B
- 5408475-C0006 OCT 70  
QUICK SYNOPSIS  
AC LO and DC LO return high after assertion  
in multiple box systems  
QUICK CHECK  
D003 clamping diode from AC LO (anode) and  
from DC LO to +5V line  
NEW REVISION  
Rework etch A B C to CS D
- 8 M729-C0002 JAN 71  
QUICK SYNOPSIS  
Reduces memory cycle time on systems with  
8K interleaved memory (In plant new etch C)  
QUICK CHECK  
Wire ADD E9 pin 2 to feed thru near E5 pin 1  
NEW REVISION  
Rework etch B to CS B

**MM11-F  
4K 16 BIT 22 MIL MEMORY  
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

**• Indicates FCO Conjunction Must Be Considered With Prior FCO**

- |  |  |
|--|--|
| <p><b>9</b> M1091-C0001 MAR 71<br/><b>QUICK SYNOPSIS</b><br/>Provides 1 unit load on BUS in systems with<br/>16K or more memory<br/><b>QUICK CHECK</b><br/>M1091 replaces M109 module<br/><b>NEW REVISION</b><br/>Rework etch B to CS A</p>                | <p><b>10</b> MM11F-C0003 MAY 72<br/><b>QUICK SYNOPSIS</b><br/>Reduces noise on TINH and strobe signals<br/><b>QUICK CHECK</b><br/>C01C1 to D02E1/C01C2 to D02C2<br/><b>NEW REVISION</b><br/>Rework to Wire List A</p>  |
| <p><b>10</b> G102-B0006 APR 71<br/><b>QUICK SYNOPSIS</b><br/>Eliminates MM11 F's noise susceptibility<br/><b>QUICK CHECK</b><br/>C3 C8 C13 C18 changed from 33mmfd to<br/>120mmfd<br/><b>NEW REVISION</b><br/>Rework etch D to CS D</p>                    | <p><b>11</b> M729-C0003 MAY 72<br/>M729-D0004<br/><b>QUICK SYNOPSIS</b><br/>Unibus hangs with SSYN asserted from<br/>memory<br/><b>QUICK CHECK</b><br/>Wire ADD E5 pin 6 to E3 pin 1<br/><b>NEW REVISION</b><br/>Rework etch B C to CS C</p>   |
| <p><b>11</b> G225-C0007 MAY 71<br/><b>QUICK SYNOPSIS</b><br/>Prevent heat sink from shorting to etch<br/><b>QUICK CHECK</b><br/>Insulating washers under heat sinks</p>  | <p><b>11</b> M7290-C0003 MAY 72<br/><b>QUICK SYNOPSIS</b><br/>Reduced inductance of TINH H etch corrects<br/>noise condition (In plant new etch F)<br/><b>QUICK CHECK</b><br/>Wire ADD F11 pin 8 to feed thru going to<br/>AR1<br/><b>NEW REVISION</b><br/>Rework etch C D to CS E</p> |
| <p><b>12</b> M7290-C0002 OCT 71<br/><b>QUICK SYNOPSIS</b><br/>Prevents Unibus hang with SSYN asserted<br/>from memory (In plant new etch E)<br/><b>QUICK CHECK</b><br/>Wire ADD E8 pin 5 to E7 pin 9<br/><b>NEW REVISION</b><br/>Rework etch C to CS D</p> |  |
| <p><b>13</b> MM11F-D0001 MAR 72<br/><b>QUICK SYNOPSIS</b><br/>Module protection plate prevents MM11 F<br/>noise interaction with adjacent modules<br/><b>QUICK CHECK</b><br/>Presence of protection plate</p>  |  |

**MM11-L**

FCR

**MM11-L**  
**8K 16 BIT 16 MIL MEMORY**  
**FCO Cross Reference**

A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- |   |   |
|---|---|
| <p>1 G110-B0004 MAY 72<br/>QUICK SYNOPSIS<br/>Corrects Delay line 3 termination on etch C<br/>G110's<br/>QUICK CHECK<br/>R115 changed from 3 K ohms<br/>NEW REVISION<br/>Rework etch C to CS D<br/>COMPATIBILITY<br/>R115 changed from 3K ohms to 1K ohms</p> | <p>1 MM11-S-C0003 OCT 72<br/>QUICK SYNOPSIS<br/>Module protection plate prevents MM11 S<br/>noise interaction with adjacent modules<br/>QUICK CHECK<br/>Presence of module protection plate</p>                                       |
| <p>2 G110-B0005 MAY 72<br/>QUICK SYNOPSIS<br/>Corrects C152 insertion polarity (positive terminal) to +5V<br/>QUICK CHECK<br/>Positive terminal of C152 goes to +5V<br/>NEW REVISION<br/>Rework etch C, D to CS E</p>   | <p>1 G110-C0010 NOV 72<br/>QUICK SYNOPSIS<br/>Data errors occur during the first DAT1 to any<br/>memory bank<br/>QUICK CHECK<br/>Wire ADD E28 pin 13 to E15 pin 10<br/>NEW REVISION<br/>Rework etch C D E to CS J</p>                 |
| <p>3 G231-B0001 MAY 72<br/>QUICK SYNOPSIS<br/>Prevents components on G231 shorting to<br/>module above it<br/>QUICK CHECK<br/>Two phenolic 7/16" standoffs on module<br/>NEW REVISION<br/>Rework etch B to CS C</p>   | <p>1 G110-D0012 DEC 72<br/>QUICK SYNOPSIS<br/>Provides print clarification affecting etch C<br/>G110's<br/>NEW REVISION<br/>CS E5</p>   |
| <p>2 G231-D0003 AUG 72<br/>QUICK SYNOPSIS<br/>Improves -15V and strobe margins when<br/>operating at 55°C<br/>QUICK CHECK<br/>Sixteen D672 diodes replace 330 ohm<br/>resistors<br/>NEW REVISION<br/>Rework etch B to CS F</p>                                | <p>1 G110-D0013 DEC 72<br/>QUICK SYNOPSIS<br/>Ensures PAL and PBL data bits gate high onto<br/>the BUS<br/>QUICK CHECK<br/>Wire ADD's E40 pin 4 to pin 13 and E40 pin 9<br/>to pin 12<br/>NEW REVISION<br/>Rework etch C to CS E6</p> |
| <p>4 G231-A0005 AUG 72<br/>QUICK SYNOPSIS<br/>Improves DC LO and AC LO circuit operation<br/>QUICK CHECK<br/>Wire ADD from R89 to R93<br/>NEW REVISION<br/>Rework etch C to CS E1</p>   | <p>1 G231-D0008 DEC 72<br/>QUICK SYNOPSIS<br/>G231 prints redrawn to DEC standards<br/>NEW REVISION<br/>CS E4</p>   |

MM11-L  
8K 16 BIT MIL MEMORY  
FCO Cross Reference

A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- 11** G109-C0004 DEC 72  
QUICK SYNOPSIS  
Replaces +3V with INIT L to reset STROBE  
one-shot  
QUICK CHECK  
Wire ADD E28 pin 13 to E15 pin 10  
NEW REVISION  
Rework etch C E to CS E3
- 12** G110-C0015 MAR 73  
QUICK SYNOPSIS  
Allows longer memory cycle time on systems  
with high speed NPR devices  
QUICK CHECK  
DL3 changed from 100nsec to 125nsec delay  
NEW REVISION  
Rework etch C to CS E7
- 13** G110-CD016  
QUICK SYNOPSIS  
Eliminates noise on BUS INIT etch  
QUICK CHECK  
Wire ADD's E4 pin 4 to E7 pin 7 AA1 feed  
thru to E7 pin 6  
NEW REVISION  
Rework etch C to CS E8
- 14** G109-C0006 MAR 73  
QUICK SYNOPSIS  
Lengthens memory cycle time  
QUICK CHECK  
DL3 replaced with 125nsec delay  
NEW REVISION  
Rework etch C to CS E4
- 15** G109-C0007 MAR 73  
QUICK SYNOPSIS  
Eliminates noise coupling onto BUS INIT etch  
from data line etches  
QUICK CHECK  
Wire ADD E4 pin 4 to E7 pin 7  
NEW REVISION  
Rework etch C to CS E
- 16** G110-B0018 APR 73  
QUICK SYNOPSIS  
Eliminates noise on STROBE O H etch  
QUICK CHECK  
Twisted pair E32 pin 6 feed thru to E58 pin 4  
feed thru/E33 pin 7 to ground side of C4  
NEW REVISION  
Rework etch C to CS E9
- 17** G109-C0010 JUL 73  
QUICK SYNOPSIS  
Eliminates noise induced condition where  
memory randomly picks up and drops bits  
QUICK CHECK  
E32 pin 6 feed thru to E58 pin 14 feed  
thru/E33 pin 7 to ground side of C44  
NEW REVISION  
Rework etch C to CS E7
- 18** G110-C0019 NOV 73  
QUICK SYNOPSIS  
Widening R/W Reset L prevents memory  
skipping a restore cycle  
QUICK CHECK  
E26 pin 8 goes to tap 10 of Delay line  
NEW REVISION  
Rework etch C to CS E10
- 19** G109-C0011 NOV 73  
QUICK SYNOPSIS  
Lengthens R/W flip-flop reset input pulse to  
prevent skipped memory cycles on a read  
QUICK CHECK  
E26 pin 8 goes to top 10 of the Delay line  
NEW REVISION  
Rework etch C to CS E8

ECO  
QUICK CHECK

NOV./74

MM11-L PARTS BREAKDOWN

G110	- Control and Data Loops
G231	- Memory Driver
H214	- 8K 16 Bit Memory Stack
MM11-L	- One 8K 16 Bit Bank of Memory

0 1 2 3 4 5 6 7 8 9 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

R

JAN./75

MM11-L FIELD CODED ECO'S

G110	B4, B5, C9, C10 & A, D12, D13 & A, C15 & A, C16, B18, C19
G231	B1, D3, A5, D9

March/75

MM11-L ECO PARTS

<u>NAME</u>	<u>ECO #</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS &amp; DESCRIPTION</u>
G110	#4	1	13-00365	Resistor
	#5	1	10-05306	Capacitor
		4	90-08213	Standoffs
	#9	A/R	17-00024	#10 black/wire ground wire
	#10	1	19-05547	I.C.
	#15	1	16-11327	Delay
	#18	1	10-01610	Capacitor
G231	#1	2	90-06892	Standoffs
	#3	16	11-05275	Diode
	#15	A/R	90-09185	Jumper Wire

G110 CONTROL & DATA LOOPS				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1	CF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO				QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	03/72	A	C		R118 is a 220 ohm resistor R118 is left of E28 and right of DL3 or possibly under DL3 E28 is the 6th I.C. from BE1 DL3 is the small delay line right of DL1 DL1 is the biggest delay line					N11						
00002	03/72	B	C		DL3 is a 100n sec. delay line with part number D-10100 and/or 1609559 DL3 is a small delay line just right of DL1-08 DL1 is the biggest delay line on board DL3 CHANGED TO 125 N SEC. (P/N-322-1) AND/OR 1611327 BY ECO #15 +15A					N11						
00003	08/72	C	D		R113 is a 120 ohm 1/2W 5% resistor R113 is located at AS1 below DL2 DL2 is between E1 and E2					N11						
B 00004	08/72	D	C	1.0	NOTE: This ECO affects only "C" etch modules R115 is a 1K 1/2W 5% resistor R115 is the 3rd resistor right of DL1-12 DL1 is the biggest delay line				1	13-00365						
B 00005	08/72	E	C	3.0	NOTE: This ECO affects only "C" etch modules C152 is a 6.8 ufd. capacitor with the cathode connected to the + etch on board. C152 is the capacitor right of DL1 -02 DL1 is the biggest delay line				1 4	10-05306 90-08213						

G110 CONTROL & DATA LOOPS				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00006	11/72	F	E		R123 is a 390 ohm 1/4W 5% resistor R123 is the closest resistor to BS1				N11						
00007	09/72	E1	C		4 - Standoffs <u>screwed</u> on				N11						
00008	10/72	E2	C		C47 is a .01 uf 100V 20% disc capacitor C47 is directly below E40 E40 is the 1st I.C. from CT1 DO NOT COUNT PULSE TRANSFORMER AS I.C.				N/A						
C 00009	12/72	E3	C	.5	Four #18 gauge black ground jumpers on SIDE ONE INSTEAD OF ON SIDE # TWO				17-00024 (#18 black & white teflon coated)						
C 00010 & 10A	11/72	E4	C	1.0	Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1. E28 is the 6th I.C. from BE1.			1	19-05547	DZQKB					
00011	12/72				<u>NOTE:</u> This ECO deleted				N/A						
D 00012	12/72	E5	C	N/A	<u>NOTE:</u> Print update affecting only "C" etch modules.				N11						

G110 CONTROL & DATA LOOPS				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
D 00013 & 13A	01/73	E6	C	.5	NOTE: Rework only "C" etch modules Jumper pin 4 to 13 on spare I.C. slot above E40 E40 is the 1st I.C. from CT1				N11	DZQMB					
00014	03/73	K	F		NOTE: This ECO affects only CS "F" etch "E" modules Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1				N/A						
00014A	03/73	K	F		NOTE: This ECO affects E & F etch revs modules DL3 is 125 n sec. delay line with P/N 1-322-1 and or 1611327 DL3 is small delay line right of the big delay line				N/A						
C 00015 & 15A	05/73	E7	C	1.0	NOTE: This ECO affects "C" etch rev modules DL3 is 125 n sec. delay line with P/N L-00-01 and/or 1611327 DL3 is small delay line right of the big delay line			1	16-11327	DZMMG DZQKB DZQGA					
C 00016	06/73	E8	C	2.0	NOTE: Rework only "C" etch rev modules Jumper E04-04 to E07-07				N11	DZMMG DZQKB DZQGA					
00017	12/73	L	F		NOTE: This ECO affect only "E" & "F" etch rev modules Jumper E04-04 to E07-07				N11						

CONTROL & DATA LOOP				ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 4 OF 4
G110															
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00018	10/73	E9	C	1.0	NOTE: Rework etch "C" Rev White wire of twisted pair from E32-06 feed through to E58-14 E32 is the 4th I.C from BS1 E58 is the 1st I.C from FC1			1	10-01610						
C 00019	12/73	E10	C	1.0	NOTE: Rework "C" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line				NIL	DZQMB					
00020 &A	01/74	M	H		NOTE: Affects "F" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line				N/A						
00021	07/74	N N E11 E11	H F E C		NOTE: Phase in DEC 8640's to replace DEC 380's				N/A						
00022	05/76	P	H		NOTE: DEC 7438 allowable I.C. substitution for 74H01-1 at E5, E18-E22				NIL						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00001	6/72	C	C	3.0	Two standoffs to prevent shorting			2	90-06892						
00002	8/72	D	D		Four standoffs on module				Nil						
D 00003	8/72	E	D	4.0	NOTE: Rework only "C" etch modules D116 is a D672 diode instead of being a resistor D116 is the only diode right of E1			16	11-05275	DZMMI					
00004 & 4A	8/72	F	E		E2 is a DEC I.C. 1074H00 E2 is the I.C. closest to the top left corner.				Nil						
A 00005	8/72	E1	C	4.0	NOTE: Rework only G231's with etch rev "C" which are in 11/05 and ME11 systems. 11/45 memories do <u>not</u> need this ECO Jumper from R101 to Q7 R101 is the 3rd resistor from bottom left corner Q7 is the biggest transistor from EL1				Nil						
00006	8/72	E2	C		R170 is a 100 ohm 1/4W 5% resistor R170 is the 2nd resistor from top edge of board in the 1st row of resistors left of E1				Nil						
00007	9/72	E3	C		NOTE: Print update				Nil						

G231 MEMORY DRIVER			ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CS NAME
00008	9/72	E1A E2A E3A	C C C		C52 is a 470 pfd 100V 5% capacitor C52 is at the far left of DR1 and the only component between two transistors				Nil					
D 00009	12/12	E4	C	N/A	NOTE: Field service clarification for etch "C" modules				Nil					
00010	3/73	H	E		E1 is a DEC I.C. 4011 quad transistor				N/A					
00011	4/73	E5	C		E1 is a DEC I.C. 4011 quad transistor				N/A					
00012	4/73	J	E		NOTE: Affects etch "E" rev only R176 is a 4.7K 1/4W 5% resistor R176 is the 1st resistor below two transistors at the far left of EJ1				N/A					
00013	11/73	K	E		NOTE: I.C. substitution cancelled by ECO # 16				N/A					
00014	2/74	L	E		Q12 as snap-on heat sink Q12 is closest transistor to bottom left corner.				N/A					
00015	6/74	M	E ALL		NOTE: This ECO affects all etch rev modules. J1 & J2 have insulated jumper wire J1 & J2 are between E31 and E34 E31 is the last I.C. from CD slot				N/A					
00016	/74	N E6	E C		NOTE: I.C. 380 and 7380 are unsuitable E9, E15, E16, E17 are I.C. DEC 8640's E9 is the last I.C. from AV1 E15 is the 1st I.C. from BF1				N/A					


G231 MEMORY DRIVER		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYG CONT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00017	01/75	P	E		Q6 is a <u>DEC 6534C</u> transistor Q6 is the <u>last</u> transistor from EJ1		N/A						
00018	04/75	R	E		<u>NOTE:</u> Phase in jumper wire For current loops using teflon insulated wire		N/A						

H214 - 8K x 16 BIT MEMORY STACK		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	FROM	TO	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MANDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL	DATE INSTALLED	CS
00001	6/72	B			NOTE: Print change			Nil					
00002	1/73	C			NOTE: Reference chart for H214, H215, H216 and G645 etch & CS revs			Nil					
00003	6/73	D			NOTE: Allowable I.C. substitution is DEC 2501 to DEC 2501-01, 2501-02, 2501-03			N/A					
00004	10/73	E			NOTE: Print correction			Nil					
00005	11/73	F			NOTE: Print correction			Nil					
00006	07/74	H			NOTE: Documentation update			Nil					
00007 52	12/74	J			NOTE: DOCUMENTATION FOR AMPLE STACK			Nil					

H214 - 8K x 16 BIT MEMORY STACK		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
---------------------------------	--	------	--------	-----------------	-----	-----------------	----------	-----	-----	-----------	------	-----	-------------

ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00001	6/72	B			<u>NOTE:</u> Print change		Nil					
00002	1/73	C			<u>NOTE:</u> Reference chart for H214, H215, H216 and G645 etch & CS revs		Nil					
00003	6/73	D			<u>NOTE:</u> Allowable I.C. substitution is DEC 2501 to DEC 2501-01, 2501-02, 2501-03		N/A					
00004	10/73	E			<u>NOTE:</u> Print correction		Nil					
00005	11/73	F			<u>NOTE:</u> Print correction		Nil					
00006	/74	H			<u>NOTE:</u> Documentation update							

MM 1 1 - LP

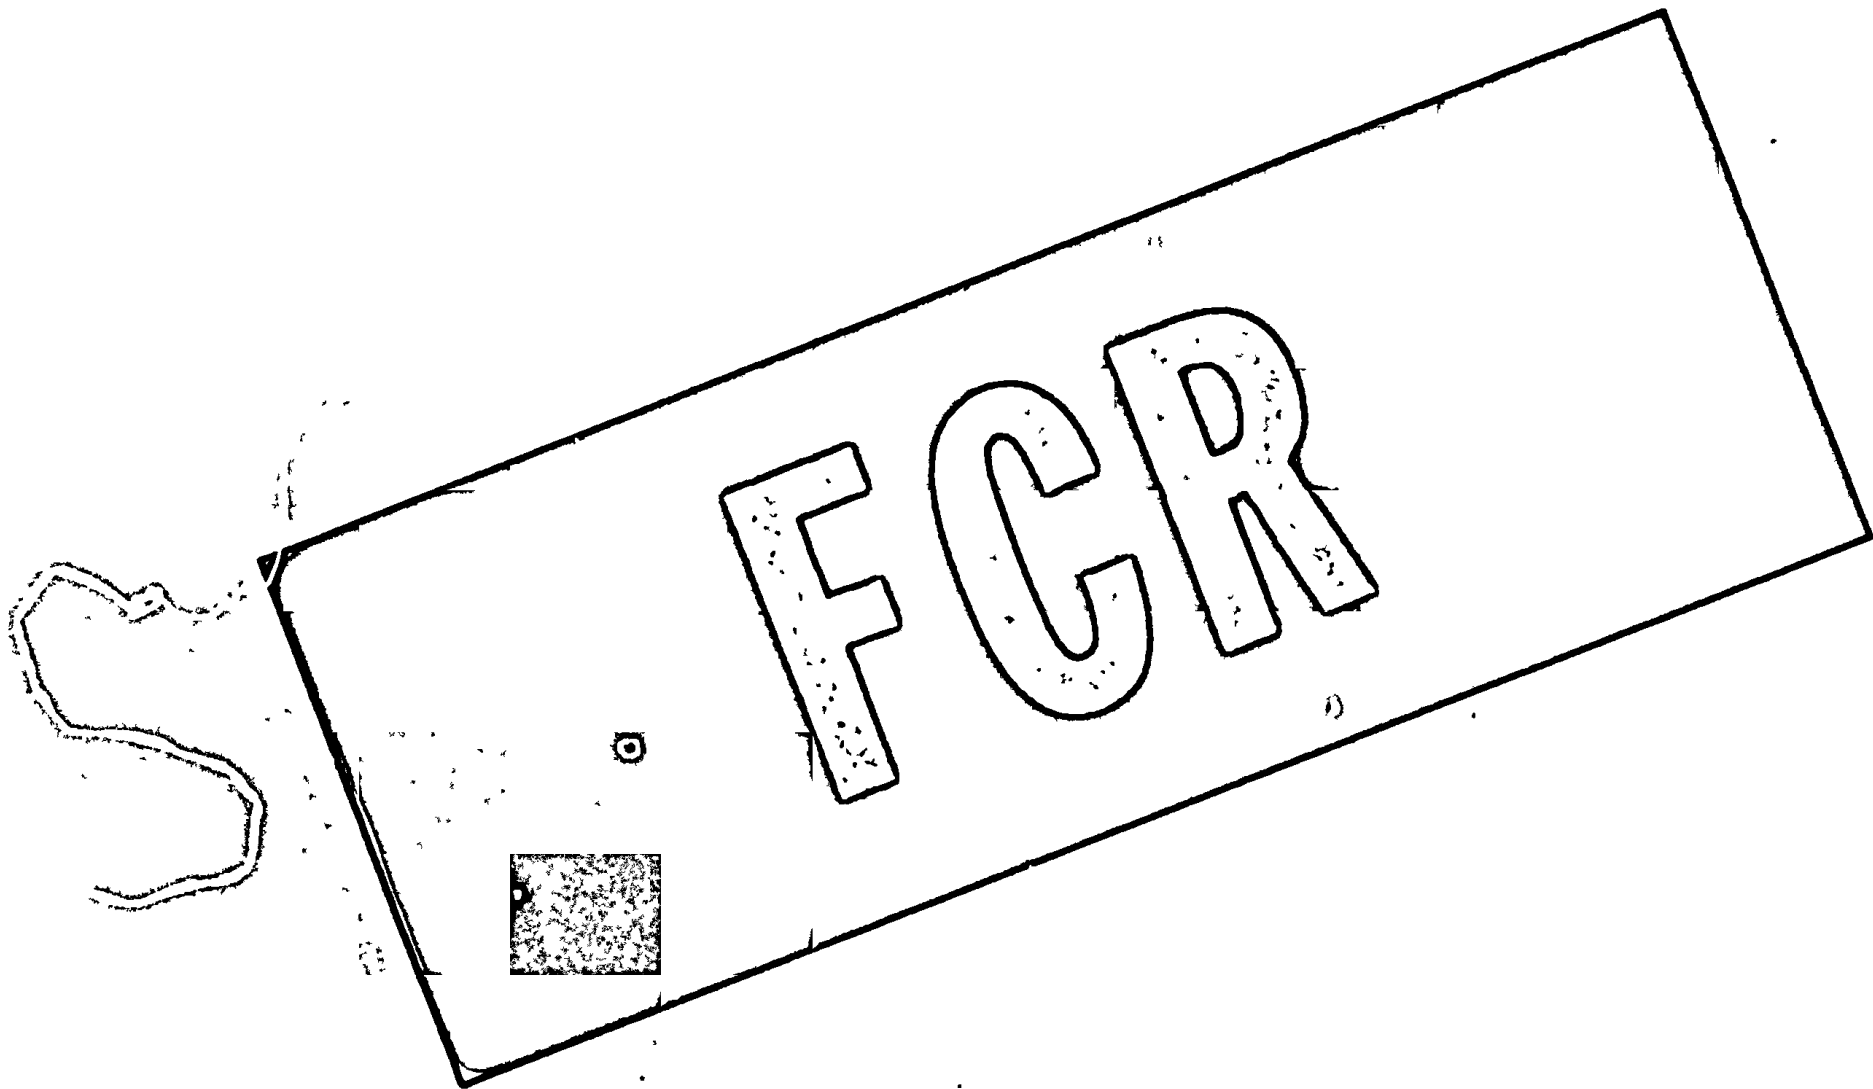

**MM11-LP**  
**8K 16 BIT PARITY (18 BIT) MEMORY MODULE SET**  
**FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- |   |  |
|---|--|
| <p><b>1</b> <b>G231-B0001 MAY 72</b><br/><b>QUICK SYNOPSIS</b><br/>Prevents components on G231 shorting to module above it<br/><b>QUICK CHECK</b><br/>Two phenolic 7/16 standoffs on module<br/><b>NEW REVISION</b><br/>Rework etch B to CS C</p>         | <p><b>2</b> <b>G109-C0007 MAR 73</b><br/><b>QUICK SYNOPSIS</b><br/>Eliminates noise coupling onto BUS INIT etch from data line etches<br/><b>QUICK CHECK</b><br/>Wire ADD E4 pin 4 to E7 pin 7<br/><b>NEW REVISION</b><br/>Rework etch C to CS E</p>   |
| <p><b>2</b> <b>G231-D0003 AUG 72</b><br/><b>QUICK SYNOPSIS</b><br/>Improves 15V and strobe margins when operating at 55° C<br/><b>QUICK CHECK</b><br/>Sixteen D672 diodes replace 330 ohm resistors<br/><b>NEW REVISION</b><br/>Rework etch B to CS F</p> | <p><b>2</b> <b>C109-C0010 JUL 73</b><br/><b>QUICK SYNOPSIS</b><br/>Eliminates noise induced condition where memory randomly picks up and drops bits<br/><b>QUICK CHECK</b><br/>Twisted pair E32 pin 6 feed thru to E58 pin 14 feed thru/E33 pin 7 to ground side of C44<br/><b>NEW REVISION</b><br/>Rework etch C to CS E7</p> |
| <p><b>3</b> <b>G231-A0005 AUG 72</b><br/><b>QUICK SYNOPSIS</b><br/>Improves AC LO and DC LO circuit operation<br/><b>QUICK CHECK</b><br/>Wire ADD from R89 to R93<br/><b>NEW REVISION</b><br/>Rework etch C to CS E1</p>                                  | <p><b>3</b> <b>G109-C0011 NOV 73</b><br/><b>QUICK SYNOPSIS</b><br/>Lengthens P/W flip flop reset input pulse to prevent skipped memory cycles on a read<br/><b>QUICK CHECK</b><br/>E26 pin 8 goes to top of 10 of the Delay line<br/><b>NEW REVISION</b><br/>Rework etch C to CS E8</p>  |
| <p><b>4</b> <b>G231-D0009 DEC 72</b><br/><b>QUICK SYNOPSIS</b><br/>G231 prints redrawn to DEC standards<br/><b>NEW REVISION</b><br/>CS E4</p>   | <p><b>4</b> <b>G109-C0004 DEC 74</b><br/><b>QUICK SYNOPSIS</b><br/>Replaces +3V with INIT L to reset STROBE one shot<br/><b>QUICK CHECK</b><br/>Wire ADD E28 pin 13 to E15 pin 10<br/><b>NEW REVISION</b><br/>Rework etch C E to CS E3</p>   |
| <p><b>4</b> <b>G109-C0006 MAR 73</b><br/><b>QUICK SYNOPSIS</b><br/>Lengthens memory cycle time<br/><b>QUICK CHECK</b><br/>DL3 replaced with 125 nsec delay<br/><b>NEW REVISION</b><br/>Rework etch C to CS E4</p>   |  |

**ECO  
QUICK CHECK**

NOV./74

MM11-LP PARTS BREAKDOWN

G109	- Control & Data Loops
G231	- Memory Driver
H215	- 8K 16 Bit Memory Stack
MM11-LP	- One 8K Parity Memory Bank

CLASS 1

MAR/76

MM11-LP FIELD CODED ECO'S

G109

- C4, C6, C7, C10, C11

G231

- B1, D3, A5, D9

JAN./75

MM11-LP ECO PARTS

<u>NAME</u>	<u>ECO #</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS &amp; DESCRIPTION</u>
G109	# 3, 3A	8	10-00064	Capacitor
		4	10-01610	Capacitor
		1	13-00309	Capacitor
		5	13-05324	Resistor
G109	# 6	1	16-11327	Delay
G109	# 10	1	10-01610	Capacitor
		A/R	91-07720-09	White Wire
G231	# 1	2	90-06892	Standoffs
G231	# 3	16	11-05275	Diode
G231	# 15	A/R	90-09185	Jumper Wire
M7259	# 4	1	13-01874	Resistor
		1	13-09143-11	Resistor

G109 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECC	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAM
00001	12/72	F	E		NOTE: New etch Rev			NIL					
00002 &A	12/72	E1	C		Standoffs are screwed on			N/A					
00003 &A	01/73	E2	C		C47 is a .01uf , 100V 20% disc capacitor C47 is directly below E40 E40 is the 1st I.C. from CT1 NOTE: DO NOT COUNT PULSE TRANSFORMER		8 4 1 5	10-000064 10-01610 13-00309 13-05324					
C 00004	01/73	E3	C	2.0	NOTE: Rework G109-YA only for parity memory Jumper from E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1			NIL	DZMFA				
00005	05/73	K	F		NOTE: Affects etch "E" and "F" revs DL3 is 125 n sec. delay line with part number L-00-01 and/or 16-11327 DL3 is the small delay line left of E28 E28 is the 6th I.C. from BE1			NIL					
C 00006	05/73	E4	C	1.0	NOTE: Affects etch "C" revs DL3 is a 125 n sec. delay line part number L-00-01 and/or 16-11327 DL3 is a small delay line left of E28 E28 is the 6th I.C. from BE1		1	16-11327	DZMCG DZQMB				

G'09 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NA
C 00007	05/73	E5	C	1.0	NOTE: Affects etch "C" rev G109 & G109-YA modules Jumper E04-04 to E07-07			NIL	DZQKB				
00008 &A	06/75	E6	C		NOTE: 1) Affects etch "C" revs. 2) Generate separate G109-YA documentation 3) Change component substitution list R96 is a 82 ohm 1/4W 5% resistor R96 is right of E44 E44 is the 2nd I.C. left of DA1			NIL					
00009	12/73	L	F		NOTE: Affects etch "E" & "F" rev - G109 and G109-YA. Jumper E04-04 to E07-07		1	10-01610					
C 00010	12/73	E7	C	1.0	NOTE: Affects etch "C" rev White jumper from E32-06 to E58-14 E32 is the 4th I.C. from BS1 E58 is the 1st I.C. from FC1		1 A/R	10-01610 91-07720-09					
C 00011	12/73	E8	C	1.0	NOTE: Rework etch "C" rev Jumper or etch run from E26-08 to tap 10 of DL1 E26 is the 4th I.C. from BE1 DL1 is the biggest delay line			NIL	DZQMB				
00012 &A	06/74	M	H		NOTE: Affects etch "F" rev Jumper E26-08 to DL1-10 E26 is the 3rd I.C. from BE1 DL1 is the biggest delay line			N/A					

G109		CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAM	
00013	07/74	E9	C		NOTE: Phase in DEC 8640 to replace DEC 380 and DEC 7380 chips.			8	19-11469						
00014	05/76	P	H		NOTE: DEC 7438 allowable I.C. substitution for 74H01-1 at E5, E18 to E22.				NIL						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE 1 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CS	
B 00001	6/72	C	C	3.0	Two standoffs to prevent shorting			2	90-06892						
00002	8/72	D	D		Four standoffs on module				Nil						
D 00003	8/72	E	D	4.0	NOTE: Rework only "C" etch modules D116 is a D672 diode instead of being a resistor D116 is the only diode right of E1			16	11-05275	DZMMI					
00004 & 4A	8/72	F	E		E2 is a DEC I.C. 1074H00 E2 is the I.C. closest to the top left corner.				Nil						
A 00005	8/72	E1	C	4.0	NOTE: Rework only G231's with etch rev "C" which are in 11/05 and ME11 systems. 11/45 memories do <u>not</u> need this ECO Jumper from R101 to Q7 R101 is the 3rd resistor from bottom left corner Q7 is the biggest transistor from E1				Nil						
00006	8/72	E2	C		R170 is a 100 ohm 1/4W 5% resistor R170 is the 2nd resistor from top edge of board in the 1st row of resistors left of E1				Nil						
00007	9/72	E3	C		NOTE: Print update				Nil						

G2J1 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH #	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00008	9/72	E1A E2A E3A	C C C		C52 is a 470 pfd 100V 5% capacitor C52 is at the far left of DRI and the only component between two transistors				Nil						
D 00009	12/12	E4	C	N/A	NOTE: Field service clarification for etch "C" modules				Nil						
00010	3/73	H	E		E1 is a DEC I.C. 4011 quad transistor				N/A						
00011	4/73	E5	C		E1 is a DEC I.C. 4011 quad transistor				N/A						
00012	4/73	J	E		NOTE: Affects etch "E" rev only R176 is a 4.7K 1/4W 5% resistor R176 is the 1st resistor below two transistors at the far left of EJ1				N/A						
00013	11/73	K	E		NOTE: I.C. substitution cancelled by ECO # 16				N/A						
00014	2/74	L	E		Q12 as snap-on heat sink Q12 is closest transistor to bottom left corner.				N/A						
00015	6/74	M	E ALL		NOTE: This ECO affects all etch rev modules. J1 & J2 have insulated jumper wire J1 & J2 are between E31 and E34 E31 is the last I.C. from CD slot				N/A						
00016	/74	N E6	E C		NOTE: I.C. 380 and 7380 are unsuitable E9, E15, E16, E17 are I.C. DEC 8640's E9 is the last I.C. from AV1 E15 is the 1st I.C. from BF1				N/A						

G231 MEMORY DRIVER					ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYG. UNIT	SLOT	IPB	PAGE 3 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME				
00017	01/75	P	E		Q6 is a <u>DEC 6534C</u> transistor Q6 is the <u>last</u> transistor from EJ1		N/A									
00018	04/75	R	E		<u>NOTE:</u> Phase in jumper wire For current loops using teflon insulated wire		N/A									

REVISION DATE MAR/77

ECO		RELEASE DATE	CC	FROM	TO	ECO NO.	DESCRIPTION	QTY	PARTS REQUIRED	HANDERS REQUIRED	PRINTERS REQUIRED	ACTUAL INSTALL	DATE	BY
M215 8K x 16 BIT MEMORY STACK							ETCH							
							OPTION							
							OPTION SERIAL #							
							PCP							
							SYSTEM SERIAL #							
							LOCATION							
							CAB							
							BOX							
							SYS. UNIT							
							SLOT							
							IPB							
							PAGE							
							1 OF 1							

MM11-S

MM11-S PARTS BREAKDOWN

7008816	-Backplane Assembly
7008855-2B	-11/45 MM11 Power Cable (old)
7008909	-11/40 MM11 Power Cable (old)
7009562	-G772 System Unit Harness (new)
G110	-Control & Data Loops
G231	-Memory Drivers
H214	-8K Bank of Core Memory
BC11-A	-Unibus Cable
M920	-Unibus Jumper
MM11-S	-Single Backplane Unit

DOOL

**digital** EQUIPMENT CORPORATION  
MAYNARD MASSACHUSETTS

Engineering Change  
Order Log  
DEC O LOG

**MM11-S**

8K 16 Bit,  
890 ns Memory

2716 R624

PROCESSOR TYPE PDP 11/45

MM11S 0001 (CODE D) WE A  
NOTE: PROBLEM Missing a res on MM11S back plane for signal  
NIN.H  
CORRECTION: AM three wires in Wire List  
In plant effects by all research immediately

MM11S 0002 (CODE P)  
NOTE: CORRECTION: Make corrections to Drawing Three and R111  
MM11S  
In plant effects by all documentation change only

MM11S 0003 (CODE P)  
NOTE: PROBLEM: Under some conditions when other options are  
placed inside an MM 11S bus to operate correctly  
CORRECTION: Install a 4 0000 resistor protection gate

NOTE: This fix is required when other options such as AM 1 etc are  
placed inside an MM 11S memory. Some generated by the  
MM 11S may interact with adjacent modules  
In plant effects by phase 1  
In plant effects by MM 11S memories as required  
In plant effects by MM 11S memories as required  
In plant effects by MM 11S memories as required

MM11S 0004 (CODE P) DD C  
NOTE: CORRECTION: AM Manufacturing Test Equipment of MM  
K 11 M and S and drawing AM MM 11 Meters and Systems  
drawing 0111111  
In plant effects by all documentation change only

**THIS DOCUMENT WAS NOT PRODUCED  
FOR MICROFICHE; THEREFORE, ONLY  
PARTS OF IT ARE READABLE.**

FECO'S

<b>ENGINEERING CHANGE ORDER</b>	ORIGINATOR R. Manion 1-3 TEL EXT 2005 DATE 10/16/72 DESC PROJ NO <b>896A 06315</b> COST CENTER NO 392 <b>W.O. 1732</b>	ECO NO <b>MM11-00003</b> SHEET <b>1</b> OF <b>2</b> DATE RECEIVED <b>10-17-72</b> FIRST ISSUE <b>10-19-72</b> FINAL ISSUE <b>11-14-72</b>
-------------------------------------	--	---

**PROBLEM**  
Under some conditions when other options are placed along side an MM11/S they fail to operate correctly.

**UNIT TO BE CHANGED**  
**MM11/S  
MEMORY**  
DISP CODE \*02

**CORRECTION**  
Install a module protection plate.

**OPTIONS AFFECTED**  
**MM11/S  
MM11/SP**

**BREAK-IN/EFFECTIVITY**  
\*Install on all units in production.  
Install in field if required.

**PRODUCT LINES AFFECTED**  
**PDP11/45**

ITEM NO	DOCUMENT/PART NO	OLD REV	NEW REV	DISP CODE	DESCRIPTION OF CHANGE
1.	B-DD-MM11-S	A	B	06	(Drawing Directory) Change per this ECO.  (Module Protection Plate) Add B-MD-7408490-0 to drawing directory.

**DOCUMENTATION AFFECTED**

MODEL  
 DIAGNOSTICS  
 TECH MANUAL  
 TESTER  
 TEST PROG  
 TOOLING  
 PKG INST  
 ENG SPEC  
 PURCH SPEC

**FIELD SERVICE AFFECTED**

YES  NO  
 Customer Charge  
 Product Line Charge

**TYPE OF CHANGE**

ELECTRICAL  
 MECHANICAL  
 MODULE

**ORDER PR MODEL**

YES  
 NO


- DISPOSITION CODES**
- 00 - RETURN TO STOCK
  - 01 - (DELETED)
  - 02 - USE PRESENT STOCK UNTIL NEW STOCK AVAILABLE (PHASE IN)
  - 03 - REWORK IMMEDIATELY (RETROFIT)
  - 04 - (DELETED)
  - 05 - (DELETED)
  - 06 - DOCUMENT CORRECTION
  - 07 - NEW ITEM (THIS ASSEMBLY)
  - 08 - NEW ITEM (THIS COMPANY)
  - 09 - SCRAP IMMEDIATELY

**APPROVAL SIGNATURES**

DESIGN ENGR Pete Durant *P. Durant*  
 ENG MGR (OPT) \_\_\_\_\_  
 FIELD SERVICE (OPT) \_\_\_\_\_  
 CHIEF ENGR (MODULES ONLY) \_\_\_\_\_

### MM115 REWORK SHEET

1. LOOSEN 2 SCREWS AT POINTS A. CARE SHOULD BE USED AT ALL TIME SO THAT NO WIRES ARE DAMAGED.
2. SLIDE THE FINGERS OF THE MODULE PROTECTION PLATE UNDER THE GND LUGS. THE PROTECTION PLATE SHOULD BE RIGHT AGAINST THE WIRED ASSY. FRAME, POINT B.
3. TIGHTEN SCREWS.

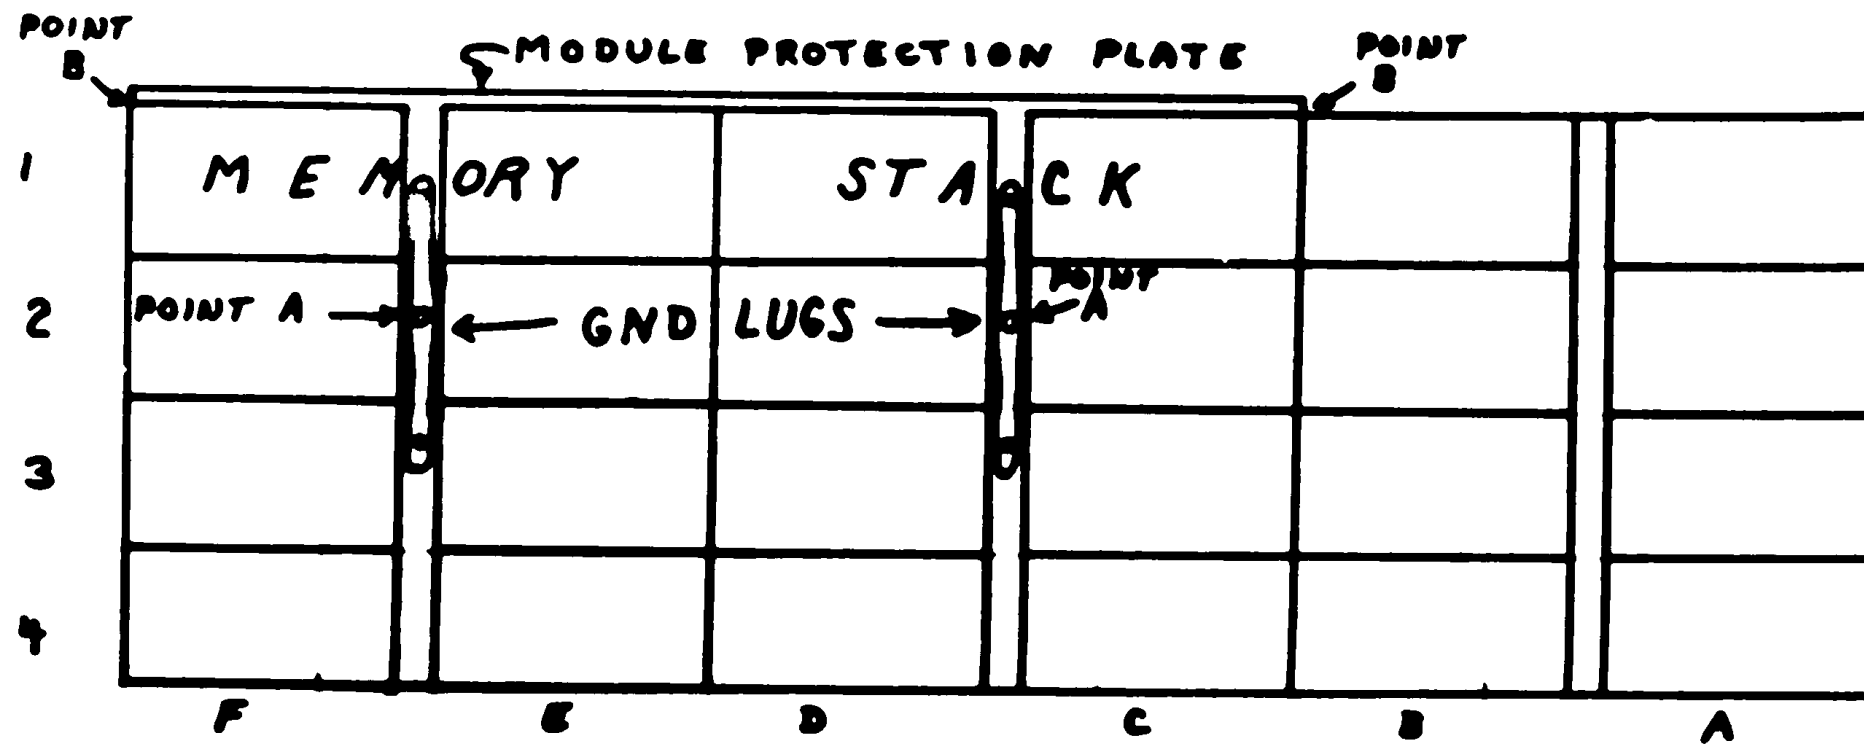

# FIELD CHANGE ORDER

FCO MM1S - C 0003  
PAGE      OF     

DATA PROCESSING AND DEC FCO LOG WILL POST THIS FCO WITH THE LEVEL OF URGENCY CODE REPLACING THE LEADING ZERO

FIELD INITIATIVE  
**Retrofit all MM1-S memories as required**

- \* LEVEL OF URGENCY (LUM)
- A MANDATORY HIGH PRIORITY
  - B MANDATORY
  - C HIGH PRIORITY IF SPECIFIC HARDWARE SOFTWARE, OR SYMPTOMS ARE PRESENT
  - D APPLICABLE IF SPECIFIC HARDWARE SOFTWARE, OR SYMPTOMS ARE PRESENT
  - E PRODUCT IMPROVEMENT OPTIONAL LOW PRIORITY

FIELD RETROFIT IS ANTICIPATED IN      % OF UNITS DEFINED ABOVE

NO CHARGE TO CUSTOMER ALL DEL. INSTALLATION LABOR AND MATERIAL ARE TO BE REPORTED UNDER A "W" CHARGE CODE

STANDARD APPLICABILITY THIS FCO IS TO BE INSTALLED AT NO CHARGE FOR WARRANTY AND MAINTENANCE CONTRACT CUSTOMERS IN ACCORDANCE WITH THE TECHNICAL EFFECTIVITY ABOVE OTHERWISE AT CUSTOMER EXPENSE

DOCUMENTATION S      PARTS S      DEC (ON SITE) LABOR S     

DEC'S MINIMUM BILLING APPLIES IF THIS FCO IS INSTALLED BY DEC THE DEL. LABOR CHARGE ASSUMES FCO INSTALLATION DURING REGULAR WORKING HOURS IF INSTALLATION OUTSIDE OF REGULAR WORKING HOURS IS ORDERED DEC'S LATEST SCHEDULE OF HOURLY RATES WILL APPLY

DEC INIT PROJECT NUMBER  
(FOR FIELD SERVICE REPORTING) **W67**

AVAILABILITY DELAY None NO PARTS

ESTIMATED DOWNTIME FOR INSTALLATION AND TESTING **0.5 HOURS**

SPECIAL TEST EQUIPMENT TOOLS OR SUPPLIES

FIELD OFFICE FCO DISTRIBUTION (LUM)

F IMMEDIATE FCO DISTRIBUTION TO ALL DEC FIELD OFFICES

R IMMEDIATE FCO DISTRIBUTION TO REGIONAL PRODUCT SUPPORT

LAST PREVIOUS FCO'S None

RELATED OR PREREQUISITE FCO'S

FCO KIT DISTRIBUTION

KITS AS DEFINED BELOW MAY BE ORDERED AS REQUIRED

- MAINTENANCE CHANGE
- MAINTENANCE MANUAL CHANGE
- OPERATIONAL PROGRAMS AFFECTED

CONTENTS OF AN FSIC INITIATED KIT				FSIC INITIATED FCO KITS WILL BE DISTRIBUTED FOR ALL UNITS LISTED ON THE EDP CONFIGURATION FILE WITH THE FOLLOWING SERVICE STATUS CODES
FIO	FCO	PRINTS	PARTS	
				D H A W
CONTENTS OF A FIELD ORDERED KIT				
FIO	FCO	PRINTS	PARTS	D H A W
	X	X	X	

REF CAT ON MAINDECS  
**11-DZQMB**

INSTALLATION AND TEST PREFERENCES

PARTS REQUIRED

Q1 74-08490 Module protection plate

**NOTES** This FCO is required when other options such as KM1-P, etc. are physically mounted next to an MM1-S memory. Noise generated by the MM1-S may interact with adjacent modules.

FIELD SERVICE APPROVAL  
Art Zins AKK

10/30 450

THIS DOCUMENT WAS NOT PRODUCED FOR MICROFICHE; THEREFORE, ONLY PARTS OF IT ARE READABLE.

FCR

**MM11-S**  
**8K, 16 BIT 18 MIL MEMORY**  
**FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

- |  |  |
|--|--|
| <p>■ <b>G231-B0001 MAY 71</b><br/><b>QUICK SYNOPSIS</b><br/>Prevents components on G231 shorting to module above it<br/><b>QUICK CHECK</b><br/>Two phenolic 7/16" standoffs on module<br/><b>NEW REVISION</b><br/>Rework etch B to CS C</p>        | <p>■ <b>G231-A0006 AUG 72</b><br/><b>QUICK SYNOPSIS</b><br/>Improves AC LO and DC LO circuit operation<br/><b>QUICK CHECK</b><br/>Wire ADD from R89 to R93<br/><b>NEW REVISION</b><br/>Rework etch C to CS E1</p>  |
| <p>■ <b>G110-B0004 MAY 72</b><br/><b>QUICK SYNOPSIS</b><br/>Corrects delay line 3 termination on C etch G110's<br/><b>QUICK CHECK</b><br/>R115 changed from 3K to 1K ohm<br/><b>NEW REVISION</b><br/>Rework etch C to CS D</p>                     | <p>■ <b>G110-D0012 DEC 72</b><br/><b>QUICK SYNOPSIS</b><br/>Provides print clarification affecting etch C G110's<br/><b>NEW REVISION</b><br/>CS E5</p>   |
| <p>■ <b>G110-B0005 MAY 72</b><br/><b>QUICK SYNOPSIS</b><br/>Corrects C152 insertion polarity (positive terminal) to +5V<br/><b>QUICK CHECK</b><br/>Positive terminal of C152 goes to +5V<br/><b>NEW REVISION</b><br/>Rework etch C, D to CS E</p>  | <p>■ <b>G110-D0013 DEC 72</b><br/><b>QUICK SYNOPSIS</b><br/>Ensures PAL and PBL data bits gate high onto the Bus<br/><b>QUICK CHECK</b><br/>Wire ADD's E40 pin 4 to pin 13 and E40 pin 9 to pin 12<br/><b>NEW REVISION</b><br/>Rework etch C to CS E6</p>      |
| <p>■ <b>G231-D0003 AUG 72</b><br/><b>QUICK SYNOPSIS</b><br/>Improves -15V and strobe margins when operating at 55°C<br/><b>QUICK CHECK</b><br/>Sixteen D672 diodes replace 330 ohm resistors<br/><b>NEW REVISION</b><br/>Rework etch B to CS F</p> | <p>■ <b>G110-C0015 MAR 73</b><br/><b>QUICK SYNOPSIS</b><br/>Allows longer memory cycle time on systems with high speed NPR devices<br/><b>QUICK CHECK</b><br/>DL3 changed from 100nsec to 125nsec delay<br/><b>NEW REVISION</b><br/>Rework etch C to CS E7</p> |
|  | <p>■ <b>G110-C0016 MAR 73</b><br/><b>QUICK SYNOPSIS</b><br/>Eliminates noise on BUS INIT etch<br/><b>QUICK CHECK</b><br/>Wire ADD S E4 pin 4 to E7 pin 7 AA1 feed thru to E7 pin 6<br/><b>NEW REVISION</b><br/>Rework etch C to CS E8</p>                      |

**MM11-S  
8K, 16 BIT 18 MIL MEMORY  
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

• Indicates FCO Conjunction Must Be Considered With Prior FCO

**10 G110-B0018 APR 73**

**QUICK SYNOPSIS**

Eliminates noise on STROBE O H etch

**QUICK CHECK**

E32 pin 6 feed-thru to E58 pin 4 feed-  
thru/E33 pin 7 to ground side of C44

**NEW REVISION**

Rework etch C to CS E9

**11 G110-C0019 NOV 73**

**QUICK SYNOPSIS**

Lengthening R/W RESET L prevents memory  
skipping a Restore cycle

**QUICK CHECK**

E28 pin 8 goes to Tap 10 of Delay line

**NEW REVISION**

Rework etch C to CS E10

**12 MM11S-C0003 OCT 73**

**QUICK SYNOPSIS**

Module protection plate eliminates MM11 S  
noise interaction with adjacent modules

**QUICK CHECK**

Presence of protection plate

ECO  
QUICK CHECK

NOV/74

MM11-S PARTS BREAKDOWN

7008816	-Backplane Assembly
7008855-2B	-11/45 MM11 Power Cable (old)
7008909	-11/40 MM11 Power Cable (old)
7009562	-G772 System Unit Harness (new)
G110	-Control & Data Loops
G231	-Memory Drivers
H214	-8K Bank of Core Memory
BC11-A	-Unibus Cable
M920	-Unibus Jumper
MM11-S	-Single Backplane Unit

JAN/75

MM11-S ECO PARTS

<u>NAME</u>	<u>ECO #</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS &amp; DESCRIPTION</u>
G110	# 4	1	13-00365	Resistor
	# 5	1	10-05306	Capacitor
		4	90-08213	Standoffs
	# 9	A/R	17-00024	# 10 black/white gd.wire
	#10	1	19-05547	I.C.
	#15	1	16-11327	Delay
	#18	1	10-01610	Capacitor
G231	# 1	2	90-06892	Standoffs
	# 3	16	11-05275	Diode
	#15	A/R	90-09185	Jumper wire
MM11-S	# 3	1	74-08490	Shield

MM11-S FIELD CODED ECO'S

G110	B4, B5, C9, C10 & A, D12, D13 & A, C15 & A, C16, B18, C19
G231	B1, D3, A5, D9
MM11-S	C3

MM11-S 8K 16 BIT MEMORY				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CD NAME	
00001	4/72		A		Jumper A01-U1 to A02-U1				Nil						
00002	9/72				<u>NOTE:</u> Print change				Nil						
C 00003	10/72			.5	A module protection plate beside MM11-S memory bank.			1	74-08490						
00004	11/72				<u>NOTE:</u> Adds test procedures for MM11-K, L, M, S and SP modules and systems				Nil						
00005	10/73				Jumper C02-A2 to F01-A2				Nil						
00006	2/74				<u>NOTE:</u> New harness (7009562) introduced for 15 pin power distribution. 11/40 and 11/45 with serial numbers greater than 6000 and 2000 respectively have a G772 system unit harness				N/A						
00007	05/75				<u>NOTE:</u> Document update				NIL						
00008	05/76				<u>NOTE:</u> Documentation update				NIL						

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE
													1 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
C0001	03/72	A	C		R118 is a 220 ohm resistor R118 is left of E28 and right of DL3 or possibly under DL3 E28 is the 6th I.C. from BE1 DL3 is the small delay line right of DL1 DL1 is the biggest delay line		N11						
00002	03/72	F	C		DL3 is a 100n sec. delay line with part number D-10100 and/or 1609559 DL3 is a small delay line just right of DL1-08 DL1 is the biggest delay line on board <u>DL3 CHANGED TO 125 N SEC. (P/N-322-1)</u> <u>AND/OR 1611327 BY ECO #15 +15A</u>		N11						
00003	08/72	C	D		R113 is a 120 ohm kW 5% resistor R113 is located at AS1 below DL2 DL2 is between E1 and E2		N11						
E 00004	08/72	D	C	1.0	<u>NOTE: This ECO affects only "C" etch modules</u> R115 is a 1K kW 5% resistor R115 is the 3rd resistor right of DL1-12 DL1 is the biggest delay line	1	13-00365					DZMMG DZMMI	
B 00005	08/72	E	C	3.0	<u>NOTE: This ECO affects only "C" etch modules</u> C152 is a 6.8 ufd. capacitor with the cathode connected to the + etch on board. C152 is the capacitor right of DL1 -02 DL1 is the biggest delay line	1 4	10-05306 90-08213						

G110 CONTROL & DATA LOOPS				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00006	11/72	F	E		R123 is a 390 ohm 1/2W 5% resistor R123 is the closest resistor to BS1				N11						
00007	09/72	E1	C		4 - Standoffs <u>screwed</u> on				N11						
00008	10/72	E2	C		C47 is a .01 uf 100V 20% disc capacitor C47 is directly below E40 E40 is the 1st I.C. from CT1 DO NOT COUNT PULSE TRANSFORMER AS I.C.				N/A						
C 00009	12/72	E3	C	.5	Four #18 gauge black ground jumpers on SIDE ONE INSTEAD OF ON SIDE # TWO				17-00024 (#18 black & white teflon coated)						
C 00010 & 10A	11/72	E4	C	1.0	Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1			1	19-05547	DZQKB					
00011	12/72				<u>NOTE:</u> This ECO deleted				N/A						
D 00012	12/72	E5	C	N/A	<u>NOTE:</u> Print update affecting only "C" etch modules.				N11						

G110 CONTROL & DATA LOOPS		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 4
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
D 00013 & 13A	01/73	E6	C	.5	NOTE: Rework only "C" etch modules Jumper pin 4 to 13 on spare I.C. slot above E40 E40 is the 1st I.C. from CT1		N11	DZQMB					
00014	03/73	K	F		NOTE: This ECO affects only CS "F" etch "E" modules Jumper E15-10 to E28-13 E15 is the 4th I.C. from AV1 E28 is the 6th I.C. from BE1		N/A						
00014A	03/73	K	F		NOTE: This ECO affects E & F etch revs modules DL3 is 125 n sec. delay line with P/N 1-322-1 and or 1611327 DL3 is small delay line right of the big delay line		N/A						
C 00015 & 15A	05/73	E7	C	1.0	NOTE: This ECO affects "C" etch rev modules DL3 is 125 n sec. delay line with P/N L-00-01 and/or 1611327 DL3 is small delay line right of the big delay line	1	16-11327	DZMMG DZQKB DZQGA					
C 00016	06/73	E8	C	2.0	NOTE: Rework only "C" etch rev modules Jumper E04-04 to E07-07		N11	DZMMG DZQKB DZQGA					
00017	12/73	L	F		NOTE: This ECO affect only "E" & "F" etch rev modules Jumper E04-04 to E07-07		N11						

CONTROL & DATA LOOP		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 4 OF 4
G110													
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00018	10/73	E9	C	1.0	NOTE: Rework etch "C" Rev White wire of twisted pair from E32-06 feed through to E58-14 E32 is the 4th I.C from BS1 E58 is the 1st I.C from FC1	1	10-01610						
C 00019	12/73	E10	C	1.0	NOTE: Rework "C" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 (Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line		NIL	DZQMB					
00020 6A	01/74	M	H		NOTE: Affects "F" etch rev Visual check of jumper or etch run from E26-08 to DL1 tap 10 ( Do Not Use Meter) E26 is the 4th I.C from BE1 DL1 is the biggest delay line		N/A						
00021	07/74	N N E11 E11	H F E C		NOTE: Phase in DEC 8640's to replace DEC 380's		N/A						
00022	09/76	P	H		NOTE: DEC 7438 allowable I.C. substitution for 74H01-1 at E5, E18-E22		NIL						

G231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
B 00001	6/72	C	C	3.0	Two standoffs to prevent shorting			2	90-06892						
00002	8/72	D	D		Four standoffs on module				Nil						
D 00003	8/72	E	D	4.0	NOTE: Rework only "C" etch modules D116 is a D672 diode instead of being a resistor D116 is the only diode right of E1			16	11-05275	DZMMI					
00004 & 4A	8/72	F	E		E2 is a DEC I.C. 1074H00 E2 is the I.C. closest to the top left corner.				Nil						
A 00005	8/72	E1	C	4.0	NOTE: Rework only G231's with etch rev "C" which are in 11/05 and ME11 systems. 11/45 memories do <u>not</u> need this ECO Jumper from R101 to Q7 R101 is the 3rd resistor from bottom left corner Q7 is the biggest transistor from E1				Nil						
00006	8/72	E2	C		R170 is a 100 ohm 1/4W 5% resistor R170 is the 2nd resistor from top edge of board in the 1st row of resistors left of E1				Nil						
00007	9/72	E3	C		NOTE: Print update				Nil						

H14

3231 MEMORY DRIVER				ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 3
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00008	9/72	E1A E2A E3A	C C C		C52 is a 470 pfd 100V 5% capacitor C52 is at the far left of DR1 and the only component between two transistors				Nil						
00009	12/12	E4	C	N/A	NOTE: Field service clarification for etch "C" modules				Nil						
00010	3/73	H	E		E1 is a DEC I.C. 4011 quad transistor				N/A						
00011	4/73	E5	C		E1 is a DEC I.C. 4011 quad transistor				N/A						
00012	4/73	J	E		NOTE: Affects etch "E" rev only R176 is a 4.7K 1/4W 5% resistor R176 is the 1st resistor below two transistors at the far left of EJ1				N/A						
00013	11/73	K	E		NOTE: I.C. substitution cancelled by ECO # 16				N/A						
00014	2/74	L	E		Q12 as snap-on heat sink Q12 is closest transistor to bottom left corner.				N/A						
00015	6/74	M	E ALL		NOTE: This ECO affects all etch rev modules. J1 & J2 have insulated jumper wire J1 & J2 are between E31 and E34 E31 is the last I.C. from CD slot				N/A						
00016	/74	N E6	E C		NOTE: I.C. 380 and 7380 are unsuitable E9, E15, E16, E17 are I.C. DEC 8640's E9 is the last I.C. from AV1 E15 is the 1st I.C. from BF1				N/A						

3231 MEMORY DRIVER		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 3 OF 3
--------------------	--	------	--------	-----------------	-----	-----------------	----------	-----	-----	-----------	------	-----	----------------

ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY.	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00017	01/75	P	E		Q6 is a DEC 6534C transistor Q6 is the <u>last</u> transistor from EJ1		N/A					
00018	04/75	R	E		<u>NOTE:</u> Phase in jumper wire For current loops using teflon insulated wire		N/A					

H214 - 8K x 16 BIT MEMORY STACK		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WJ	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL	DATE INSTALLED	CE
00001	6/72	B			NOTE: Print change			Nil					
00002	1/73	C			NOTE: Reference chart for H214, H215, H216 and G645 etch & CS revs			Nil					
00003	6/73	D			NOTE: Allowable I.C. substitution is DEC 2501 to DEC 2501-01, 2501-02, 2501-03			N/A					
00004	10/73	E			NOTE: Print correction			Nil					
00005	11/73	F			NOTE: Print correction			Nil					
00006	07/74	H			NOTE: Documentation update			Nil					
00007 62	12/74	J			NOTE: DOCUMENTATION FOR AMPLEX STACK			Nil					

K14

MM11-U/UP

FCR

**MM11-U  
16K CORE MEMORY/PARITY  
FCO Cross Reference**

**A Chronological Listing of Field Retrofit FCO's Which Must Be  
Considered in the Field Installation and Maintenance of This Option/Module/Power Supply**

**• Indicates FCO Conjunction Must Be Considered With Prior FCO**

**1 G235 S0009 SEP 76**

**QUICK SYNOPSIS**

Marginal memory under conditions of high  
drive current

**QUICK CHECK**

750 ohm resistor at + symbol near large etch

**NEW REVISION**

Rework etch D to CS N

ECO  
QUICK CHECK

D15

APRIL/77

NOTE: 1) MM11-U/UP are combined together for convenience

MM11-U/UP PARTS BREAKDOWN

G114	- 16K sense memory
G235	- 16K X-Y driver
H217-C	- parity memory stack (16K X 18 bit)
H217-D	- memory stack (16K X 16 bit)
M8239	- 16K timing module
MM11-U/UP	- 16K Core Memory/Parity

MM11-U/UP FIELD CODED ECO's

G114	- 15
G235	- 59

MM11-U/UP ECO PARTS

<u>NAME</u>	<u>ECO#</u>	<u>QTY</u>	<u>PART NUMBER</u>	<u>COMMENTS &amp; DESCRIPTION</u>
G235	09	1	13-05281-00	RESISTOR

G114 16K SENSE INHIBIT		ETCH	OPTION	OPTION SPECIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO	QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
CG001	10/73	B	B		<u>NOTE:</u> Cancelled By ECO# 1A		NIL						
00031A	10/73	B	B		Gnd Jumper from FT1 and along the bottom of the board	A/R	91-07470-00						
00002	11/73	C	B		R108 is a <u>56 OHM</u> , 1/2W, 5% resistor R108 to the right of T103 T103 is a transformer along AC1 near handle side.		N/A						
00003	10/74	D	C		<u>NOTE:</u> New Etch. Rev.		NIL						
00004	04/75	E	C		<u>NOTE:</u> Part substitution due to shortage		N/A						
I 00005	05/75	F	C	.5	<u>NOTE:</u> Affects only etch "C" rev's Measure open circuit from the top left metal handle to ground		NIL						

G235		16K X-Y DRIVER		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 2
					MF11-1										
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	07/73	D	D		R35 is a 3.16K, 1/8W, 1% resistor R35 is located below W4 W4 is left of E2-01 E2 is the 2nd I.C. from AT1			1 1	13-00229 13-03045						
00002	09/73	E	D		R92 is NOT a 330ohm, 1/2W, 5% resistor R92 is the 4th component above R101 R101 is 220 ohm, 2W resistor left at AT1			1 2 1	11-03441 13-00271 13-02379						
00003	11/73	F	D		R29 is a 120K, 1/2W 5% resistor R29 is the 1st resistor above Q14 Q14 is the transistor above E4 E4 is the 2nd I.C. from BL1				N/A						
00004	01/74	H	D		D2, D3, D4 are deleted No diodes between E2 and R18 R18 is a 100ohm resistor, above E2			1 1	15-05321 19-10466						
00005	04/74	J	D		C47 is a .022 ufd capacitor C47 is the 1st capacitor below T2 T2 is a transformer at the far left of AN1			2 1	10-11683 13-04855						
00006	08/74	K	D		Delete C44 Only one 47ufd, 20V, 10% capacitor still present (not two) between Q12 and Q13 Q12 and Q13 are the 1st and 2nd transistors from AE1				NIL						

G235 16K X-Y DRIVER		ETCH	OPTION	OPTION SERIAL#	PDP	SYSTEM SERIAL#	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 2 OF 2
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME
00007	04/75	L	D		NOTE: Parts substitution due to shortages			NIL					
I 00008	06/75	L	D		NOTE: Must have if used on MA20-M for PDP10 R23 is an 1K 1/2W resistor R23 is the only resistor left of AAI		1 1	13-00364 13-02388					
I 00009 6A	06/76	N	J		R103 is a 75 ohm 1W 5% resistor R103 is immediately right of Q12 Q12 is the 2nd transistor from AC1								

H15

H217 16K STACK		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAD	BOX	SYS. UNIT	SLOT	IPB	
ECO	RELEASE DATE	CS	ETCH WL	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO		QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATED	ACTUAL INSTALL TIME	DATE INSTALLED	CB NAME
00001	05/74				<u>NOTE:</u> Manufacturing Change			NIL					
00002	07/74				<u>NOTE:</u> Document Change			NIL					
00003	10/74	B	E		<u>NOTE:</u> Rework H217-B and C (18 or 19 Bit) Diodes D29, D30 are deleted D29, D30 were Diodes left of CE1 but right of the resistor network			NIL					
00004	03/76	C	E		<u>NOTE:</u> Manufacturing change.			NIL					

REVISION DATE MAY/76

M8293		16K UNIBUS TIMING		ETCH	OPTION	OPTION SERIAL #	PDP	SYSTEM SERIAL #	LOCATION	CAB	BOX	SYS. UNIT	SLOT	IPB	PAGE 1 OF 1
ECO	RELEASE DATE	CS	ETCH WI	ECO HRS. TIME	QUICK CHECK CAUTION - NOT COMPLETE ECO			QTY	PARTS REQUIRED	MAINDECS REQUIRED	PRINT SET UPDATE	ACTUAL INSTALL TIME	DATE INSTALLED	CE NAME	
00001	10/73	B	B		NOTE: This is a mandatory ECO Measure continuity from E21-03 to E25-13 E21 is the 2nd I.C. from CL1 E25 is below E21				NIL						
00002	11/73	C	B		NOTE: This is a mandatory ECO Measure continuity from E03-05 to DL3-05 DL3 is the only delay line left of AR1				NIL						
00003 EA	06/74	D	C		NOTE: New etch rev				N/A						
00004	06/75	E	C		NOTE: Phase in DEC 8640 to replace DEC 380				N/A						
00005	06/76	F	C B		NOTE: Introduces M8293-YB for XM15 M8293-YB can be distinguished by checking for jumper from E38-12 to E38-13 E38 is the 4th I.C. from DT1				NIL						

J15